

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753398

Luminaire Tested: LD4D75BD010-EU4DR5570959027-4LBS1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P753398
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR5570959027-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7116.9 lumens
Efficiency: N/A
Efficacy: 98.3 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P753398

CATALOG NUMBER: LD4D75BD010-EU4DR5570959027-4LBS1MW

Luminous Intensity Polar Plot

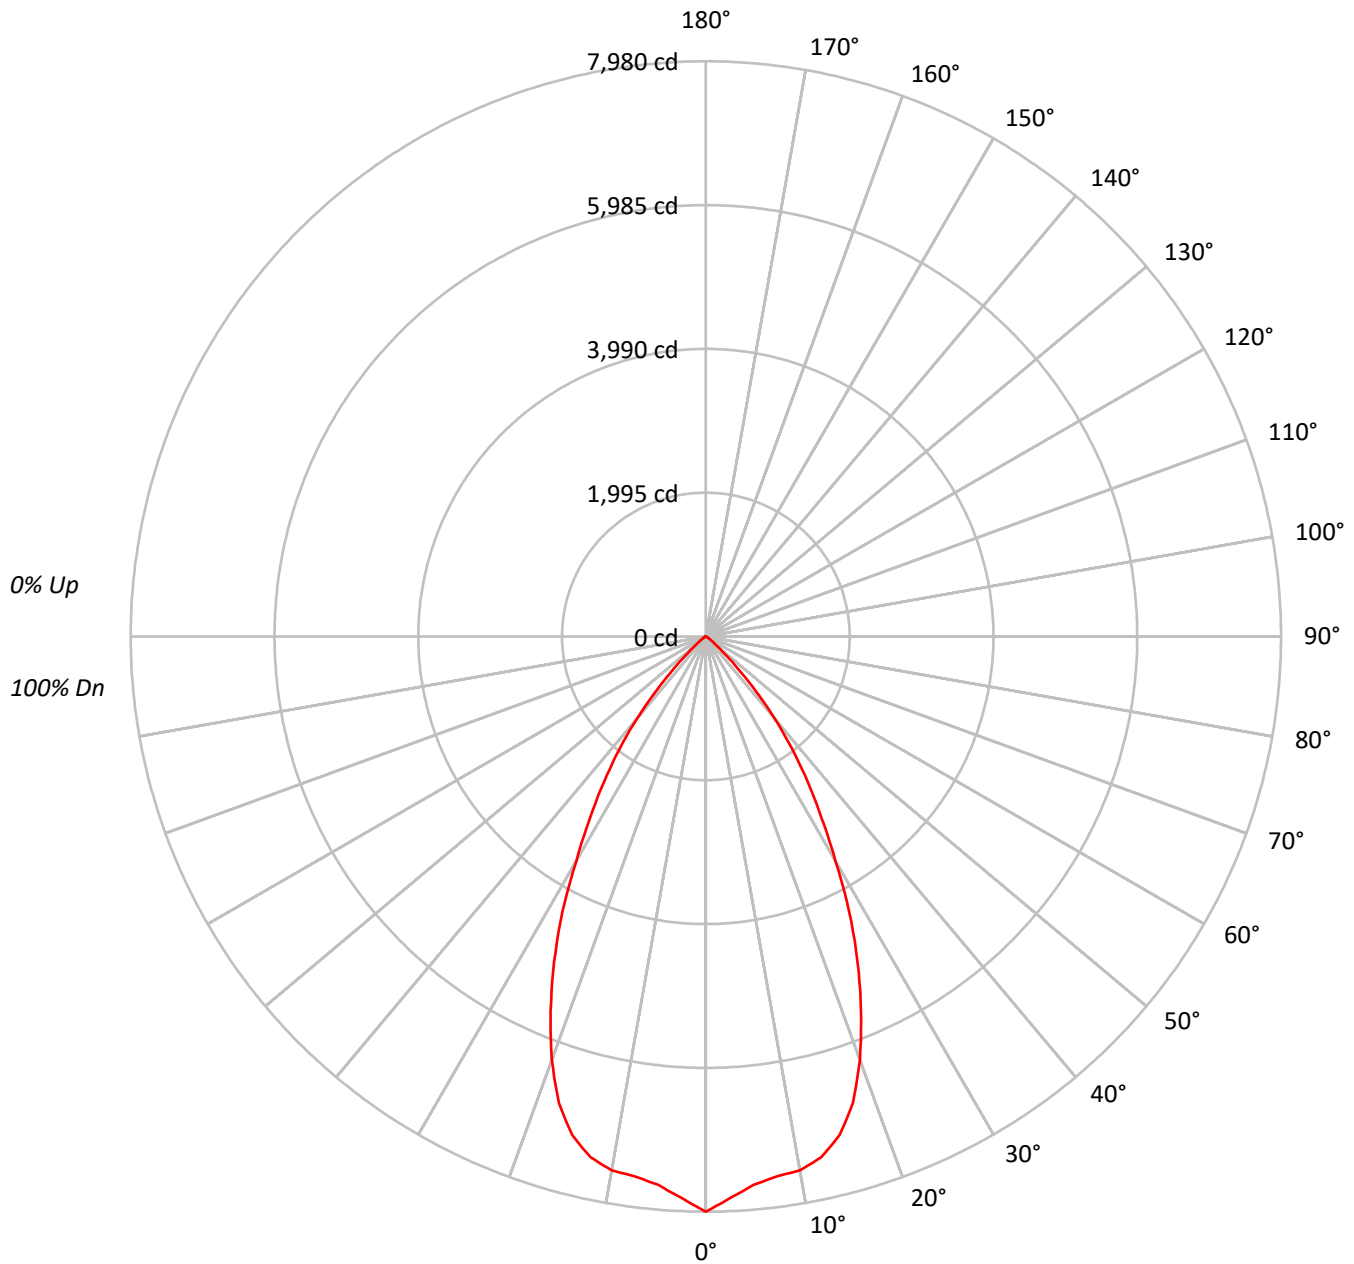



TEST NUMBER: P753398

CATALOG NUMBER: LD4D75BD010-EU4DR5570959027-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	95		98	95	92		95	93	90		92	90	89
3	102	96	91	87		100	95	90	86		92	88	85		90	86	84		87	85	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	92	84	78	74		91	83	77	73		81	76	73		79	75	72		78	74	71
6	88	79	73	68		86	78	72	68		76	71	68		75	70	67		74	70	67
7	83	74	68	64		82	73	67	63		72	67	63		71	66	63		70	65	62
8	79	69	63	59		78	69	63	59		68	63	59		67	62	59		66	62	58
9	75	66	60	56		74	65	59	55		64	59	55		63	58	55		62	58	55
10	72	62	56	52		71	61	56	52		61	56	52		60	55	52		59	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	871955
5°	837327
10°	834172
15°	810209
20°	726461
25°	600380
30°	453520
35°	328828
40°	210450
45°	96110
50°	31429
55°	13563
60°	5835
65°	776
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 96110 cd/sqm



TEST NUMBER: P753398

CATALOG NUMBER: LD4D75BD010-EU4DR5570959027-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	726.5	10.2
10°-20°	1982.6	27.9
20°-30°	2259.4	31.7
30°-40°	1538.1	21.6
40°-50°	530.0	7.4
50°-60°	73.3	1.0
60°-70°	7.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4968.5	69.8
0°-40°	6506.5	91.4
0°-60°	7109.8	99.9
0°-90°	7116.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7116.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7980	
5°	7634	726
15°	7163	1983
25°	4980	2259
35°	2465	1538
45°	622	530
55°	71	73
65°	3	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753398

CATALOG NUMBER: LD4D75BD010-EU4DR5570959027-4LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7980.5
2.5°	7797.5
5°	7634.4
7.5°	7554.3
10°	7518.7
12.5°	7400.0
15°	7162.7
17.5°	6785.9
20°	6247.9
22.5°	5626.9
25°	4980.1
27.5°	4306.7
30°	3594.7
32.5°	2991.4
35°	2465.3
37.5°	1965.0
40°	1475.5
42.5°	1022.5
45°	622.0
47.5°	335.2
50°	184.9
52.5°	109.8
55°	71.2
57.5°	45.5
60°	26.7
62.5°	11.9
65°	3.0
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)