

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753483

Luminaire Tested: LD4D75BD010-EU4DR6070959030-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P753483
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR6070959030-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7189.4 lumens
Efficiency: N/A
Efficacy: 99.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P753483

CATALOG NUMBER: LD4D75BD010-EU4DR6070959030-4LBDP1H

Luminous Intensity Polar Plot

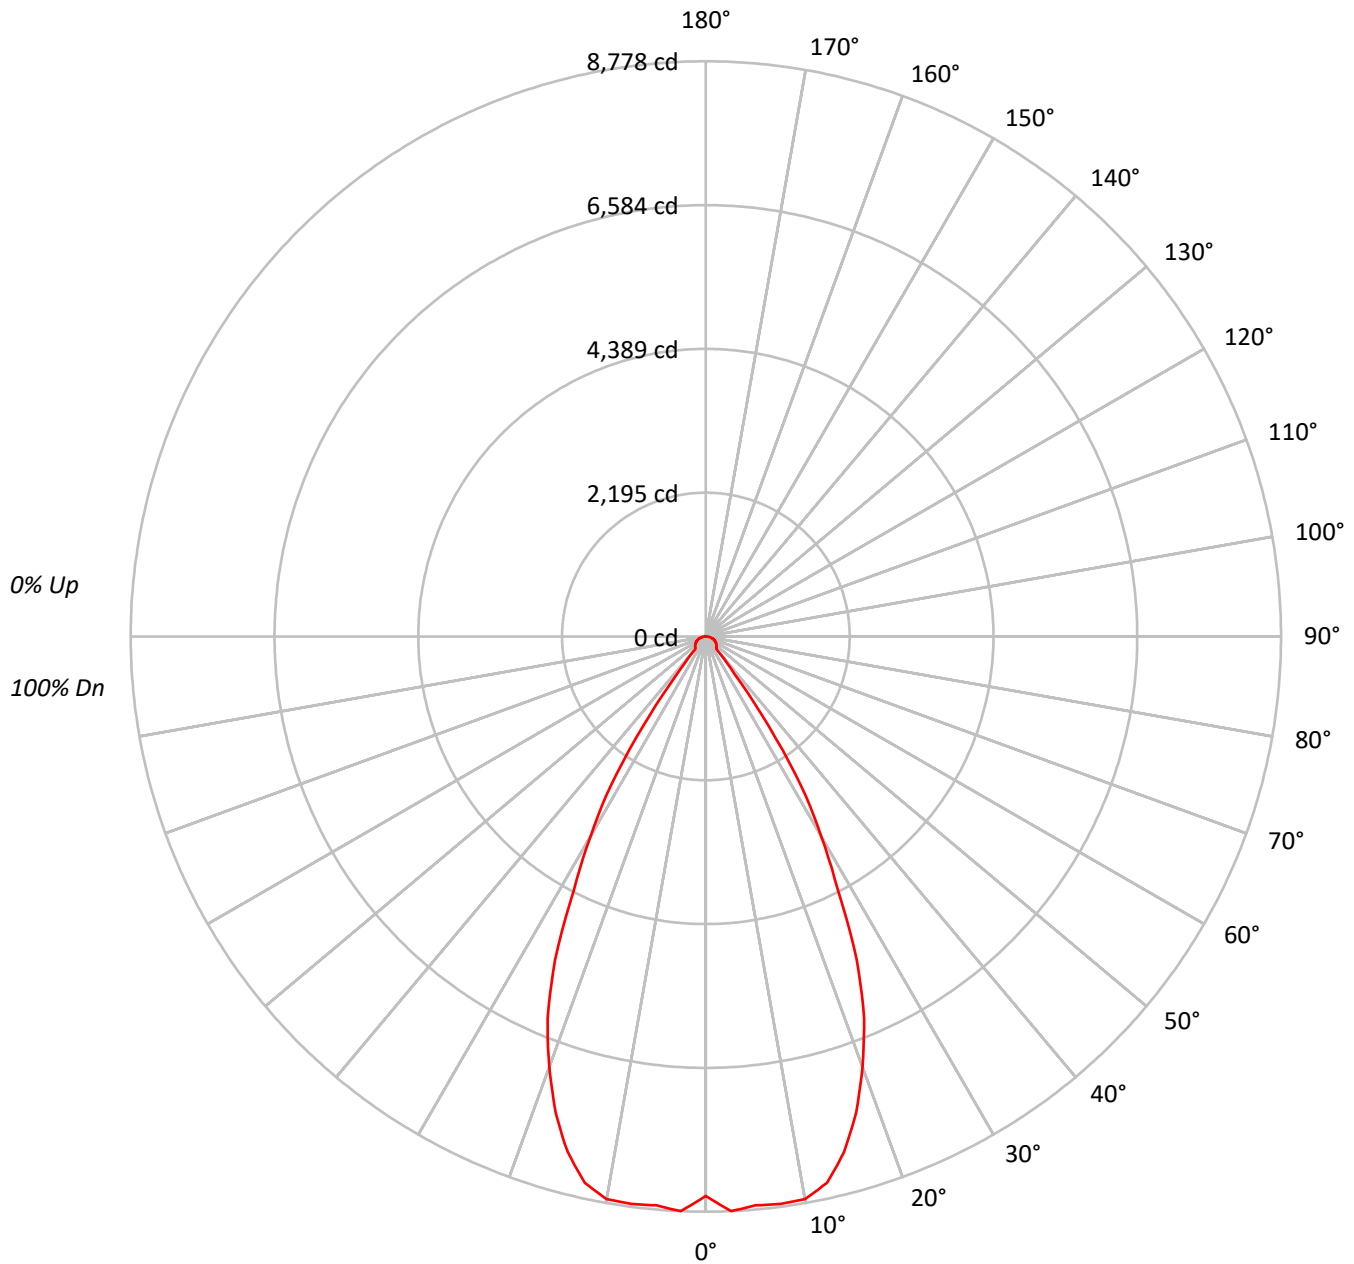



TEST NUMBER: P753483

CATALOG NUMBER: LD4D75BD010-EU4DR6070959030-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	96	90	86	100	94	89	86	91	88	84		89	86	83		87
4	97	89	84	80	95	88	83	79	86	82	78		84	80	77		82
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78
6	88	79	73	69	87	78	73	69	77	72	68		75	71	68		74
7	84	75	69	65	83	74	68	64	73	68	64		72	67	64		71
8	80	71	65	61	79	70	65	61	69	64	60		68	64	60		67
9	77	67	61	57	75	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	932912
5°	955845
10°	967396
15°	921571
20°	812550
25°	657211
30°	444550
35°	222763
40°	36142
45°	35369
50°	36070
55°	36612
60°	37629
65°	38496
70°	39389
75°	39893
80°	38445
85°	32093

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 39893 cd/sqm



TEST NUMBER: P753483

CATALOG NUMBER: LD4D75BD010-EU4DR6070959030-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	832.9	11.6
10°-20°	2253.6	31.3
20°-30°	2424.7	33.7
30°-40°	1053.9	14.7
40°-50°	177.0	2.5
50°-60°	172.1	2.4
60°-70°	147.2	2.0
70°-80°	98.5	1.4
80°-90°	29.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5511.2	76.7
0°-40°	6565.1	91.3
0°-60°	6914.2	96.2
0°-90°	7189.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7189.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8538	
5°	8715	833
15°	8147	2254
25°	5452	2425
35°	1670	1054
45°	229	177
55°	192	172
65°	149	147
75°	94	99
85°	26	29
90°	0	



TEST NUMBER: P753483

CATALOG NUMBER: LD4D75BD010-EU4DR6070959030-4LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	8538.4
2.5°	8778.4
5°	8715.0
7.5°	8735.0
10°	8719.5
12.5°	8539.5
15°	8147.2
17.5°	7620.5
20°	6988.3
22.5°	6311.5
25°	5451.5
27.5°	4360.3
30°	3523.6
32.5°	2715.7
35°	1670.1
37.5°	714.5
40°	253.4
42.5°	233.3
45°	228.9
47.5°	221.1
50°	212.2
52.5°	202.2
55°	192.2
57.5°	182.2
60°	172.2
62.5°	161.1
65°	148.9
67.5°	136.7
70°	123.3
72.5°	108.9
75°	94.5
77.5°	77.8
80°	61.1
82.5°	43.3
85°	25.6
87.5°	8.9
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)