

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753027

Luminaire Tested: LD4D75BD010-EU4DR3070959035-4LBDP1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P753027  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D75BD010-EU4DR3070959035-4LBDP1B  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5695.7 lumens  
Efficiency: N/A  
Efficacy: 78.7 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P753027  
CATALOG NUMBER: LD4D75BD010-EU4DR3070959035-4LBDP1B

### Luminous Intensity Polar Plot

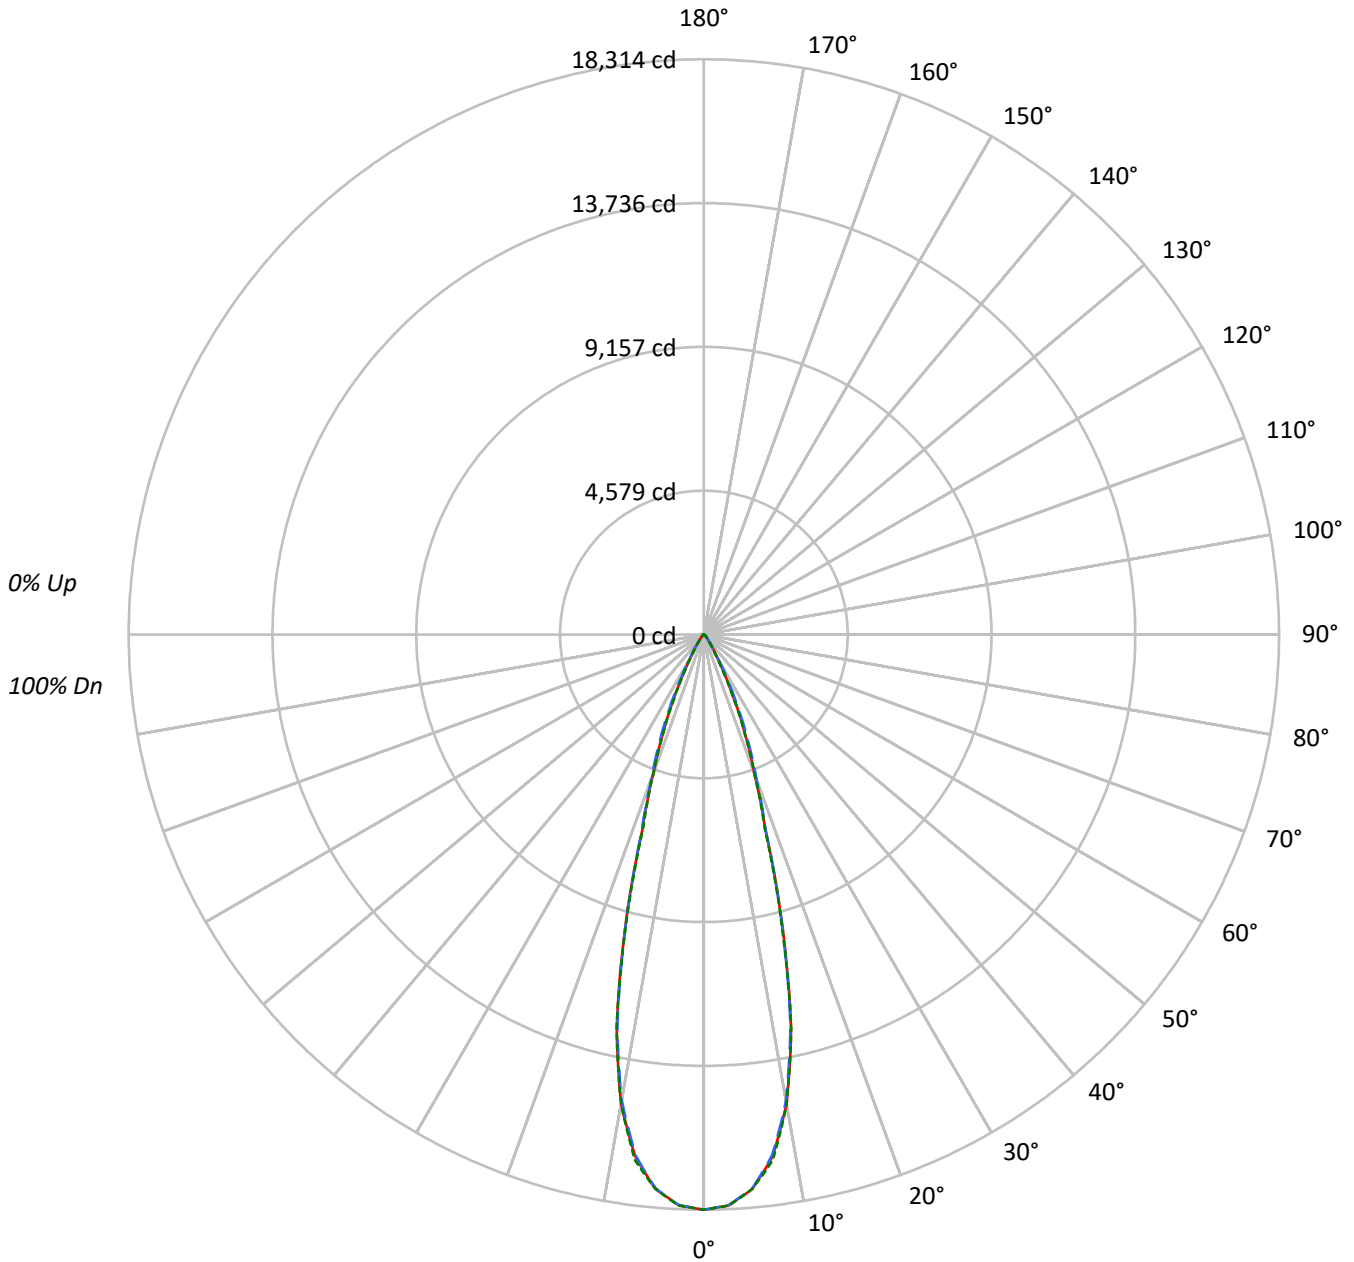



TEST NUMBER: P753027

CATALOG NUMBER: LD4D75BD010-EU4DR3070959035-4LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1401854	1401854	1401854
5°	1361607	1360016	1361676
10°	1179364	1171039	1179084
15°	769471	765342	761491
20°	382622	396983	382109
25°	192738	217348	188794
30°	77169	84080	67234
35°	35798	34284	28733
40°	15458	17156	14558
45°	10901	13531	10998
50°	3751	9848	3965
55°	2162	4084	2282
60°	1516	1791	1516
65°	978	978	978
70°	604	403	604
75°	0	266	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 13531 cd/sqm



TEST NUMBER: P753027

CATALOG NUMBER: LD4D75BD010-EU4DR3070959035-4LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1610.5	28.3
10°-20°	2593.7	45.5
20°-30°	1120.8	19.7
30°-40°	255.5	4.5
40°-50°	87.7	1.5
50°-60°	21.4	0.4
60°-70°	5.6	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5325.0	93.5
0°-40°	5580.4	98.0
0°-60°	5689.6	99.9
0°-90°	5695.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5695.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	18314	18314	18314	18314	18314	
5°	17721	17704	17700	17737	17722	1612
15°	9710	9593	9658	9627	9610	2600
25°	2282	2368	2574	2308	2235	1092
35°	383	391	367	364	308	260
45°	101	125	125	125	102	71
55°	16	17	31	18	17	16
65°	5	5	5	5	5	5
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P753027

CATALOG NUMBER: LD4D75BD010-EU4DR3070959035-4LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	18314.5	18314.5	18314.5	18314.5	18314.5
2.5°	18193.1	18180.5	18187.7	18196.7	18200.3
5°	17721.0	17703.9	17700.3	17737.2	17721.9
7.5°	16768.8	16744.5	16707.7	16791.3	16869.5
10°	15173.7	15146.7	15066.6	15106.2	15170.1
12.5°	12818.7	12731.5	12729.7	12855.6	12838.5
15°	9710.2	9593.3	9658.1	9626.6	9609.5
17.5°	6529.8	6484.9	6571.2	6545.1	6432.7
20°	4697.3	4709.0	4873.6	4790.8	4691.0
22.5°	3427.7	3469.9	3665.1	3451.9	3373.7
25°	2282.1	2368.4	2573.5	2308.2	2235.4
27.5°	1403.6	1443.2	1650.9	1385.6	1346.1
30°	873.1	853.3	951.3	816.5	760.7
32.5°	572.8	547.6	579.1	519.7	474.8
35°	383.1	391.1	366.9	364.2	307.5
37.5°	239.2	275.1	242.8	259.0	197.8
40°	154.7	199.6	171.7	189.7	145.7
42.5°	126.8	153.8	141.2	150.2	129.5
45°	100.7	125.0	125.0	125.0	101.6
47.5°	55.7	83.6	107.0	85.4	59.3
50°	31.5	42.3	82.7	44.1	33.3
52.5°	21.6	24.3	56.6	25.2	22.5
55°	16.2	17.1	30.6	18.0	17.1
57.5°	12.6	13.5	16.2	13.5	12.6
60°	9.9	9.9	11.7	10.8	9.9
62.5°	7.2	7.2	8.1	7.2	7.2
65°	5.4	5.4	5.4	5.4	5.4
67.5°	2.7	3.6	3.6	3.6	3.6
70°	2.7	1.8	1.8	1.8	2.7
72.5°	1.8	0.9	0.9	0.9	0.9
75°	0.0	0.0	0.9	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)