

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753498

Luminaire Tested: LD4D75BD010-EU4DR6070959035-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P753498
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR6070959035-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6579.4 lumens
Efficiency: N/A
Efficacy: 90.9 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P753498

CATALOG NUMBER: LD4D75BD010-EU4DR6070959035-4LBDP1MW

Luminous Intensity Polar Plot

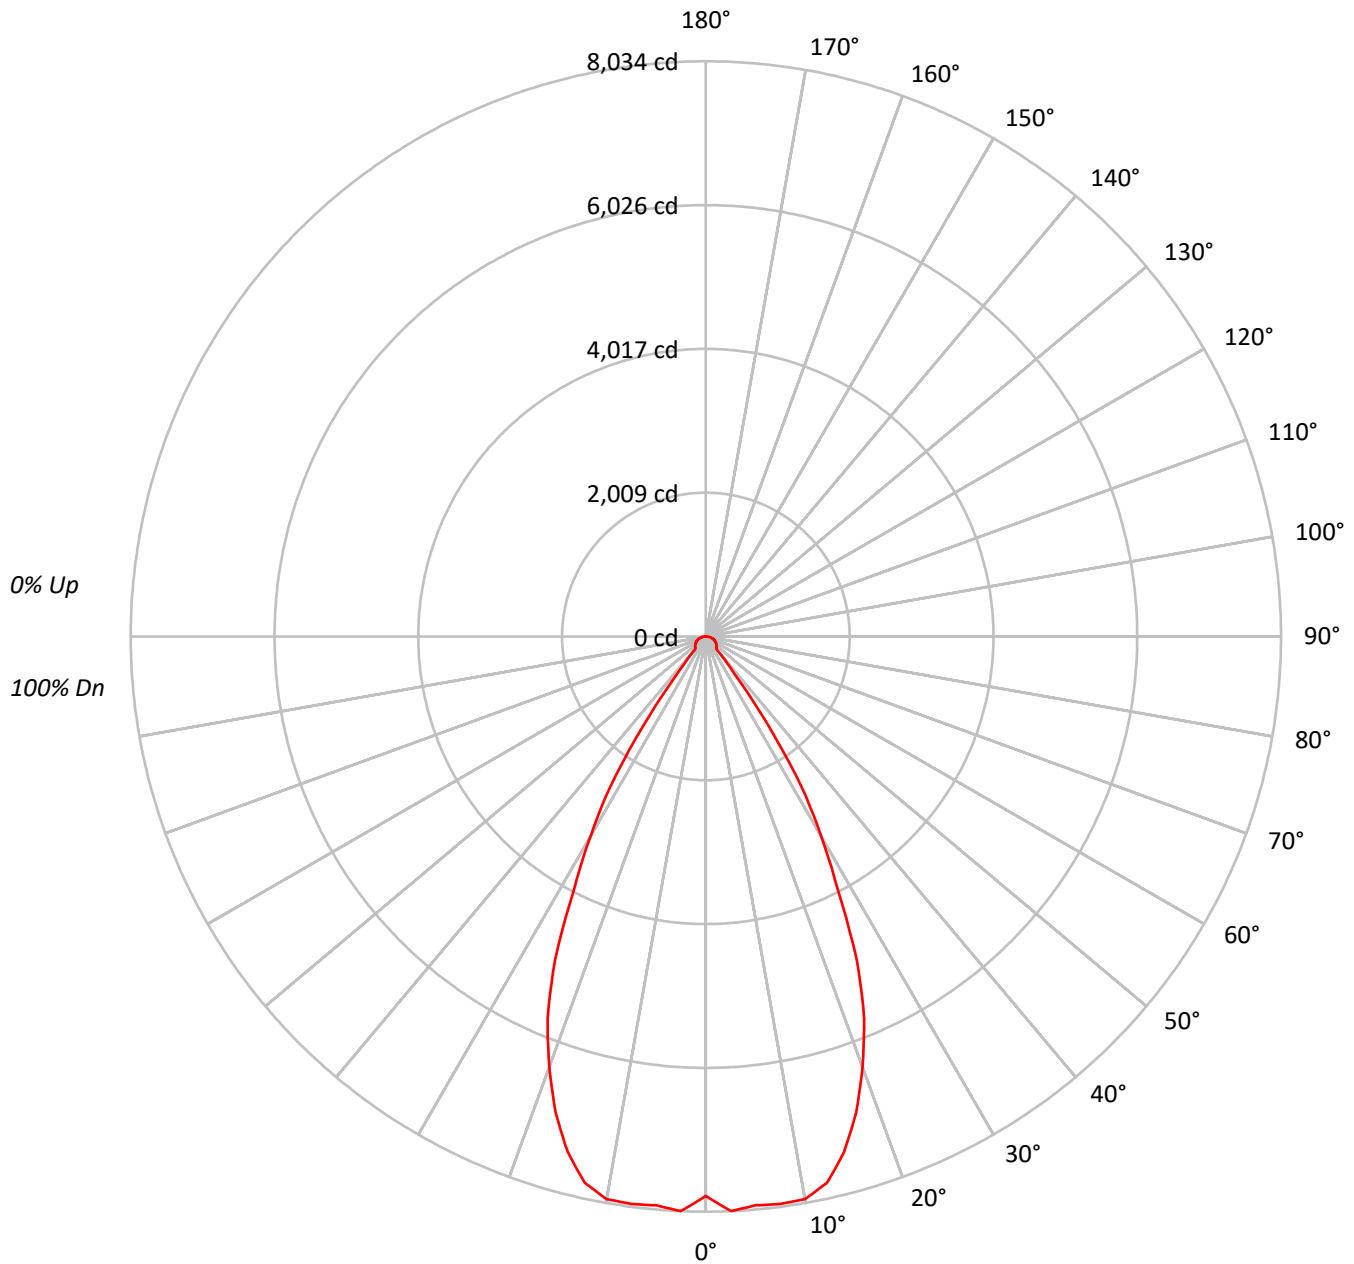



TEST NUMBER: P753498

CATALOG NUMBER: LD4D75BD010-EU4DR6070959035-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86		
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70		
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66		
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62		
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59		
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	853753
5°	874749
10°	885307
15°	843375
20°	743600
25°	601441
30°	406827
35°	203862
40°	33076
45°	32372
50°	33010
55°	33507
60°	34439
65°	35238
70°	36067
75°	36474
80°	35173
85°	29335

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 36474 cd/sqm



TEST NUMBER: P753498

CATALOG NUMBER: LD4D75BD010-EU4DR6070959035-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	762.3	11.6
10°-20°	2062.3	31.3
20°-30°	2218.9	33.7
30°-40°	964.5	14.7
40°-50°	162.0	2.5
50°-60°	157.5	2.4
60°-70°	134.8	2.0
70°-80°	90.2	1.4
80°-90°	27.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5043.5	76.7
0°-40°	6008.1	91.3
0°-60°	6327.6	96.2
0°-90°	6579.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6579.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7814	
5°	7976	762
15°	7456	2062
25°	4989	2219
35°	1528	965
45°	210	162
55°	176	158
65°	136	135
75°	86	90
85°	23	27
90°	0	



TEST NUMBER: P753498

CATALOG NUMBER: LD4D75BD010-EU4DR6070959035-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7813.9
2.5°	8033.5
5°	7975.6
7.5°	7993.9
10°	7979.6
12.5°	7814.9
15°	7455.9
17.5°	6973.9
20°	6395.3
22.5°	5776.0
25°	4988.9
27.5°	3990.3
30°	3224.6
32.5°	2485.3
35°	1528.4
37.5°	653.9
40°	231.9
42.5°	213.5
45°	209.5
47.5°	202.4
50°	194.2
52.5°	185.1
55°	175.9
57.5°	166.8
60°	157.6
62.5°	147.5
65°	136.3
67.5°	125.1
70°	112.9
72.5°	99.7
75°	86.4
77.5°	71.2
80°	55.9
82.5°	39.7
85°	23.4
87.5°	8.1
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)