

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753574

Luminaire Tested: LD4D75BD010-EU4DR6570959035-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P753574
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR6570959035-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6348.1 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P753574
CATALOG NUMBER: LD4D75BD010-EU4DR6570959035-4LBDP1H

Luminous Intensity Polar Plot

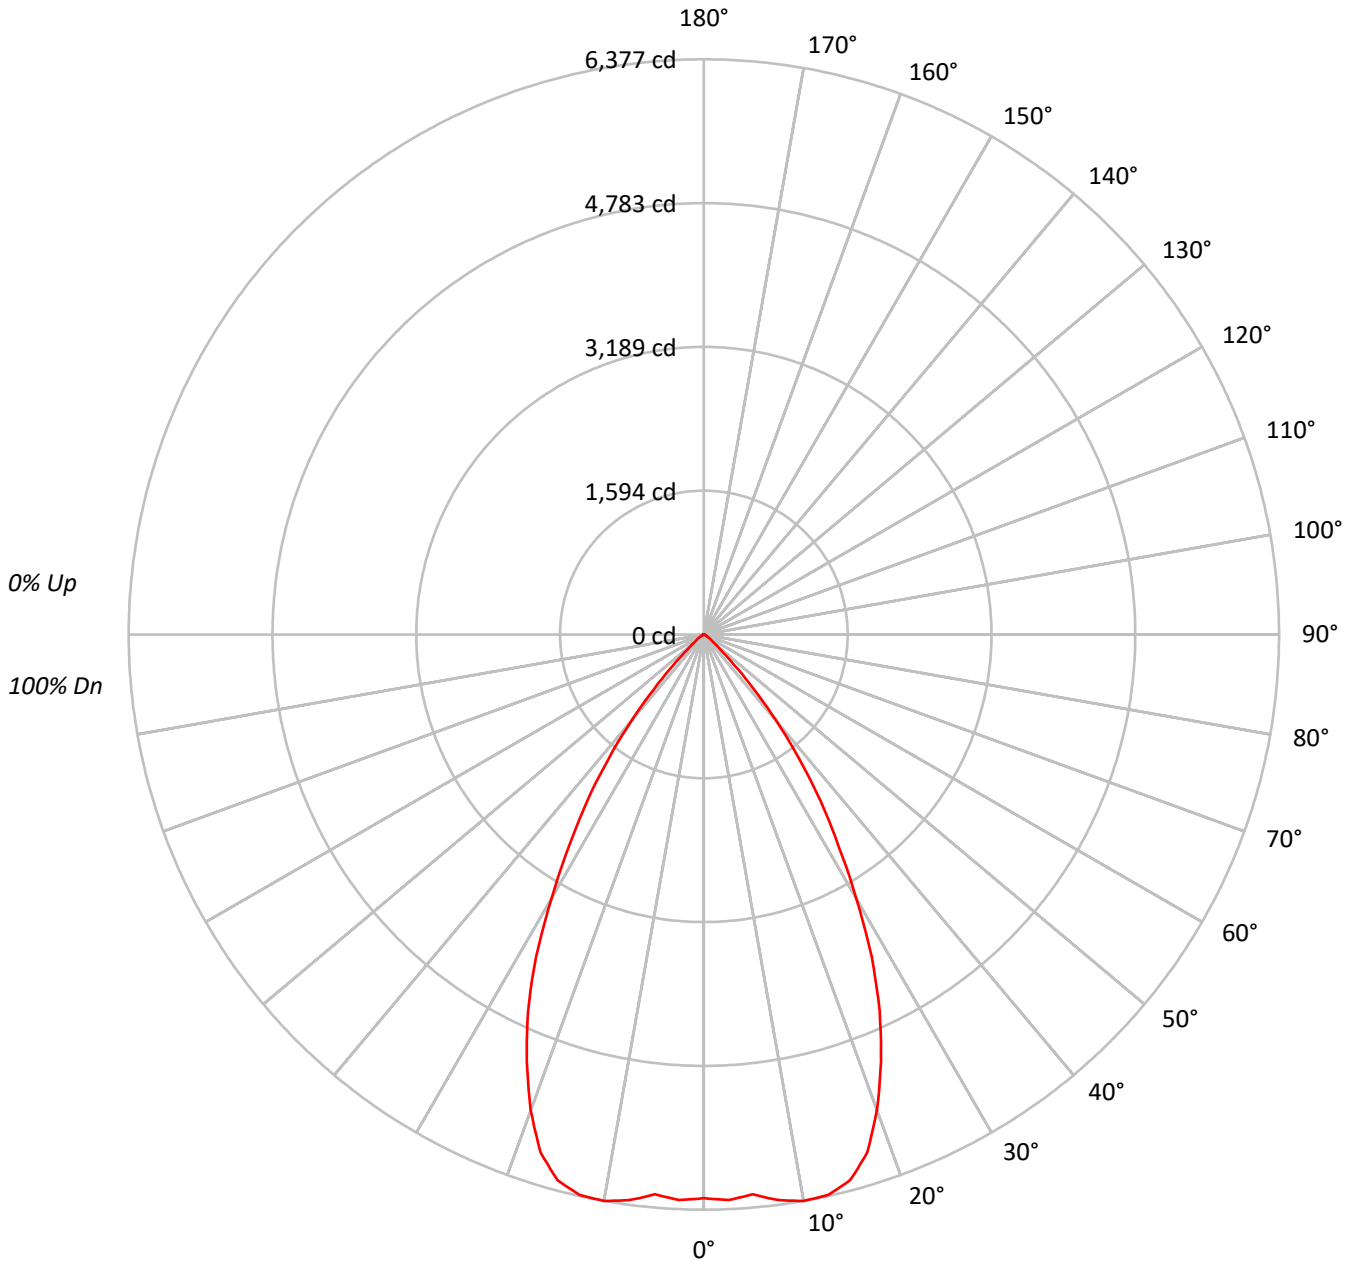



TEST NUMBER: P753574

CATALOG NUMBER: LD4D75BD010-EU4DR6570959035-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	682891
5°	683459
10°	707516
15°	708688
20°	652465
25°	555931
30°	425587
35°	300671
40°	177474
45°	72052
50°	26126
55°	14553
60°	8348
65°	4602
70°	4824
75°	3757
80°	3901
85°	3385

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 72052 cd/sqm



TEST NUMBER: P753574

CATALOG NUMBER: LD4D75BD010-EU4DR6570959035-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	601.8	9.5
10°-20°	1736.0	27.3
20°-30°	2082.9	32.8
30°-40°	1399.8	22.0
40°-50°	419.0	6.6
50°-60°	74.0	1.2
60°-70°	21.0	0.3
70°-80°	10.3	0.2
80°-90°	3.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4420.7	69.6
0°-40°	5820.5	91.7
0°-60°	6313.5	99.5
0°-90°	6348.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6348.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6250	
5°	6232	602
15°	6265	1736
25°	4611	2083
35°	2254	1400
45°	466	419
55°	76	74
65°	18	21
75°	9	10
85°	3	3
90°	0	



TEST NUMBER: P753574

CATALOG NUMBER: LD4D75BD010-EU4DR6570959035-4LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	6250.1
2.5°	6276.8
5°	6231.5
7.5°	6325.6
10°	6377.1
12.5°	6364.7
15°	6265.2
17.5°	6021.9
20°	5611.5
22.5°	5128.4
25°	4611.4
27.5°	4027.9
30°	3373.3
32.5°	2780.0
35°	2254.2
37.5°	1734.6
40°	1244.3
42.5°	812.7
45°	466.3
47.5°	246.9
50°	153.7
52.5°	106.6
55°	76.4
57.5°	55.1
60°	38.2
62.5°	24.9
65°	17.8
67.5°	16.0
70°	15.1
72.5°	11.5
75°	8.9
77.5°	8.0
80°	6.2
82.5°	4.4
85°	2.7
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)