

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741093

Luminaire Tested: LD4D08D010-EU4DR300210IC9024-4LBS1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P741093
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR300210IC9024-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 637.2 lumens
Efficiency: N/A
Efficacy: 71.6 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741093
CATALOG NUMBER: LD4D08D010-EU4DR300210IC9024-4LBS1MW

Luminous Intensity Polar Plot

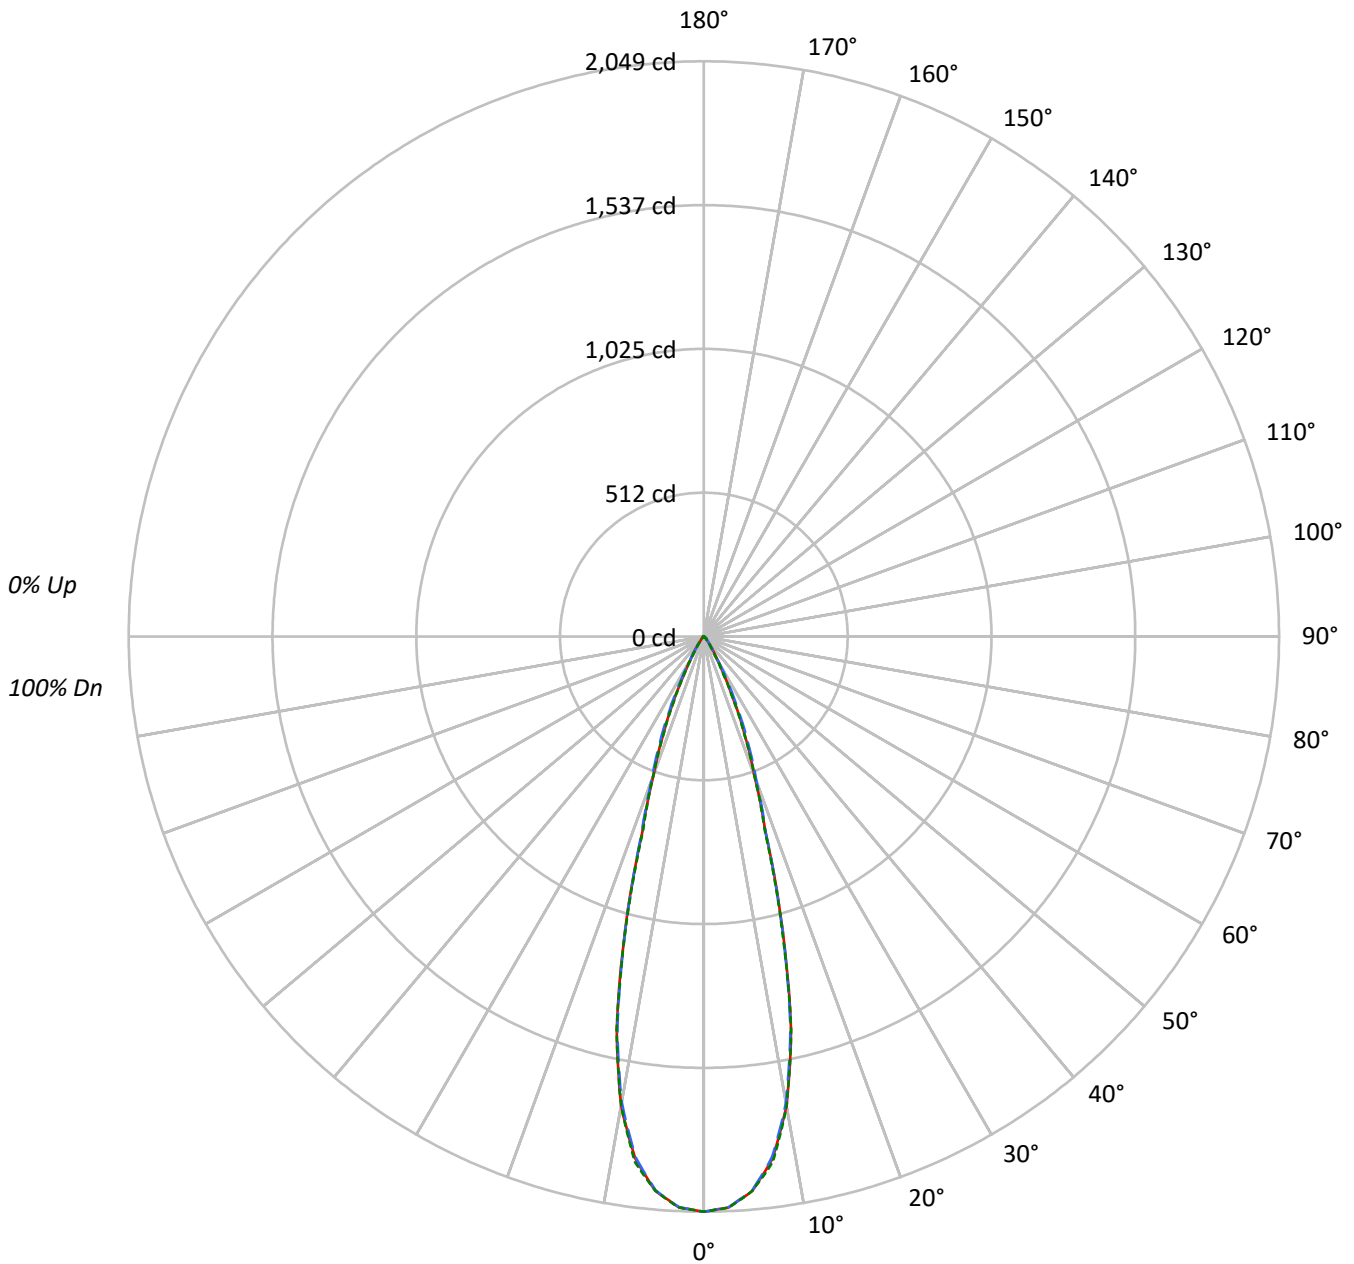



TEST NUMBER: P741093

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9024-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	156837	156837	156837
5°	152335	152158	152350
10°	131952	131020	131921
15°	86090	85623	85195
20°	42805	44418	42748
25°	21562	24315	21123
30°	8635	9413	7522
35°	4009	3831	3214
40°	1729	1918	1629
45°	1223	1515	1223
50°	417	1107	441
55°	240	454	254
60°	168	199	168
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1515 cd/sqm



TEST NUMBER: P741093

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9024-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.2	28.3
10°-20°	290.2	45.5
20°-30°	125.4	19.7
30°-40°	28.6	4.5
40°-50°	9.8	1.5
50°-60°	2.4	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	595.8	93.5
0°-40°	624.3	98.0
0°-60°	636.6	99.9
0°-90°	637.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	637.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2049	2049	2049	2049	2049	
5°	1983	1981	1980	1984	1983	180
15°	1086	1073	1080	1077	1075	291
25°	255	265	288	258	250	122
35°	43	44	41	41	34	29
45°	11	14	14	14	11	8
55°	2	2	3	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P741093

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9024-4LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2049.0	2049.0	2049.0	2049.0	2049.0
2.5°	2035.5	2034.0	2034.8	2035.9	2036.3
5°	1982.6	1980.7	1980.3	1984.4	1982.8
7.5°	1876.1	1873.4	1869.3	1878.6	1887.4
10°	1697.7	1694.6	1685.7	1690.1	1697.3
12.5°	1434.2	1424.4	1424.2	1438.3	1436.4
15°	1086.4	1073.3	1080.5	1077.0	1075.1
17.5°	730.6	725.5	735.2	732.3	719.7
20°	525.5	526.8	545.3	536.0	524.8
22.5°	383.5	388.2	410.1	386.2	377.5
25°	255.3	265.0	287.9	258.2	250.1
27.5°	157.0	161.5	184.7	155.0	150.6
30°	97.7	95.5	106.5	91.3	85.1
32.5°	64.1	61.2	64.8	58.2	53.1
35°	42.9	43.8	41.0	40.7	34.4
37.5°	26.8	30.8	27.2	29.0	22.1
40°	17.3	22.3	19.2	21.2	16.3
42.5°	14.2	17.2	15.8	16.8	14.5
45°	11.3	14.0	14.0	14.0	11.3
47.5°	6.2	9.3	12.0	9.6	6.6
50°	3.5	4.8	9.3	4.9	3.7
52.5°	2.4	2.7	6.4	2.8	2.5
55°	1.8	1.9	3.4	2.0	1.9
57.5°	1.4	1.5	1.8	1.5	1.4
60°	1.1	1.1	1.3	1.2	1.1
62.5°	0.8	0.8	0.9	0.8	0.8
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)