

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741633

Luminaire Tested: LD4D08D010-EU4DR650210IC9024-4LBDP1H

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741633  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR650210IC9024-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 571.5 lumens  
Efficiency: N/A  
Efficacy: 64.2 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741633

CATALOG NUMBER: LD4D08D010-EU4DR650210IC9024-4LBDP1H

### Luminous Intensity Polar Plot

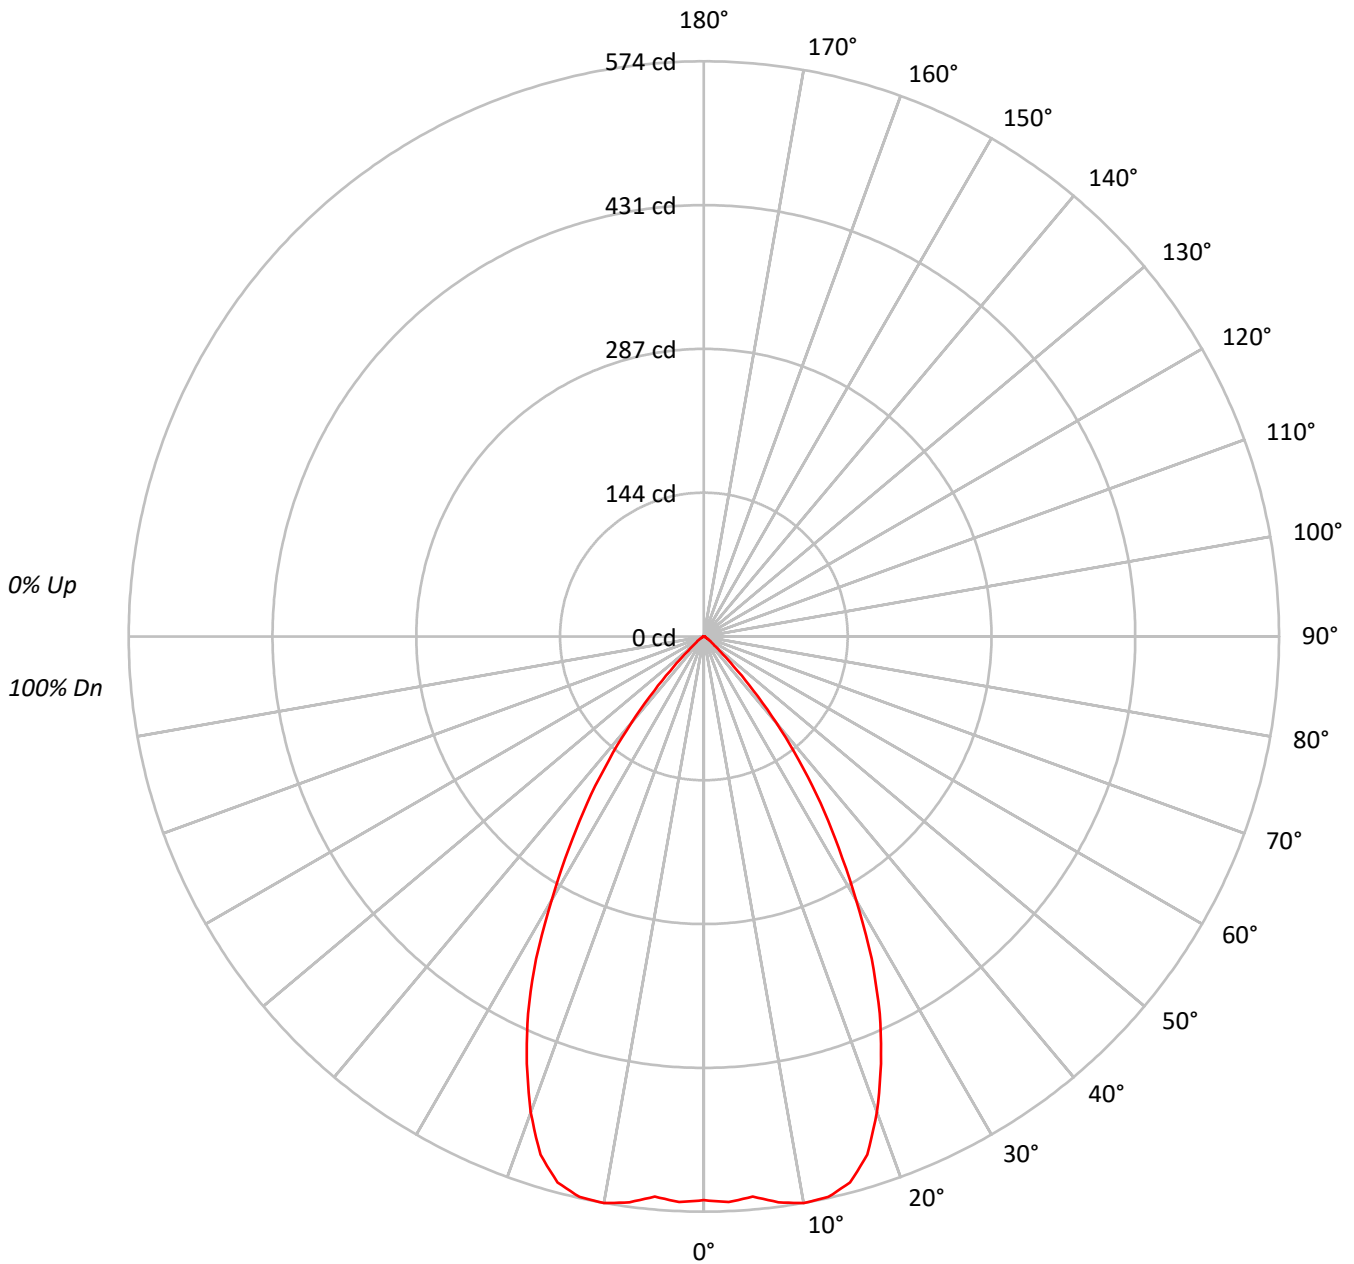



TEST NUMBER: P741633

CATALOG NUMBER: LD4D08D010-EU4DR650210IC9024-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	61470
5°	61529
10°	63694
15°	63797
20°	58741
25°	50043
30°	38316
35°	27063
40°	15975
45°	6490
50°	2346
55°	1314
60°	743
65°	414
70°	447
75°	338
80°	378
85°	251

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6490 cd/sqm



TEST NUMBER: P741633

CATALOG NUMBER: LD4D08D010-EU4DR650210IC9024-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	54.2	9.5
10°-20°	156.3	27.3
20°-30°	187.5	32.8
30°-40°	126.0	22.0
40°-50°	37.7	6.6
50°-60°	6.7	1.2
60°-70°	1.9	0.3
70°-80°	0.9	0.2
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	398.0	69.6
0°-40°	524.0	91.7
0°-60°	568.4	99.5
0°-90°	571.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	571.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	563	
5°	561	54
15°	564	156
25°	415	188
35°	203	126
45°	42	38
55°	7	7
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P741633

CATALOG NUMBER: LD4D08D010-EU4DR650210IC9024-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	562.6
2.5°	565.0
5°	561.0
7.5°	569.5
10°	574.1
12.5°	573.0
15°	564.0
17.5°	542.1
20°	505.2
22.5°	461.7
25°	415.1
27.5°	362.6
30°	303.7
32.5°	250.3
35°	202.9
37.5°	156.1
40°	112.0
42.5°	73.2
45°	42.0
47.5°	22.2
50°	13.8
52.5°	9.6
55°	6.9
57.5°	5.0
60°	3.4
62.5°	2.2
65°	1.6
67.5°	1.4
70°	1.4
72.5°	1.0
75°	0.8
77.5°	0.7
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)