

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740865

Luminaire Tested: LD4D08D010-EU4DR150210IC9027-4LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P740865
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR150210IC9027-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 683.3 lumens
Efficiency: N/A
Efficacy: 76.8 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740865

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9027-4LBDP1B

Luminous Intensity Polar Plot

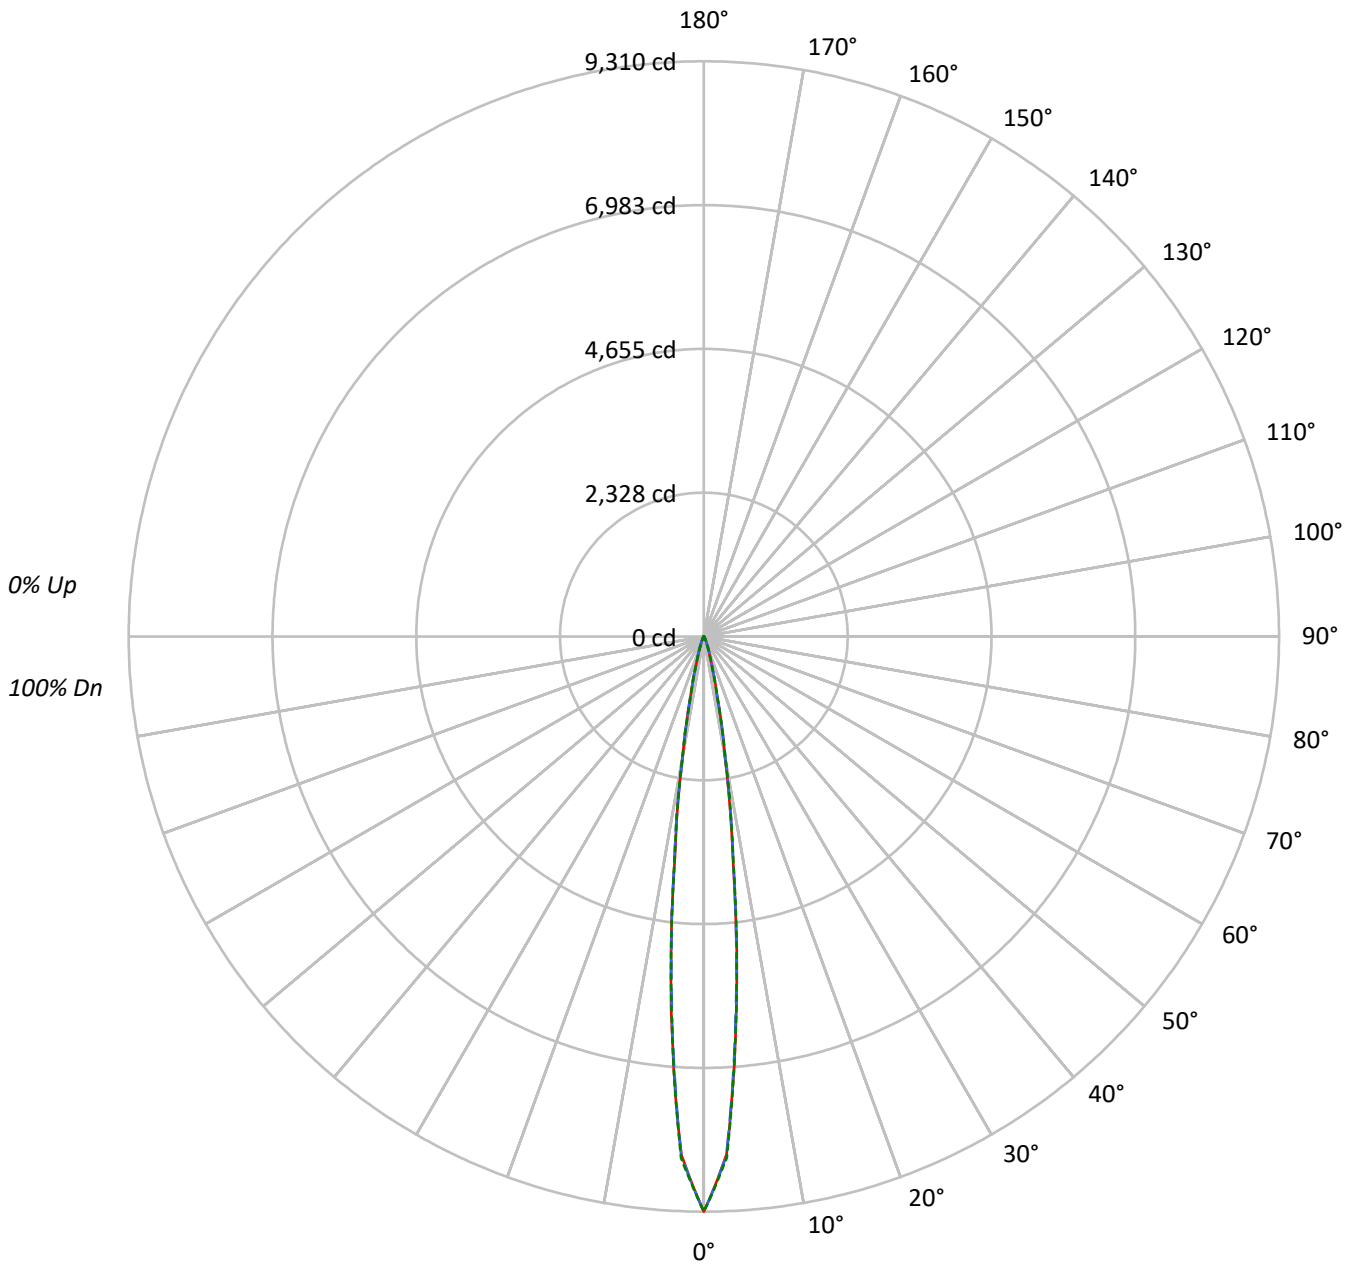



TEST NUMBER: P740865

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9027-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1047516	1047516	1047516
5°	615576	607599	612406
10°	183723	185010	187838
15°	45695	46590	45148
20°	13673	15833	13959
25°	4822	6139	4884
30°	1767	2329	1797
35°	886	1002	857
40°	561	618	561
45°	413	441	413
50°	327	327	327
55°	271	271	271
60°	225	225	225
65°	171	171	171
70°	146	146	146
75°	91	91	121
80°	63	63	63
85°	33	33	33

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 441 cd/sqm



TEST NUMBER: P740865

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9027-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	443.2	64.9
10°-20°	182.3	26.7
20°-30°	36.2	5.3
30°-40°	9.0	1.3
40°-50°	4.7	0.7
50°-60°	3.5	0.5
60°-70°	2.5	0.4
70°-80°	1.4	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	661.6	96.8
0°-40°	670.7	98.2
0°-60°	678.9	99.4
0°-90°	683.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	683.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	9310	9310	9310	9310	9310	
5°	6057	5995	5979	6020	6026	442
15°	526	536	536	527	520	180
25°	62	70	79	70	63	33
35°	12	13	14	13	12	8
45°	6	6	6	6	6	5
55°	4	4	4	4	4	3
65°	2	2	2	2	2	3
75°	1	1	1	1	2	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740865

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9027-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	9309.6	9309.6	9309.6	9309.6	9309.6
2.5°	8397.7	8404.8	8407.5	8415.8	8446.5
5°	6057.1	5994.8	5978.6	6020.0	6025.9
7.5°	3588.0	3600.6	3646.7	3656.9	3619.9
10°	1969.0	1985.1	1982.8	1996.9	2013.1
12.5°	1006.9	994.3	990.4	1006.6	984.1
15°	526.1	536.0	536.4	526.9	519.8
17.5°	283.0	294.4	313.3	297.9	274.3
20°	167.1	177.3	193.5	180.9	170.6
22.5°	103.3	111.5	123.0	113.1	104.8
25°	61.9	70.2	78.8	69.8	62.7
27.5°	36.7	43.7	49.3	43.4	36.3
30°	23.6	27.6	31.1	27.2	24.0
32.5°	16.6	18.1	19.7	18.1	16.6
35°	12.2	13.0	13.8	13.0	11.8
37.5°	9.5	10.2	10.6	9.9	9.1
40°	7.9	8.3	8.7	8.3	7.9
42.5°	6.7	7.1	7.1	7.1	6.7
45°	5.9	5.9	6.3	5.9	5.9
47.5°	5.1	5.1	5.5	5.1	5.1
50°	4.7	4.7	4.7	4.7	4.7
52.5°	4.3	4.3	4.3	4.3	4.3
55°	3.9	3.9	3.9	3.9	3.9
57.5°	3.5	3.5	3.5	3.5	3.5
60°	3.2	3.2	3.2	3.2	3.2
62.5°	2.8	2.8	2.8	2.8	2.8
65°	2.4	2.4	2.4	2.4	2.4
67.5°	2.4	2.4	2.4	2.4	2.4
70°	2.0	2.0	2.0	2.0	2.0
72.5°	1.6	1.6	1.6	1.6	1.6
75°	1.2	1.2	1.2	1.2	1.6
77.5°	1.2	1.2	1.2	1.2	1.2
80°	0.8	0.8	0.8	0.8	0.8
82.5°	0.8	0.8	0.8	0.8	0.8
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)