

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740945

Luminaire Tested: LD4D08D010-EU4DR200210IC9027-4LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740945  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR200210IC9027-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 805.5 lumens  
Efficiency: N/A  
Efficacy: 90.5 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740945

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9027-4LBDP1LI

### Luminous Intensity Polar Plot

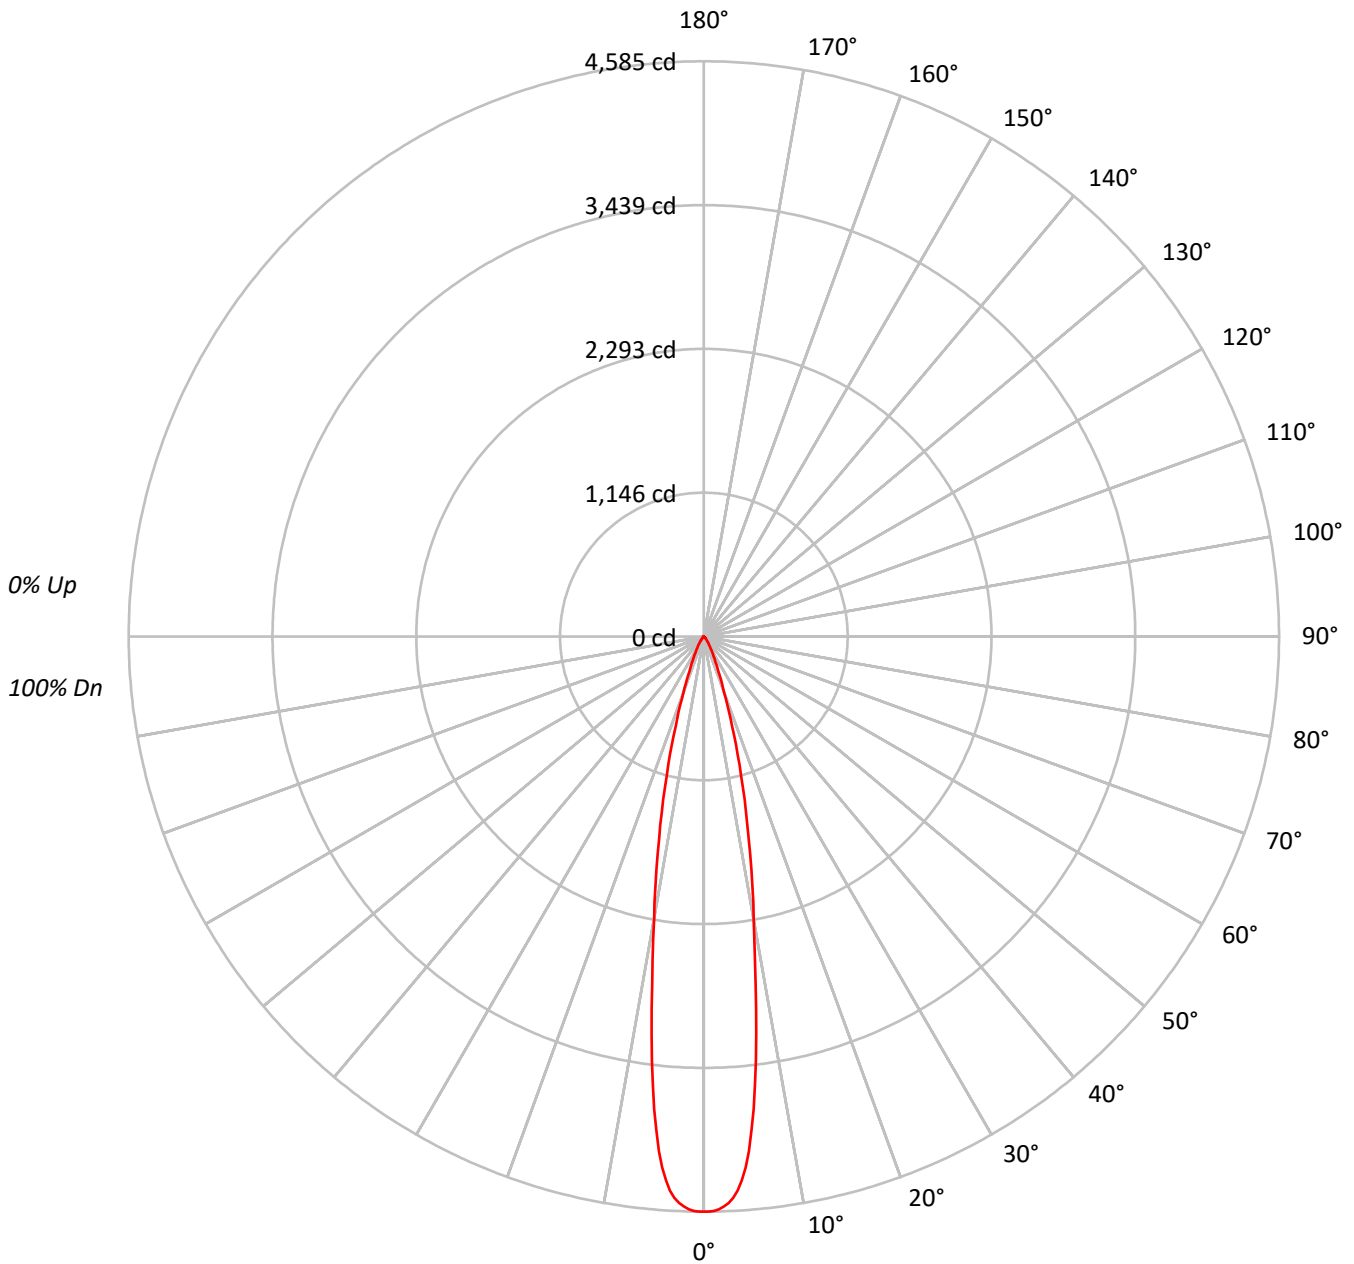



TEST NUMBER: P740945

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9027-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |    |     |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |    |     |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0  |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |    | 100 |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 115 | 113 | 111 | 109 | 113 | 111 | 109 | 108 | 107 | 106 | 104 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 97 | 98 | 98 | 97  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 111 | 108 | 105 | 102 | 109 | 106 | 104 | 101 | 103 | 101 | 99  | 100 | 99  | 97  | 98  | 96  | 95  | 94  | 94 | 98 | 96 | 95  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 108 | 103 | 100 | 97  | 106 | 102 | 99  | 96  | 100 | 97  | 95  | 97  | 95  | 93  | 95  | 93  | 92  | 91  | 91 | 95 | 93 | 92  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 105 | 99  | 96  | 93  | 103 | 98  | 95  | 92  | 96  | 93  | 91  | 95  | 92  | 90  | 93  | 91  | 89  | 88  | 88 | 93 | 91 | 89  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 102 | 96  | 92  | 89  | 100 | 95  | 91  | 89  | 94  | 90  | 88  | 92  | 89  | 87  | 91  | 88  | 86  | 85  | 85 | 91 | 88 | 86  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 99  | 93  | 89  | 86  | 98  | 92  | 88  | 86  | 91  | 87  | 85  | 90  | 87  | 84  | 88  | 86  | 84  | 83  | 83 | 88 | 86 | 84  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 96  | 90  | 86  | 83  | 95  | 89  | 86  | 83  | 88  | 85  | 82  | 87  | 84  | 82  | 86  | 84  | 82  | 81  | 81 | 86 | 84 | 82  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 94  | 87  | 83  | 81  | 93  | 87  | 83  | 80  | 86  | 83  | 80  | 85  | 82  | 80  | 84  | 82  | 80  | 79  | 79 | 84 | 82 | 80  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 91  | 85  | 81  | 78  | 91  | 85  | 81  | 78  | 84  | 80  | 78  | 83  | 80  | 78  | 82  | 80  | 78  | 77  | 77 | 82 | 80 | 78  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 89  | 83  | 79  | 76  | 88  | 82  | 79  | 76  | 82  | 78  | 76  | 81  | 78  | 76  | 81  | 78  | 76  | 75  | 75 | 81 | 78 | 76  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 500939 |
| 5°  | 451940 |
| 10° | 253656 |
| 15° | 128940 |
| 20° | 54590  |
| 25° | 25196  |
| 30° | 13335  |
| 35° | 7189   |
| 40° | 3837   |
| 45° | 2271   |
| 50° | 1326   |
| 55° | 705    |
| 60° | 437    |
| 65° | 310    |
| 70° | 128    |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2271 cd/sqm



TEST NUMBER: P740945

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9027-4LBDP1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 326.4  | 40.5      |
| 10°-20°   | 321.4  | 39.9      |
| 20°-30°   | 105.0  | 13.0      |
| 30°-40°   | 35.7   | 4.4       |
| 40°-50°   | 12.0   | 1.5       |
| 50°-60°   | 3.6    | 0.5       |
| 60°-70°   | 1.2    | 0.1       |
| 70°-80°   | 0.1    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 752.9  | 93.5      |
| 0°-40°    | 788.6  | 97.9      |
| 0°-60°    | 804.3  | 99.8      |
| 0°-90°    | 805.5  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 805.5  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 4585 |      |
| 5°  | 4121 | 326  |
| 15° | 1140 | 321  |
| 25° | 209  | 105  |
| 35° | 54   | 36   |
| 45° | 15   | 12   |
| 55° | 4    | 4    |
| 65° | 1    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P740945

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9027-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 4584.8 |
| 0.5°  | 4584.8 |
| 1°    | 4579.1 |
| 1.5°  | 4567.7 |
| 2°    | 4546.9 |
| 2.5°  | 4519.1 |
| 3°    | 4479.9 |
| 3.5°  | 4425.2 |
| 4°    | 4344.0 |
| 4.5°  | 4245.2 |
| 5°    | 4120.6 |
| 5.5°  | 3956.9 |
| 6°    | 3789.1 |
| 6.5°  | 3596.8 |
| 7°    | 3408.6 |
| 7.5°  | 3188.2 |
| 8°    | 2991.4 |
| 8.5°  | 2793.4 |
| 9°    | 2610.5 |
| 9.5°  | 2442.7 |
| 10°   | 2286.3 |
| 12.5° | 1641.6 |
| 15°   | 1139.9 |
| 17.5° | 744.7  |
| 20°   | 469.5  |
| 22.5° | 304.2  |
| 25°   | 209.0  |
| 27.5° | 147.0  |
| 30°   | 105.7  |
| 32.5° | 75.9   |
| 35°   | 53.9   |
| 37.5° | 37.6   |
| 40°   | 26.9   |
| 42.5° | 19.6   |
| 45°   | 14.7   |
| 47.5° | 11.4   |
| 50°   | 7.8    |
| 52.5° | 4.9    |
| 55°   | 3.7    |
| 57.5° | 2.9    |
| 60°   | 2.0    |
| 62.5° | 1.6    |
| 65°   | 1.2    |



TEST NUMBER: P740945

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9027-4LBDP1LI

**CANDELA DISTRIBUTION (continued):**

|       | 0°  |
|-------|-----|
| 72.5° | 0.0 |
| 75°   | 0.0 |
| 77.5° | 0.0 |
| 80°   | 0.0 |
| 82.5° | 0.0 |
| 85°   | 0.0 |
| 87.5° | 0.0 |
| 90°   | 0.0 |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



|       |  |     |
|-------|--|-----|
| 67.5° |  | 0.8 |
| 70°   |  | 0.4 |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)