

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740957

Luminaire Tested: LD4D08D010-EU4DR200210IC9030-4LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740957  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR200210IC9030-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 792.1 lumens  
Efficiency: N/A  
Efficacy: 89.0 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740957

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9030-4LBDP1H

### Luminous Intensity Polar Plot

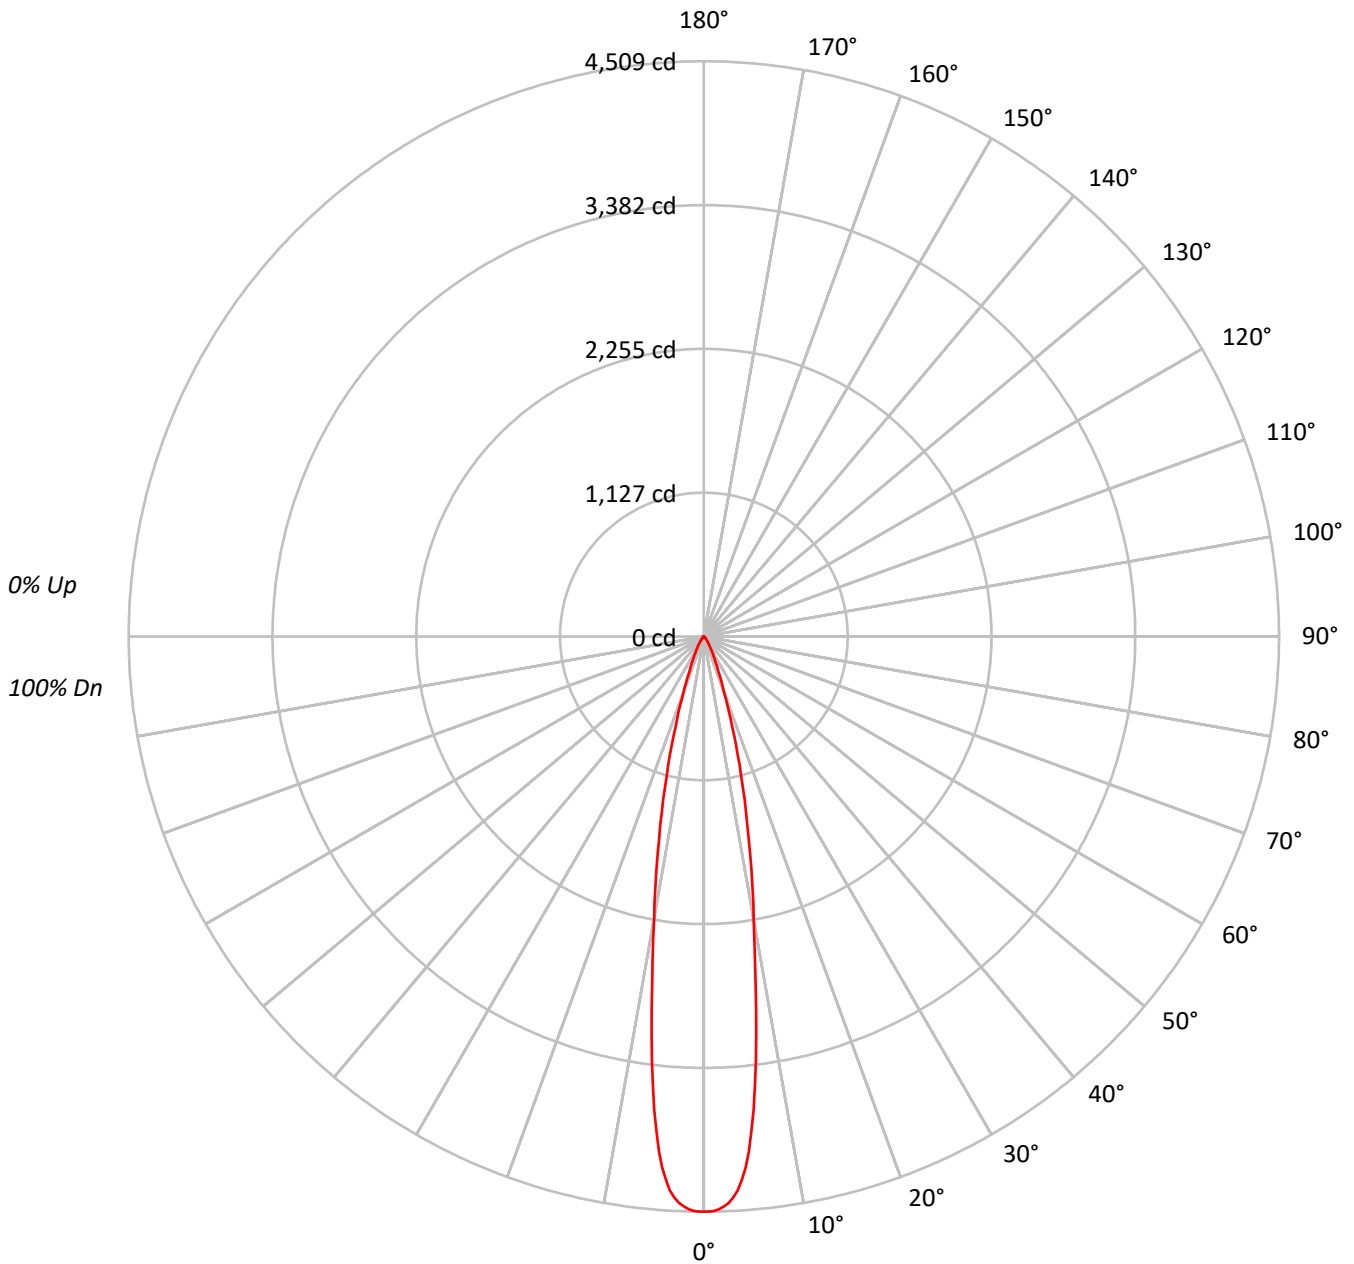



TEST NUMBER: P740957

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9030-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	100	99	98	97	98	96	95	94												
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	98	96	95	94	93	92	91	94												
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	98	96	95	94	93	92	91	94												
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	93	91	89	88	87	86	85	88												
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	91	88	86	85	84	83	82	85												
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	88	86	84	83	82	81	80	83												
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	86	84	82	81	80	79	78	81												
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	84	82	80	79	78	77	76	79												
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	82	80	78	77	76	75	74	77												
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	81	78	76	75	74	73	72	75												

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	492624
5°	444438
10°	249441
15°	126791
20°	53683
25°	24786
30°	13121
35°	7069
40°	3780
45°	2241
50°	1292
55°	686
60°	437
65°	310
70°	128
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2241 cd/sqm



TEST NUMBER: P740957

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9030-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	321.0	40.5
10°-20°	316.1	39.9
20°-30°	103.3	13.0
30°-40°	35.2	4.4
40°-50°	11.8	1.5
50°-60°	3.5	0.4
60°-70°	1.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	740.4	93.5
0°-40°	775.5	97.9
0°-60°	790.9	99.8
0°-90°	792.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	792.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4509	
5°	4052	321
15°	1121	316
25°	206	103
35°	53	35
45°	14	12
55°	4	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P740957

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9030-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4508.7
0.5°	4508.7
1°	4503.1
1.5°	4491.8
2°	4471.3
2.5°	4444.0
3°	4405.5
3.5°	4351.7
4°	4271.8
4.5°	4174.6
5°	4052.2
5.5°	3891.2
6°	3726.2
6.5°	3537.1
7°	3352.0
7.5°	3135.2
8°	2941.7
8.5°	2747.0
9°	2567.1
9.5°	2402.1
10°	2248.3
12.5°	1614.4
15°	1120.9
17.5°	732.3
20°	461.7
22.5°	299.1
25°	205.6
27.5°	144.5
30°	104.0
32.5°	74.7
35°	53.0
37.5°	36.9
40°	26.5
42.5°	19.3
45°	14.5
47.5°	11.2
50°	7.6
52.5°	4.8
55°	3.6
57.5°	2.8
60°	2.0
62.5°	1.6
65°	1.2



TEST NUMBER: P740957

CATALOG NUMBER: LD4D08D010-EU4DR200210IC9030-4LBDP1H

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		0.8
70°		0.4

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)