

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741116

Luminaire Tested: LD4D08D010-EU4DR300210IC9030-4LBS1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P741116
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR300210IC9030-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 720.5 lumens
Efficiency: N/A
Efficacy: 81.0 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741116
CATALOG NUMBER: LD4D08D010-EU4DR300210IC9030-4LBS1B

Luminous Intensity Polar Plot

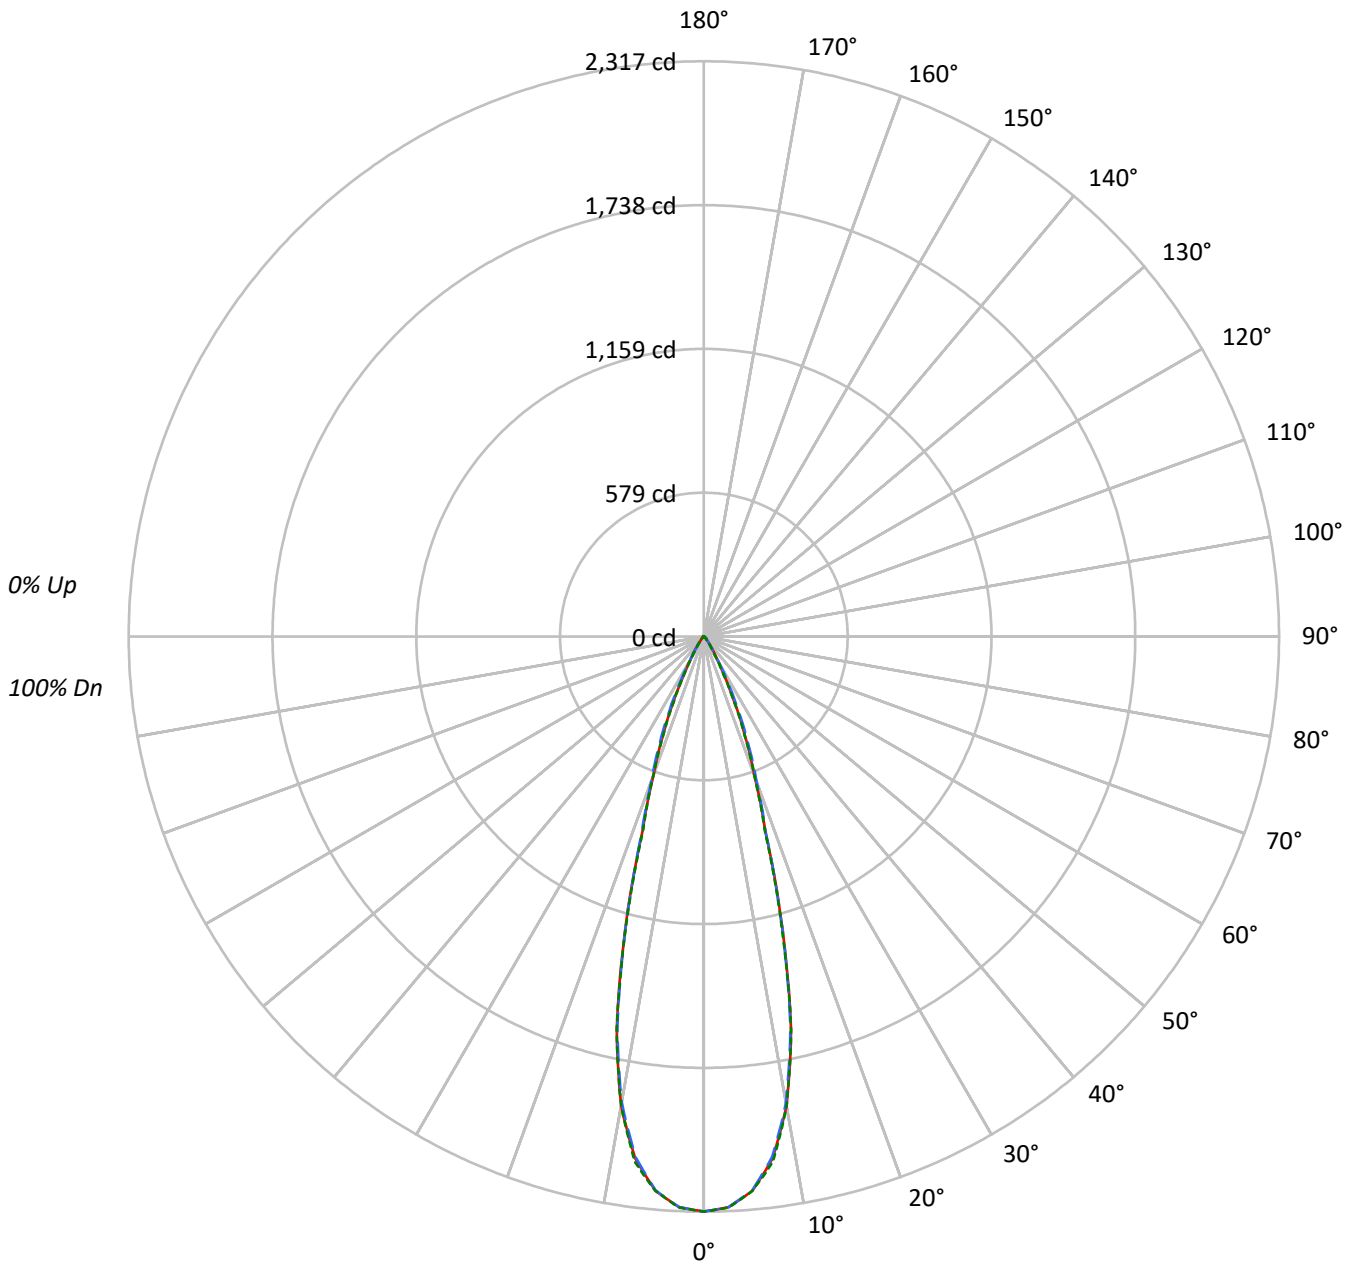



TEST NUMBER: P741116

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9030-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	177320	177320	177320
5°	172227	172028	172235
10°	149176	148119	149145
15°	97327	96804	96321
20°	48393	50209	48328
25°	24383	27491	23884
30°	9767	10633	8503
35°	4532	4336	3635
40°	1948	2168	1839
45°	1375	1710	1386
50°	476	1250	500
55°	280	507	294
60°	199	230	199
65°	127	127	127
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1710 cd/sqm



TEST NUMBER: P741116
 CATALOG NUMBER: LD4D08D010-EU4DR300210IC9030-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	203.7	28.3
10°-20°	328.1	45.5
20°-30°	141.8	19.7
30°-40°	32.3	4.5
40°-50°	11.1	1.5
50°-60°	2.7	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	673.6	93.5
0°-40°	705.9	98.0
0°-60°	719.7	99.9
0°-90°	720.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	720.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2317	2317	2317	2317	2317	
5°	2242	2239	2239	2244	2242	204
15°	1228	1214	1222	1218	1216	329
25°	289	300	326	292	283	138
35°	48	50	46	46	39	33
45°	13	16	16	16	13	9
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P741116

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9030-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2316.6	2316.6	2316.6	2316.6	2316.6
2.5°	2301.2	2299.7	2300.6	2301.7	2302.1
5°	2241.5	2239.4	2238.9	2243.6	2241.6
7.5°	2121.1	2118.0	2113.3	2123.9	2133.8
10°	1919.3	1915.9	1905.7	1910.8	1918.9
12.5°	1621.5	1610.4	1610.2	1626.1	1623.9
15°	1228.2	1213.5	1221.6	1217.6	1215.5
17.5°	826.0	820.3	831.2	827.9	813.6
20°	594.1	595.6	616.4	606.0	593.3
22.5°	433.6	438.9	463.6	436.6	426.7
25°	288.7	299.6	325.5	292.0	282.8
27.5°	177.6	182.5	208.8	175.3	170.3
30°	110.5	107.9	120.3	103.2	96.2
32.5°	72.5	69.3	73.2	65.7	60.0
35°	48.5	49.5	46.4	46.1	38.9
37.5°	30.3	34.8	30.7	32.8	25.0
40°	19.5	25.3	21.7	24.0	18.4
42.5°	16.0	19.4	17.9	19.0	16.4
45°	12.7	15.8	15.8	15.8	12.8
47.5°	7.0	10.6	13.5	10.8	7.5
50°	4.0	5.3	10.5	5.6	4.2
52.5°	2.8	3.1	7.2	3.2	2.9
55°	2.1	2.2	3.8	2.3	2.2
57.5°	1.6	1.7	2.1	1.7	1.6
60°	1.3	1.3	1.5	1.4	1.3
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.7	0.7	0.7	0.7	0.7
67.5°	0.3	0.5	0.5	0.5	0.5
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)