

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741119

Luminaire Tested: LD4D08D010-EU4DR300210IC9030-4LBS1MW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741119  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR300210IC9030-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 730.4 lumens  
Efficiency: N/A  
Efficacy: 82.1 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741119

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9030-4LBS1MW

### Luminous Intensity Polar Plot

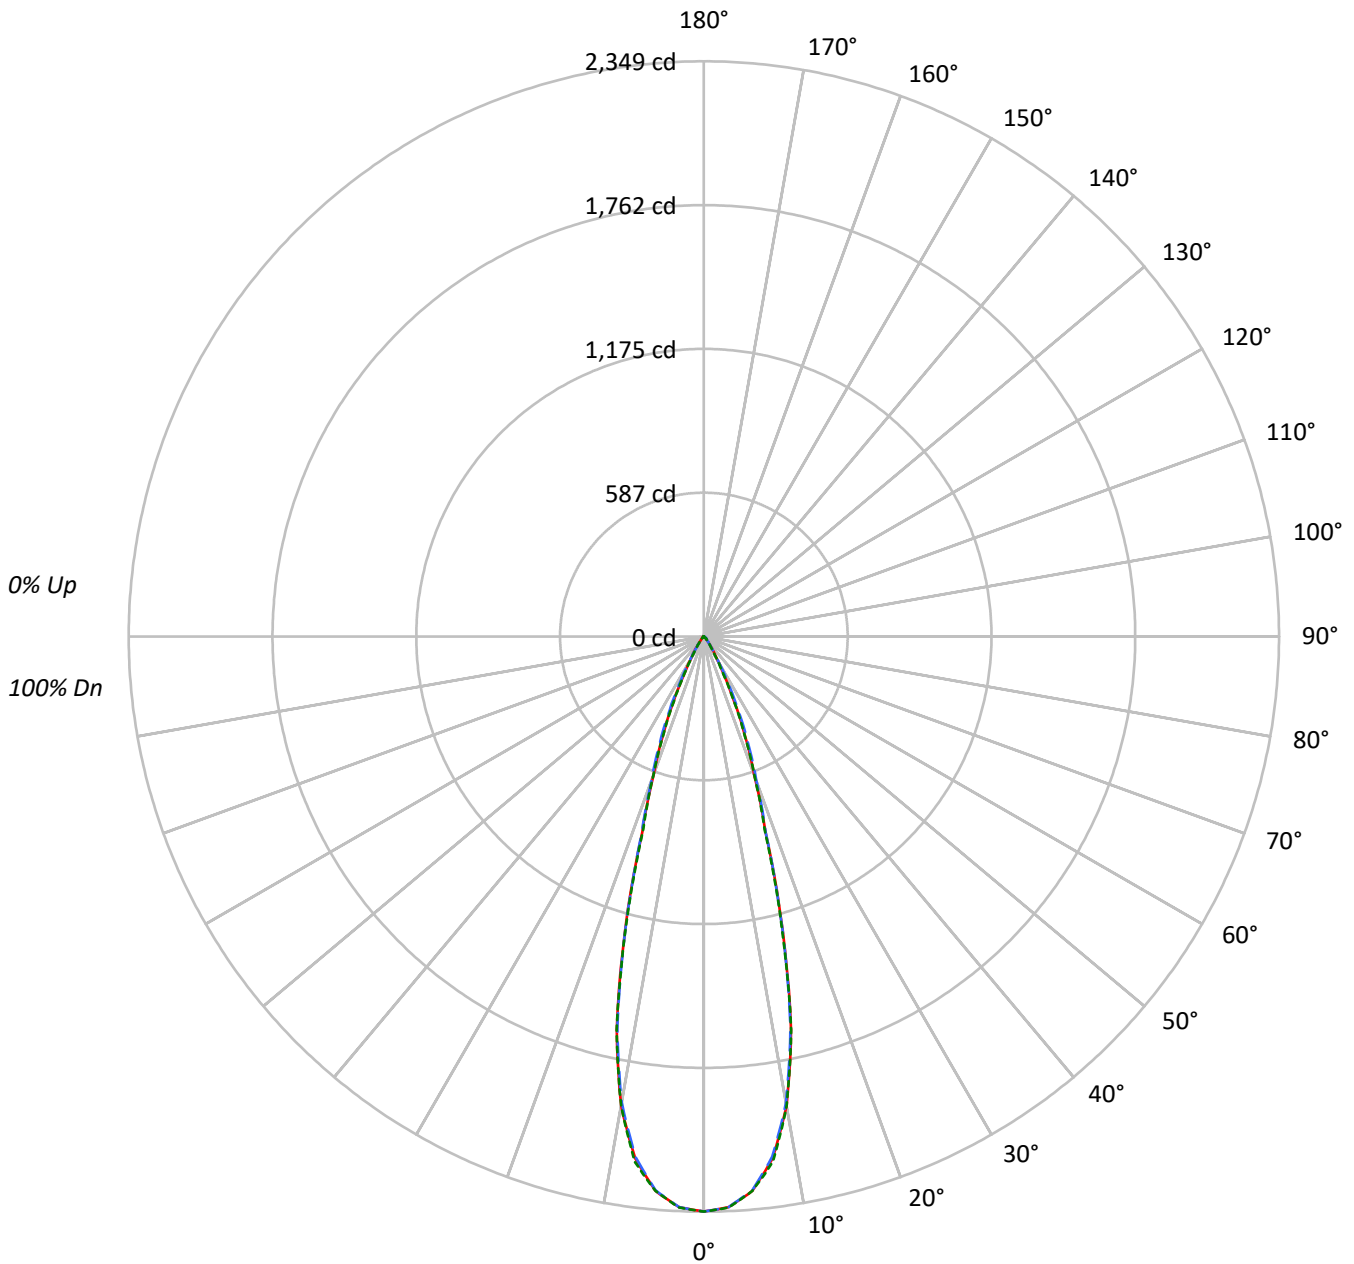



TEST NUMBER: P741119

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9030-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	179770	179770	179770
5°	174617	174410	174625
10°	151244	150171	151205
15°	98682	98143	97652
20°	49069	50910	49004
25°	24720	27871	24205
30°	9899	10783	8626
35°	4588	4392	3682
40°	1978	2198	1869
45°	1396	1732	1407
50°	476	1262	500
55°	280	520	294
60°	199	230	199
65°	127	127	127
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1732 cd/sqm



TEST NUMBER: P741119

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9030-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	206.5	28.3
10°-20°	332.6	45.5
20°-30°	143.7	19.7
30°-40°	32.8	4.5
40°-50°	11.2	1.5
50°-60°	2.7	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	682.9	93.5
0°-40°	715.6	98.0
0°-60°	729.6	99.9
0°-90°	730.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	730.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2349	2349	2349	2349	2349	
5°	2273	2270	2270	2275	2273	207
15°	1245	1230	1238	1234	1232	333
25°	293	304	330	296	287	140
35°	49	50	47	47	39	33
45°	13	16	16	16	13	9
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P741119

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9030-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2348.6	2348.6	2348.6	2348.6	2348.6
2.5°	2333.1	2331.5	2332.4	2333.5	2334.0
5°	2272.6	2270.3	2269.9	2274.6	2272.7
7.5°	2150.4	2147.3	2142.5	2153.3	2163.3
10°	1945.9	1942.4	1932.1	1937.2	1945.4
12.5°	1643.9	1632.7	1632.5	1648.6	1646.4
15°	1245.3	1230.2	1238.5	1234.5	1232.3
17.5°	837.4	831.6	842.7	839.3	824.9
20°	602.4	603.9	625.0	614.4	601.6
22.5°	439.6	445.0	470.0	442.7	432.6
25°	292.7	303.7	330.0	296.0	286.6
27.5°	180.0	185.1	211.7	177.7	172.6
30°	112.0	109.4	122.0	104.7	97.6
32.5°	73.5	70.2	74.3	66.6	60.9
35°	49.1	50.1	47.0	46.7	39.4
37.5°	30.7	35.3	31.1	33.2	25.4
40°	19.8	25.6	22.0	24.4	18.7
42.5°	16.3	19.7	18.1	19.3	16.6
45°	12.9	16.0	16.0	16.0	13.0
47.5°	7.2	10.7	13.7	10.9	7.6
50°	4.0	5.4	10.6	5.7	4.2
52.5°	2.8	3.1	7.3	3.2	2.9
55°	2.1	2.2	3.9	2.3	2.2
57.5°	1.6	1.7	2.1	1.7	1.6
60°	1.3	1.3	1.5	1.4	1.3
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.7	0.7	0.7	0.7	0.7
67.5°	0.3	0.5	0.5	0.5	0.5
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)