

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741195

Luminaire Tested: LD4D08D010-EU4DR350210IC9030-4LBS1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741195  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR350210IC9030-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 751.6 lumens  
Efficiency: N/A  
Efficacy: 84.4 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741195  
CATALOG NUMBER: LD4D08D010-EU4DR350210IC9030-4LBS1H

### Luminous Intensity Polar Plot

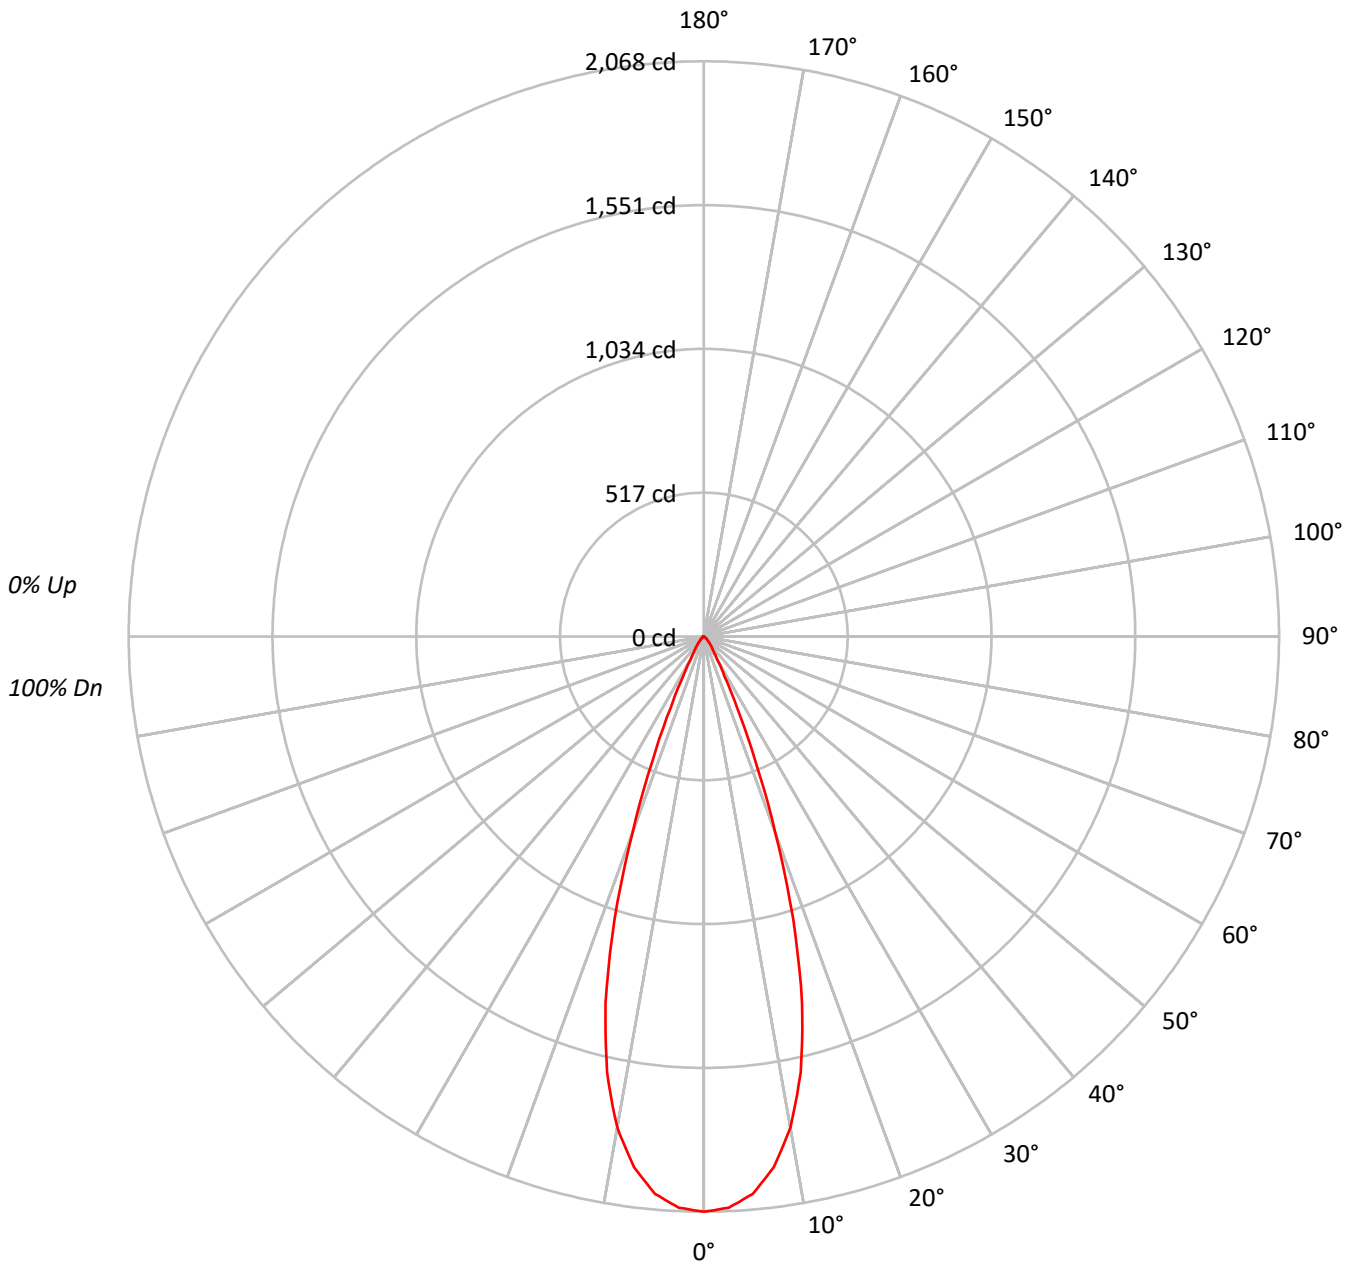



TEST NUMBER: P741195

CATALOG NUMBER: LD4D08D010-EU4DR350210IC9030-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96	96	96	96
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88	88	88	88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84	84	84	84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81	81	81	81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78	78	78	78
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75	75	75	75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72	72	72	72
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70	70	70	70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68	68	68	68

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	225951
5°	220639
10°	198860
15°	154345
20°	87542
25°	34057
30°	12705
35°	6963
40°	4550
45°	2766
50°	1768
55°	1238
60°	918
65°	491
70°	32
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2766 cd/sqm



TEST NUMBER: P741195

CATALOG NUMBER: LD4D08D010-EU4DR350210IC9030-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	185.0	24.6
10°-20°	361.2	48.1
20°-30°	147.3	19.6
30°-40°	35.3	4.7
40°-50°	14.7	2.0
50°-60°	6.1	0.8
60°-70°	1.9	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	693.6	92.3
0°-40°	728.8	97.0
0°-60°	749.6	99.7
0°-90°	751.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	751.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2068	
5°	2012	185
15°	1364	361
25°	282	147
35°	52	35
45°	18	15
55°	6	6
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P741195

CATALOG NUMBER: LD4D08D010-EU4DR350210IC9030-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2068.0
2.5°	2055.6
5°	2011.7
7.5°	1924.2
10°	1792.4
12.5°	1606.7
15°	1364.5
17.5°	1068.2
20°	752.9
22.5°	480.1
25°	282.5
27.5°	159.7
30°	100.7
32.5°	70.7
35°	52.2
37.5°	40.4
40°	31.9
42.5°	24.6
45°	17.9
47.5°	13.4
50°	10.4
52.5°	8.3
55°	6.5
57.5°	5.3
60°	4.2
62.5°	3.0
65°	1.9
67.5°	0.7
70°	0.1
72.5°	0.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.1
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)