

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741350

Luminaire Tested: LD4D08D010-EU4DR450210IC9030-4LBS1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P741350
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR450210IC9030-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 754.8 lumens
Efficiency: N/A
Efficacy: 84.8 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741350
CATALOG NUMBER: LD4D08D010-EU4DR450210IC9030-4LBS1B

Luminous Intensity Polar Plot

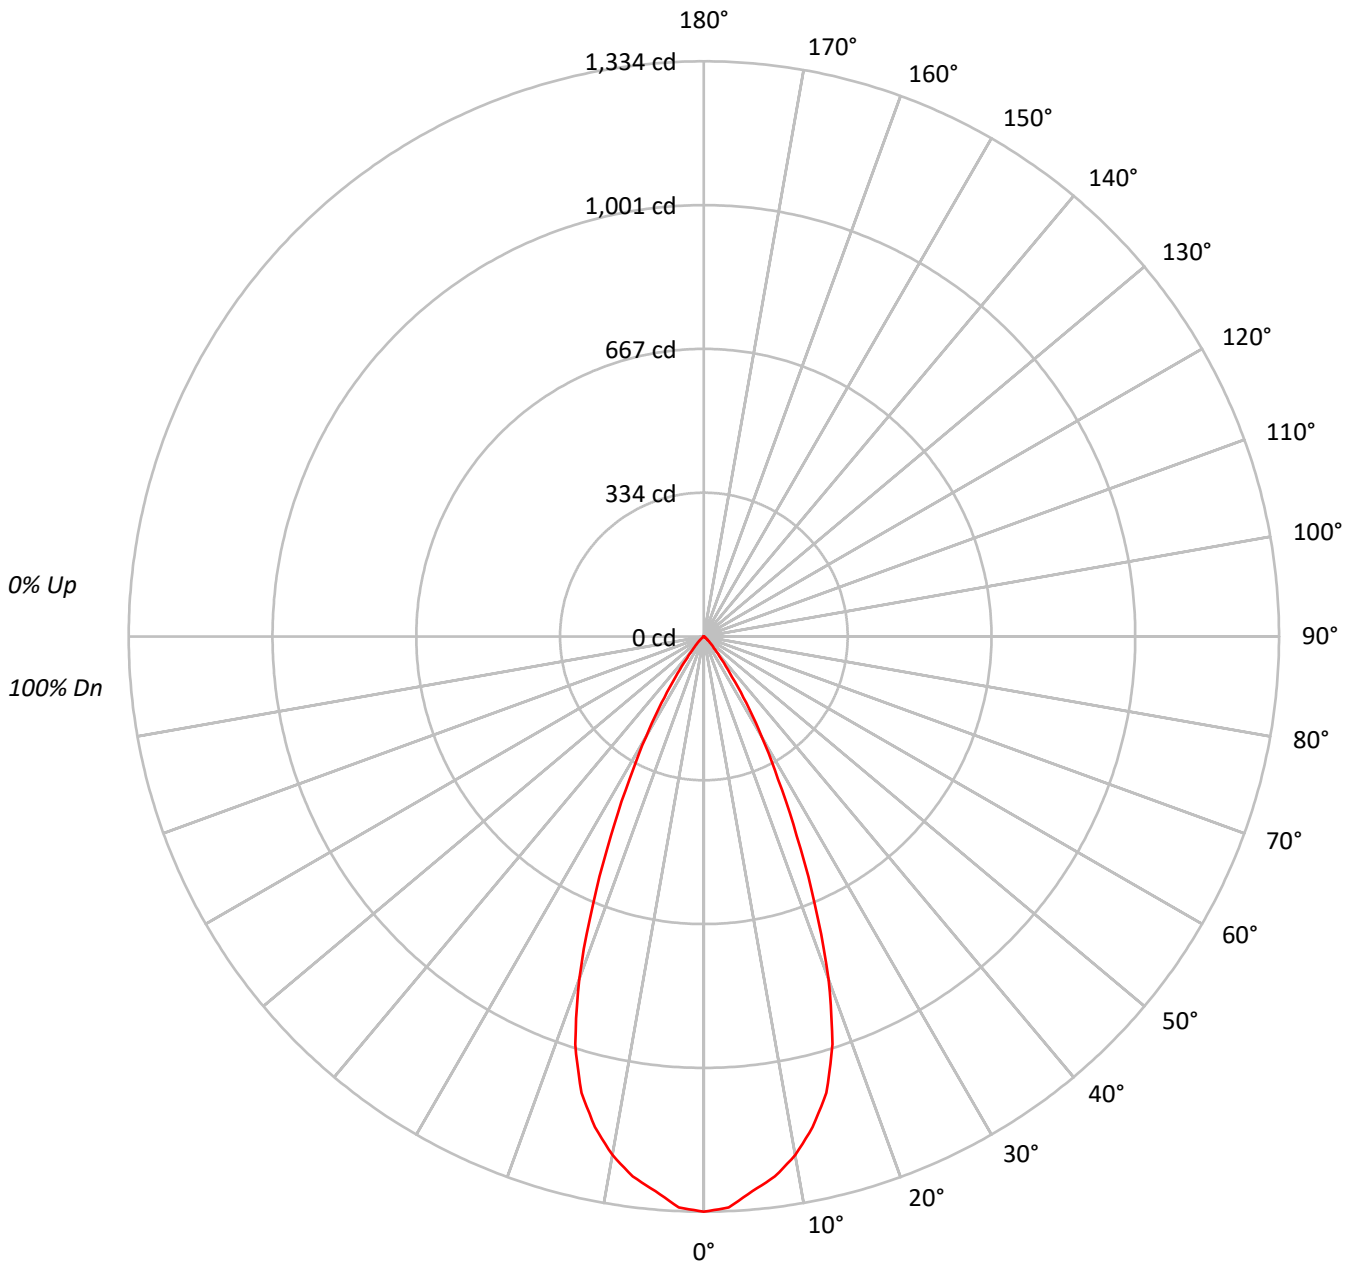



TEST NUMBER: P741350

CATALOG NUMBER: LD4D08D010-EU4DR450210IC9030-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95					95			
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90					90			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85					85			
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81					81			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77					77			
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73					73			
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69					69			
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66					66			
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63					63			
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60					60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	145765
5°	141605
10°	135476
15°	123997
20°	98367
25°	61411
30°	33850
35°	15206
40°	5990
45°	2828
50°	1326
55°	705
60°	328
65°	78
70°	32
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2828 cd/sqm



TEST NUMBER: P741350

CATALOG NUMBER: LD4D08D010-EU4DR450210IC9030-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.3	16.1
10°-20°	298.6	39.6
20°-30°	236.4	31.3
30°-40°	78.8	10.4
40°-50°	15.6	2.1
50°-60°	3.5	0.5
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	656.3	87.0
0°-40°	735.1	97.4
0°-60°	754.2	99.9
0°-90°	754.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	754.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1334	
5°	1291	121
15°	1096	299
25°	509	236
35°	114	79
45°	18	16
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P741350
CATALOG NUMBER: LD4D08D010-EU4DR450210IC9030-4LBS1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	1334.1
2.5°	1325.3
5°	1291.1
7.5°	1262.9
10°	1221.1
12.5°	1165.6
15°	1096.2
17.5°	991.9
20°	846.0
22.5°	672.2
25°	509.4
27.5°	373.0
30°	268.3
32.5°	182.5
35°	114.0
37.5°	67.6
40°	42.0
42.5°	27.6
45°	18.3
47.5°	11.7
50°	7.8
52.5°	5.3
55°	3.7
57.5°	2.4
60°	1.5
62.5°	0.9
65°	0.3
67.5°	0.1
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)