

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741751

Luminaire Tested: LD4D08D010-EU4DR700210IC9035-4LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P741751
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR700210IC9035-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 836.3 lumens
Efficiency: N/A
Efficacy: 94.0 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')

CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741751

CATALOG NUMBER: LD4D08D010-EU4DR700210IC9035-4LBDP1LI

Luminous Intensity Polar Plot

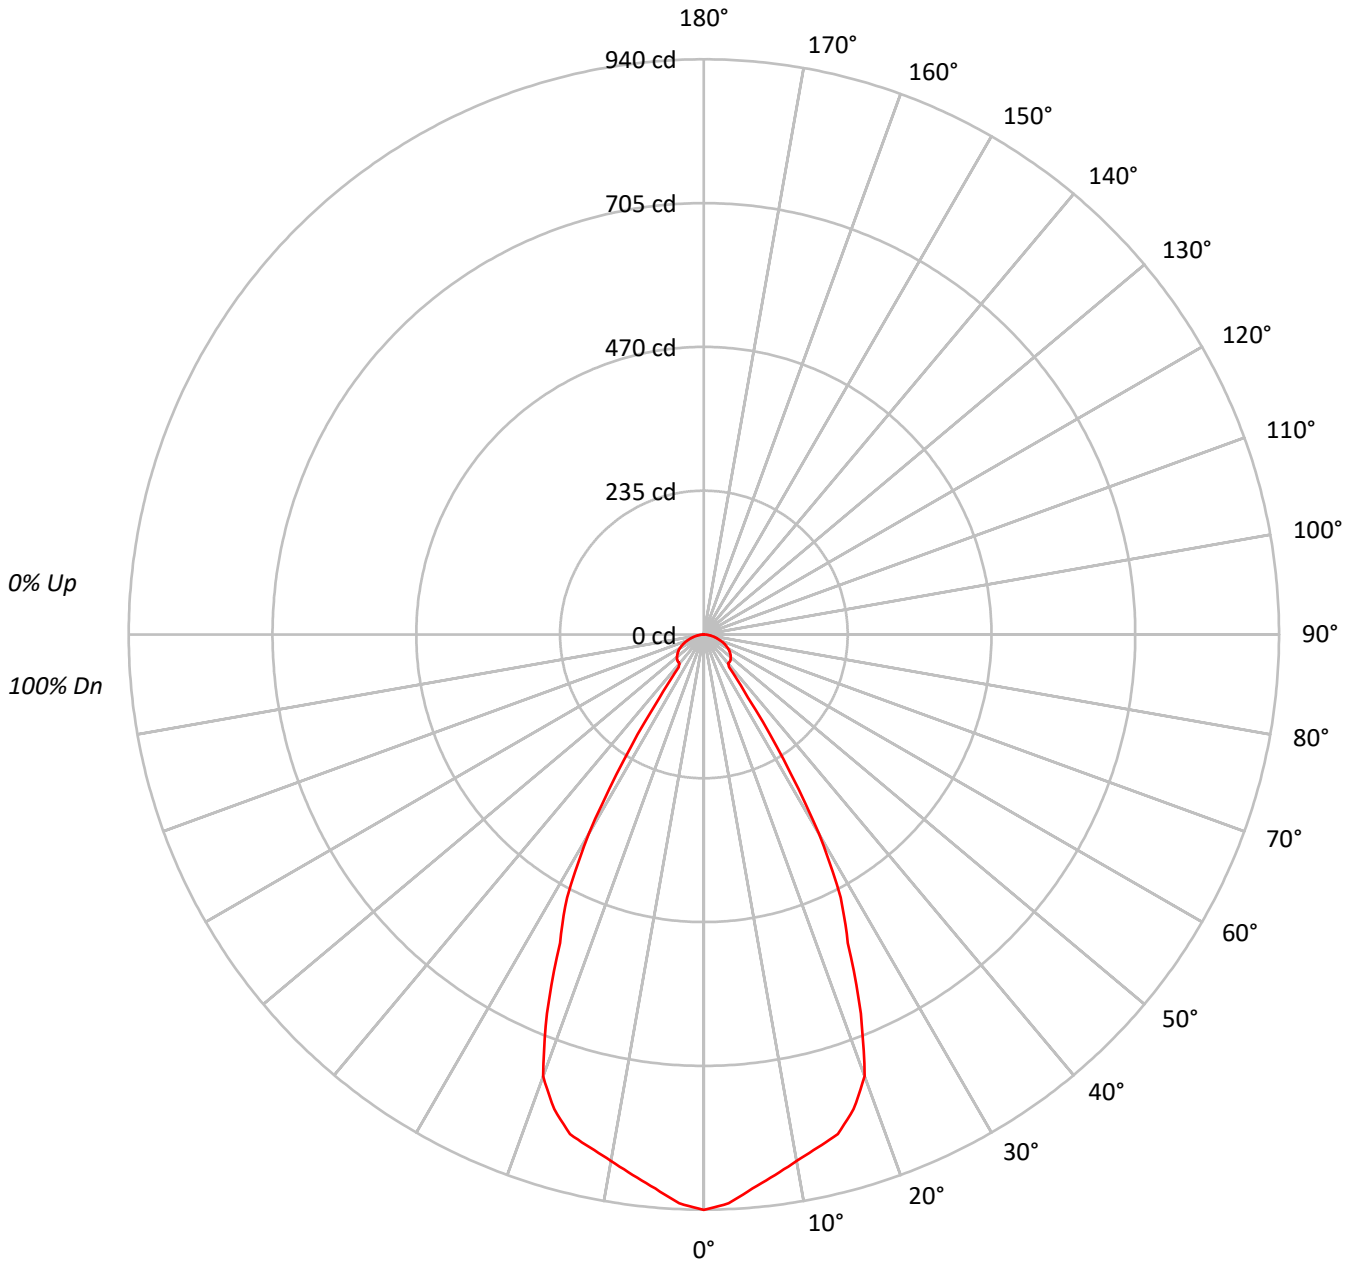



TEST NUMBER: P741751

CATALOG NUMBER: LD4D08D010-EU4DR700210IC9035-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			70
5	89	80	74	69	88	79	73	69	77	72	68	75	71	67	74	70	67	65			65
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			53
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			50
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	102749
5°	99686
10°	96912
15°	95639
20°	89309
25°	67101
30°	47425
35°	16793
40°	8829
45°	9410
50°	9740
55°	9925
60°	9986
65°	9773
70°	9232
75°	8527
80°	7550
85°	6143

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 10005 cd/sqm



TEST NUMBER: P741751

CATALOG NUMBER: LD4D08D010-EU4DR700210IC9035-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.7	10.3
10°-20°	235.2	28.1
20°-30°	259.0	31.0
30°-40°	98.9	11.8
40°-50°	46.7	5.6
50°-60°	46.5	5.6
60°-70°	37.2	4.4
70°-80°	21.3	2.6
80°-90°	5.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	579.9	69.3
0°-40°	678.8	81.2
0°-60°	772.0	92.3
0°-90°	836.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	836.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	940	
5°	909	86
15°	846	235
25°	557	259
35°	126	99
45°	61	47
55°	52	46
65°	38	37
75°	20	21
85°	5	6
90°	0	



TEST NUMBER: P741751

CATALOG NUMBER: LD4D08D010-EU4DR700210IC9035-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	940.4
2.5°	930.5
5°	908.9
7.5°	890.9
10°	873.5
12.5°	858.8
15°	845.5
17.5°	813.5
20°	768.1
22.5°	670.1
25°	556.6
27.5°	484.5
30°	375.9
32.5°	242.8
35°	125.9
37.5°	68.1
40°	61.9
42.5°	61.5
45°	60.9
47.5°	59.5
50°	57.3
52.5°	54.8
55°	52.1
57.5°	49.2
60°	45.7
62.5°	41.8
65°	37.8
67.5°	33.3
70°	28.9
72.5°	24.4
75°	20.2
77.5°	15.9
80°	12.0
82.5°	8.5
85°	4.9
87.5°	1.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)