

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741061

Luminaire Tested: LD4D08D010-EU4DR250210IC9040-4LBDP1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741061  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR250210IC9040-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 724.6 lumens  
Efficiency: N/A  
Efficacy: 81.4 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741061  
CATALOG NUMBER: LD4D08D010-EU4DR250210IC9040-4LBDP1H

### Luminous Intensity Polar Plot

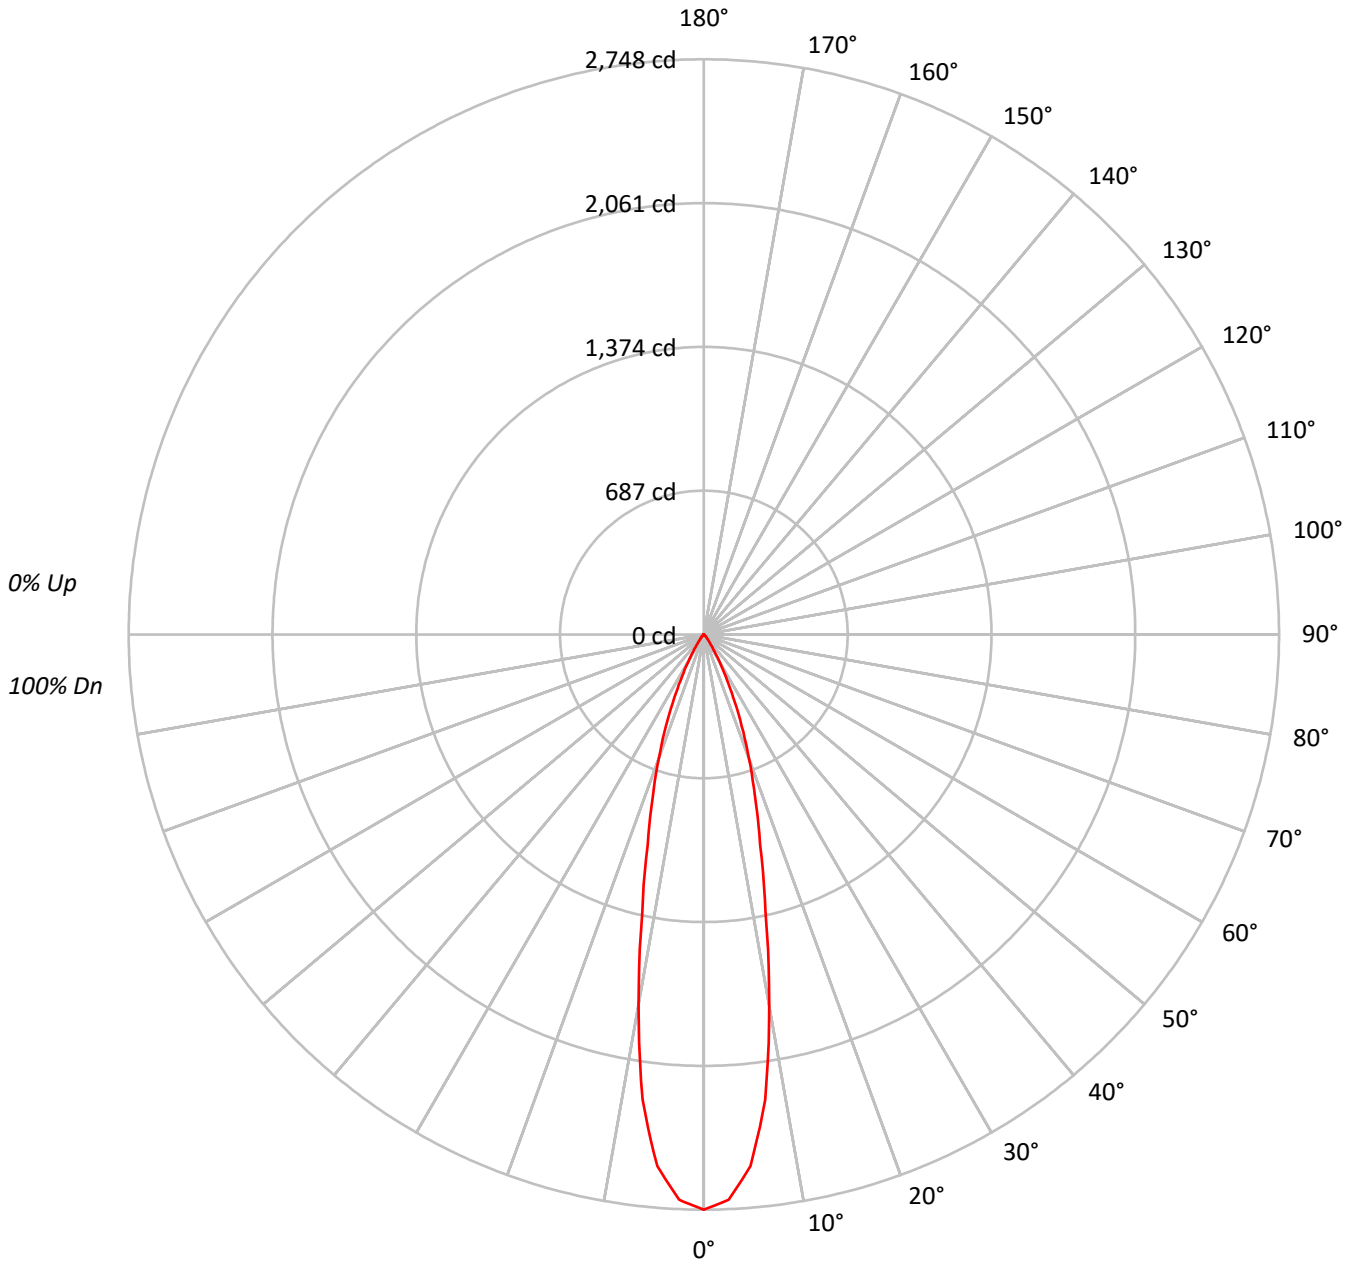



TEST NUMBER: P741061

CATALOG NUMBER: LD4D08D010-EU4DR250210IC9040-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	300281
5°	279668
10°	199493
15°	117504
20°	73112
25°	40121
30°	18344
35°	6949
40°	3152
45°	1901
50°	782
55°	495
60°	350
65°	233
70°	32
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1901 cd/sqm



TEST NUMBER: P741061

CATALOG NUMBER: LD4D08D010-EU4DR250210IC9040-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	219.1	30.2
10°-20°	296.8	41.0
20°-30°	157.1	21.7
30°-40°	38.8	5.4
40°-50°	9.5	1.3
50°-60°	2.5	0.3
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	673.0	92.9
0°-40°	711.8	98.2
0°-60°	723.7	99.9
0°-90°	724.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	724.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2748	
5°	2550	219
15°	1039	297
25°	333	157
35°	52	39
45°	12	9
55°	3	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P741061

CATALOG NUMBER: LD4D08D010-EU4DR250210IC9040-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2748.3
2.5°	2703.1
5°	2549.9
7.5°	2242.2
10°	1798.1
12.5°	1359.3
15°	1038.8
17.5°	809.5
20°	628.8
22.5°	471.5
25°	332.8
27.5°	223.2
30°	145.4
32.5°	88.5
35°	52.1
37.5°	31.9
40°	22.1
42.5°	16.8
45°	12.3
47.5°	7.4
50°	4.6
52.5°	3.3
55°	2.6
57.5°	2.1
60°	1.6
62.5°	1.3
65°	0.9
67.5°	0.3
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)