

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741607

Luminaire Tested: LD4D08D010-EU4DR600210IC9040-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P741607
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR600210IC9040-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 813.3 lumens
Efficiency: N/A
Efficacy: 91.4 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741607

CATALOG NUMBER: LD4D08D010-EU4DR600210IC9040-4LBDP1H

Luminous Intensity Polar Plot

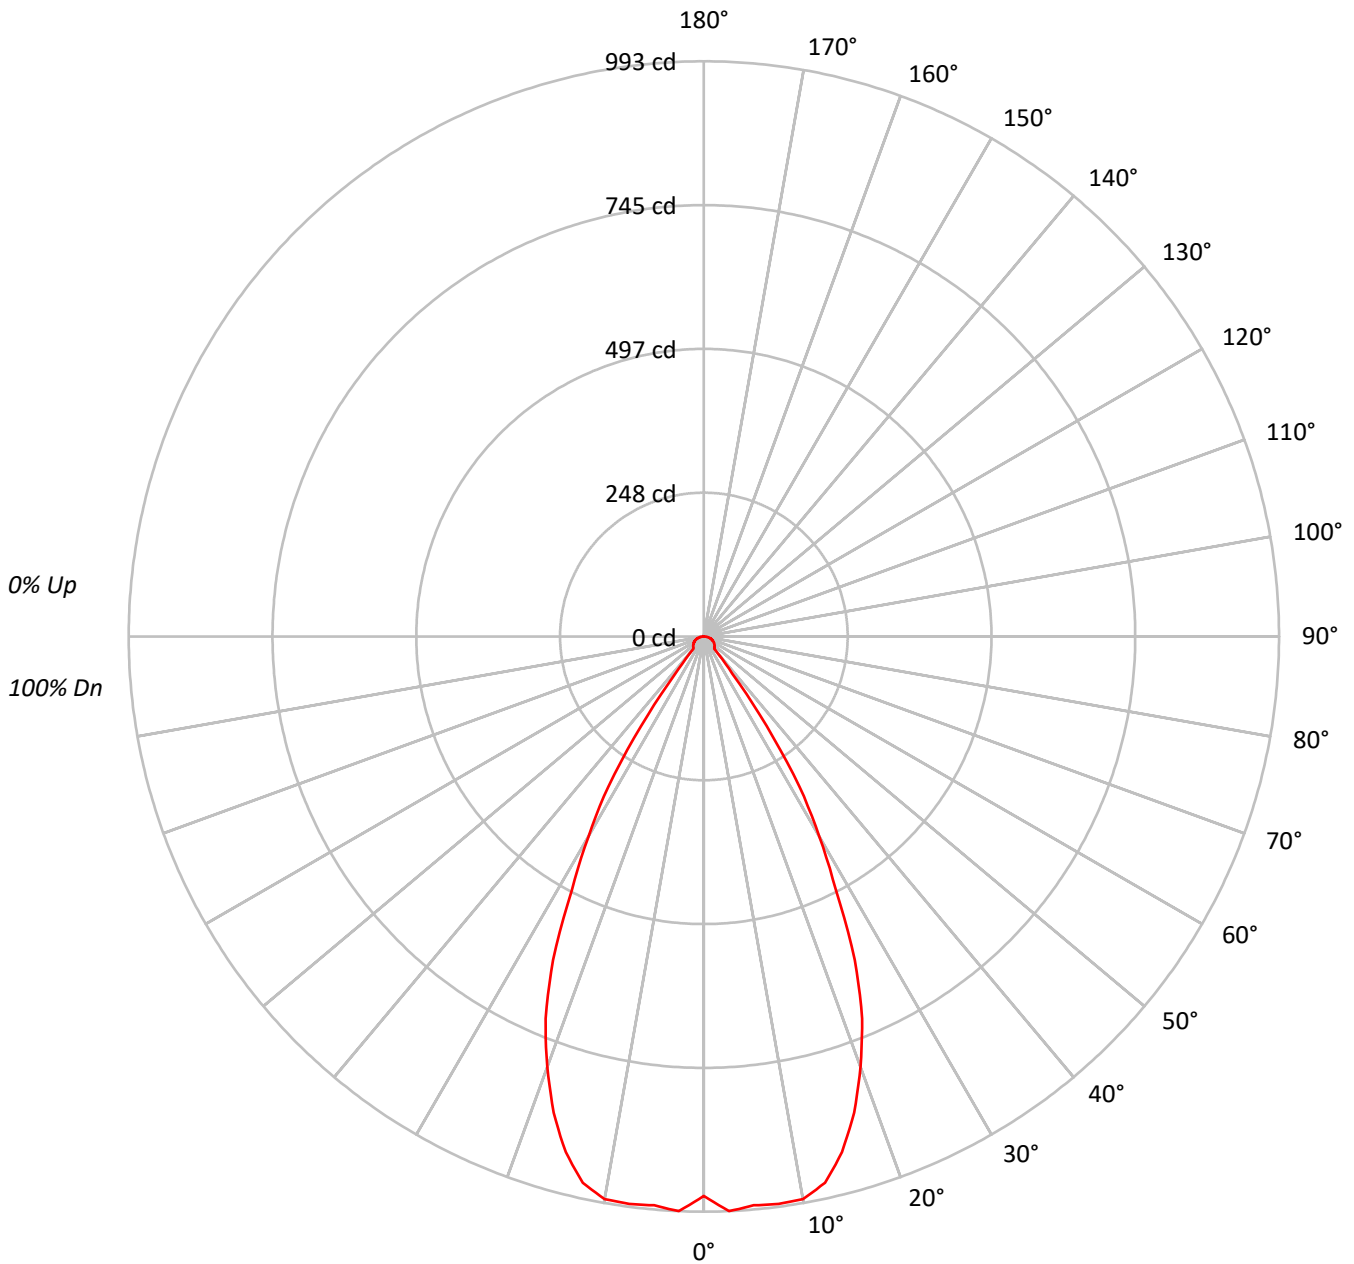



TEST NUMBER: P741607

CATALOG NUMBER: LD4D08D010-EU4DR600210IC9040-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	105535
5°	108132
10°	109426
15°	104247
20°	91914
25°	74347
30°	50289
35°	25196
40°	4079
45°	4002
50°	4080
55°	4153
60°	4261
65°	4343
70°	4472
75°	4517
80°	4342
85°	3636

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 4517 cd/sqm



TEST NUMBER: P741607

CATALOG NUMBER: LD4D08D010-EU4DR600210IC9040-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.2	11.6
10°-20°	254.9	31.3
20°-30°	274.3	33.7
30°-40°	119.2	14.7
40°-50°	20.0	2.5
50°-60°	19.5	2.4
60°-70°	16.7	2.0
70°-80°	11.1	1.4
80°-90°	3.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	623.4	76.7
0°-40°	742.7	91.3
0°-60°	782.2	96.2
0°-90°	813.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	813.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	966	
5°	986	94
15°	922	255
25°	617	274
35°	189	119
45°	26	20
55°	22	19
65°	17	17
75°	11	11
85°	3	3
90°	0	



TEST NUMBER: P741607

CATALOG NUMBER: LD4D08D010-EU4DR600210IC9040-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	965.9
2.5°	993.0
5°	985.9
7.5°	988.1
10°	986.3
12.5°	966.0
15°	921.6
17.5°	862.1
20°	790.5
22.5°	714.0
25°	616.7
27.5°	493.3
30°	398.6
32.5°	307.2
35°	188.9
37.5°	80.8
40°	28.6
42.5°	26.4
45°	25.9
47.5°	25.0
50°	24.0
52.5°	22.9
55°	21.8
57.5°	20.6
60°	19.5
62.5°	18.2
65°	16.8
67.5°	15.5
70°	14.0
72.5°	12.3
75°	10.7
77.5°	8.8
80°	6.9
82.5°	4.9
85°	2.9
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)