

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741151

Luminaire Tested: LD4D08D010-EU4DR300210IC9050-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P741151
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR300210IC9050-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 630.1 lumens
Efficiency: N/A
Efficacy: 70.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741151

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9050-4LBDP1B

Luminous Intensity Polar Plot

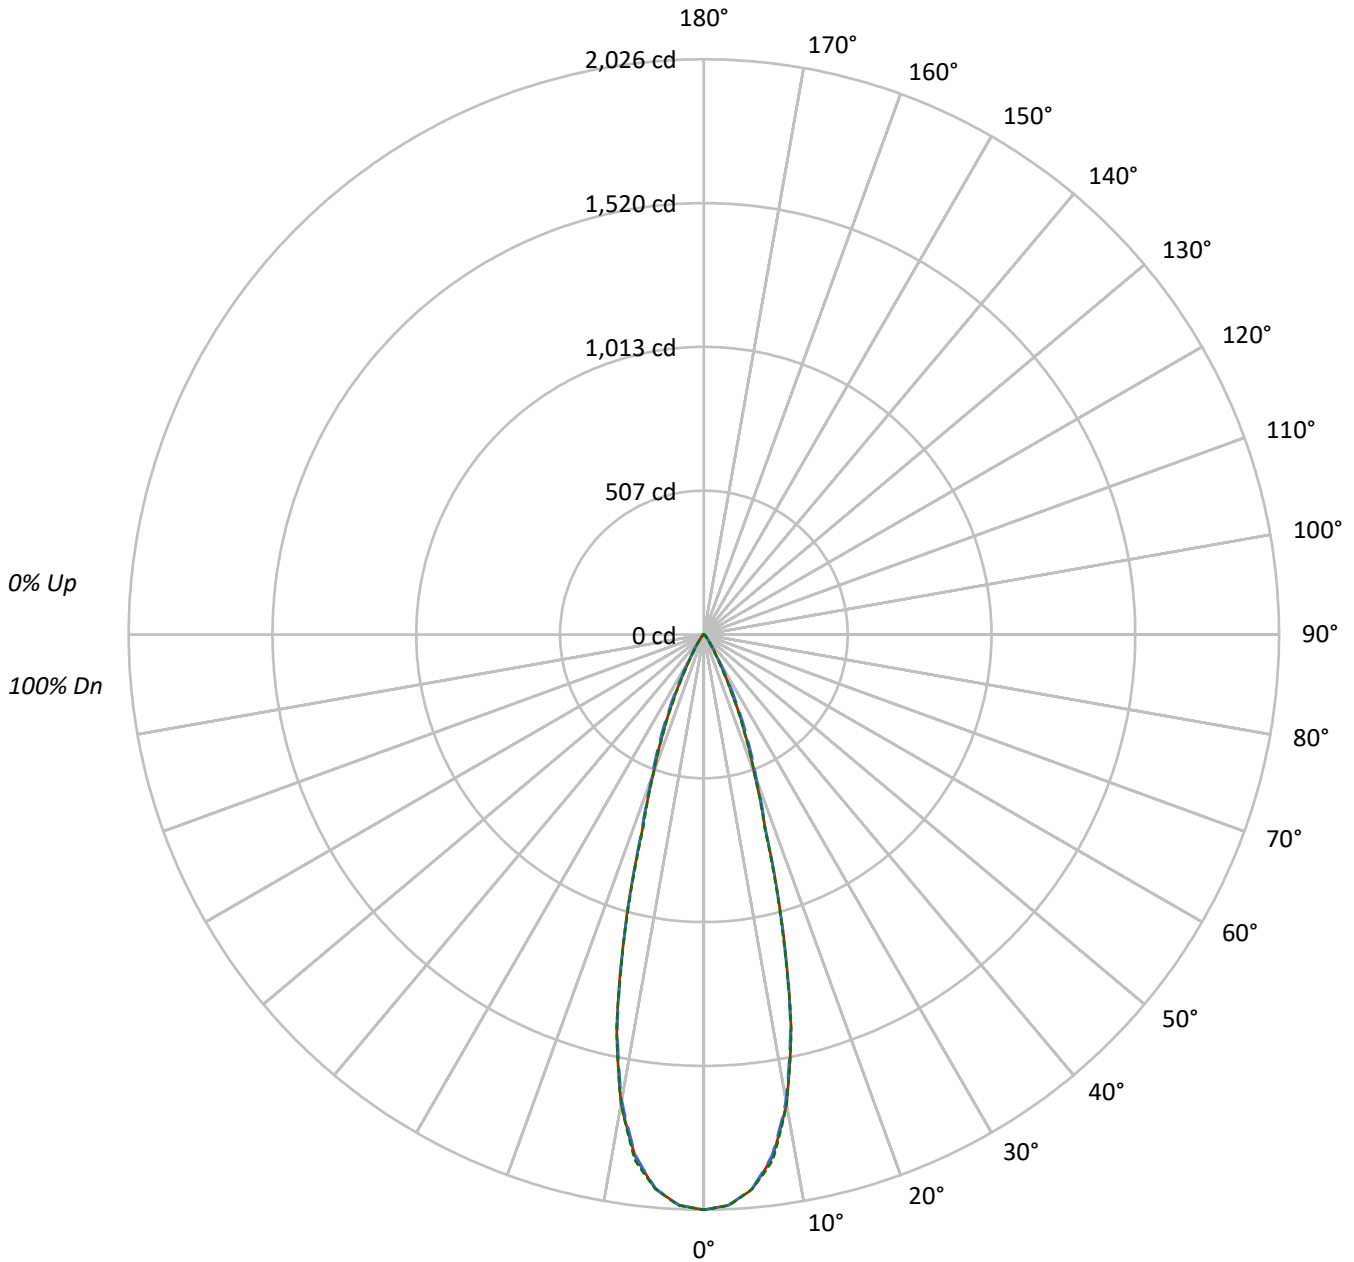



TEST NUMBER: P741151

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9050-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	155077	155077	155077
5°	150621	150452	150629
10°	130460	129543	130429
15°	85123	84664	84236
20°	42324	43913	42267
25°	21317	24045	20886
30°	8538	9307	7442
35°	3962	3794	3177
40°	1709	1898	1609
45°	1202	1494	1212
50°	417	1096	441
55°	240	454	254
60°	168	199	168
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1494 cd/sqm



TEST NUMBER: P741151

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9050-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	178.2	28.3
10°-20°	286.9	45.5
20°-30°	124.0	19.7
30°-40°	28.3	4.5
40°-50°	9.7	1.5
50°-60°	2.4	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	589.1	93.5
0°-40°	617.3	98.0
0°-60°	629.4	99.9
0°-90°	630.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	630.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2026	2026	2026	2026	2026	
5°	1960	1958	1958	1962	1960	178
15°	1074	1061	1068	1065	1063	288
25°	252	262	285	255	247	121
35°	42	43	41	40	34	29
45°	11	14	14	14	11	8
55°	2	2	3	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P741151

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9050-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2026.0	2026.0	2026.0	2026.0	2026.0
2.5°	2012.5	2011.2	2011.9	2012.9	2013.3
5°	1960.3	1958.4	1958.1	1962.1	1960.4
7.5°	1855.0	1852.3	1848.2	1857.4	1866.1
10°	1678.5	1675.5	1666.7	1671.1	1678.1
12.5°	1418.0	1408.4	1408.2	1422.1	1420.2
15°	1074.2	1061.2	1068.4	1064.9	1063.0
17.5°	722.3	717.4	726.9	724.0	711.6
20°	519.6	520.9	539.1	530.0	518.9
22.5°	379.2	383.8	405.4	381.9	373.2
25°	252.4	262.0	284.7	255.3	247.3
27.5°	155.3	159.6	182.6	153.3	148.9
30°	96.6	94.4	105.3	90.3	84.2
32.5°	63.4	60.6	64.1	57.5	52.5
35°	42.4	43.3	40.6	40.3	34.0
37.5°	26.5	30.4	26.9	28.6	21.9
40°	17.1	22.1	19.0	21.0	16.1
42.5°	14.0	17.0	15.6	16.6	14.3
45°	11.1	13.8	13.8	13.8	11.2
47.5°	6.2	9.2	11.9	9.5	6.6
50°	3.5	4.7	9.2	4.9	3.7
52.5°	2.4	2.7	6.2	2.8	2.5
55°	1.8	1.9	3.4	2.0	1.9
57.5°	1.4	1.5	1.8	1.5	1.4
60°	1.1	1.1	1.3	1.2	1.1
62.5°	0.8	0.8	0.9	0.8	0.8
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)