

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754160

Luminaire Tested: LD4D80BD010-EU4DR5570959024-4LBDP1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P754160
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D80BD010-EU4DR5570959024-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7001.9 lumens
Efficiency: N/A
Efficacy: 88.7 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P754160
CATALOG NUMBER: LD4D80BD010-EU4DR5570959024-4LBDP1LI

Luminous Intensity Polar Plot

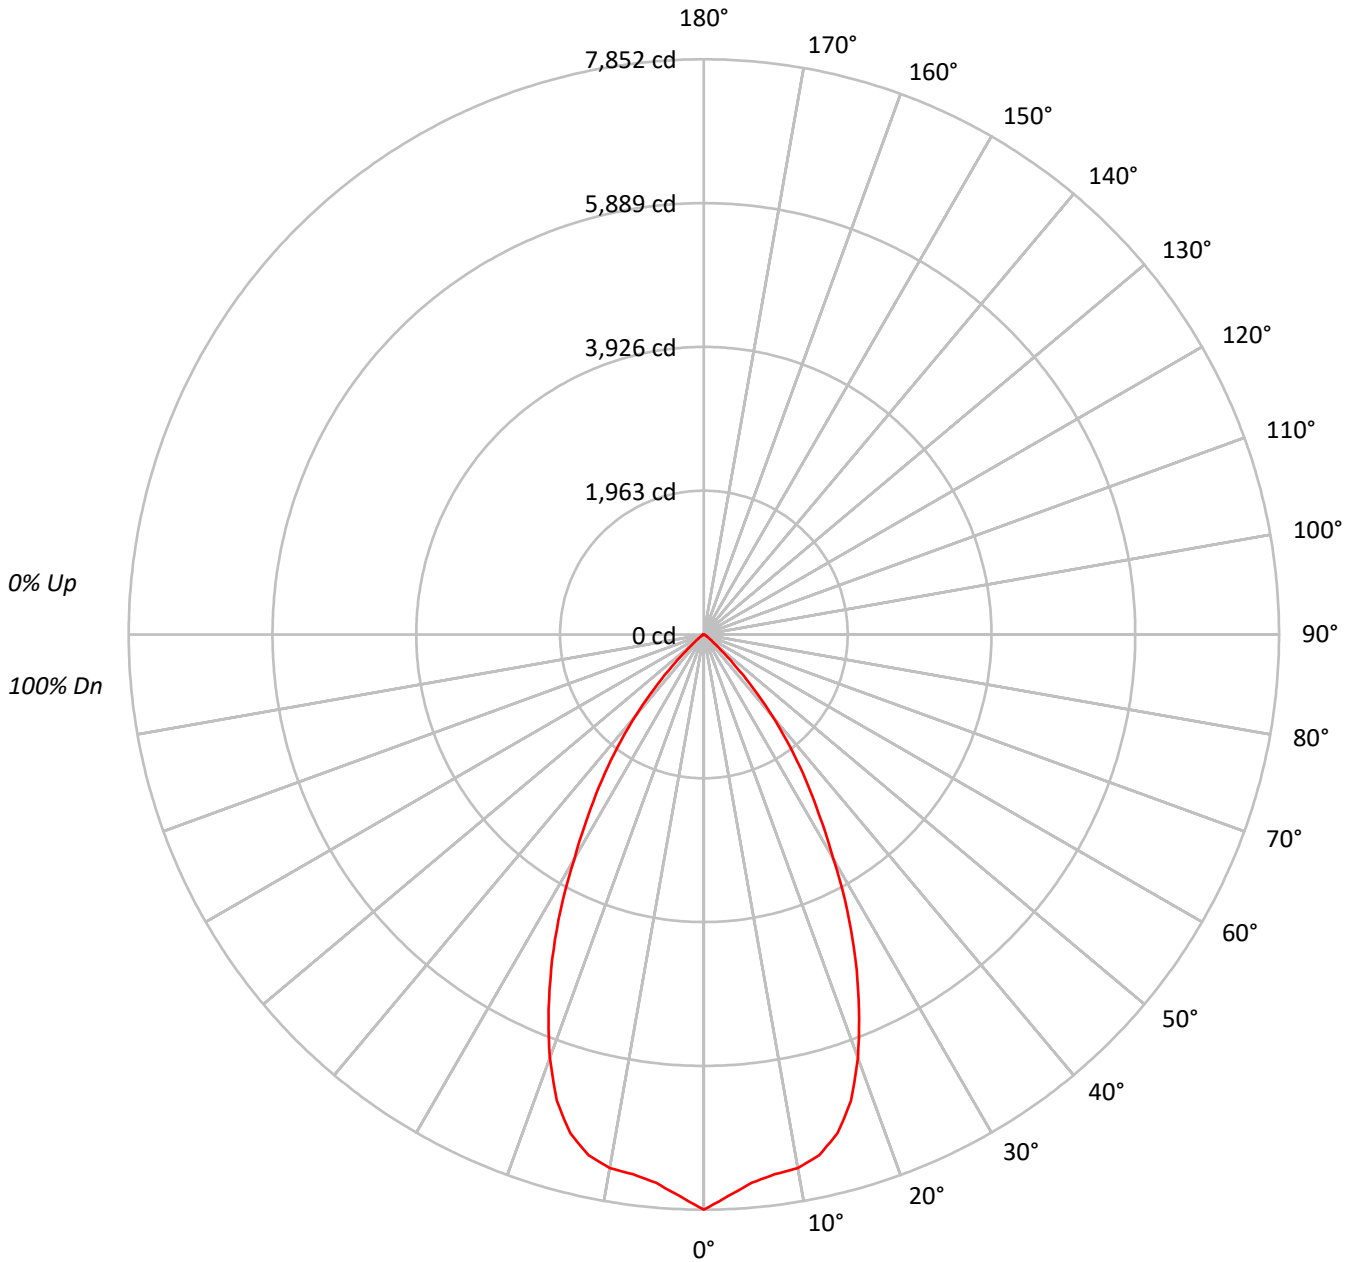



TEST NUMBER: P754160

CATALOG NUMBER: LD4D80BD010-EU4DR5570959024-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94		
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87		
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81		
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75		
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70		
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65		
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61		
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57		
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54		
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	857861
5°	823792
10°	820692
15°	797110
20°	714729
25°	590688
30°	446190
35°	323520
40°	207041
45°	94565
50°	30919
55°	13353
60°	5747
65°	750
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 94565 cd/sqm



TEST NUMBER: P754160

CATALOG NUMBER: LD4D80BD010-EU4DR5570959024-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	714.7	10.2
10°-20°	1950.6	27.9
20°-30°	2222.9	31.7
30°-40°	1513.2	21.6
40°-50°	521.4	7.4
50°-60°	72.1	1.0
60°-70°	7.0	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4888.2	69.8
0°-40°	6401.4	91.4
0°-60°	6995.0	99.9
0°-90°	7001.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7001.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7852	
5°	7511	715
15°	7047	1951
25°	4900	2223
35°	2426	1513
45°	612	521
55°	70	72
65°	3	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754160

CATALOG NUMBER: LD4D80BD010-EU4DR5570959024-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	7851.5
2.5°	7671.6
5°	7511.0
7.5°	7432.2
10°	7397.2
12.5°	7280.4
15°	7046.9
17.5°	6676.2
20°	6147.0
22.5°	5536.0
25°	4899.7
27.5°	4237.1
30°	3536.6
32.5°	2943.1
35°	2425.5
37.5°	1933.2
40°	1451.6
42.5°	1006.0
45°	612.0
47.5°	329.8
50°	181.9
52.5°	108.0
55°	70.1
57.5°	44.8
60°	26.3
62.5°	11.7
65°	2.9
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)