

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754028

Luminaire Tested: LD4D80BD010-EU4DR4570959030-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P754028
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D80BD010-EU4DR4570959030-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6871.1 lumens
Efficiency: N/A
Efficacy: 87.1 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P754028
CATALOG NUMBER: LD4D80BD010-EU4DR4570959030-4LBDP1B

Luminous Intensity Polar Plot

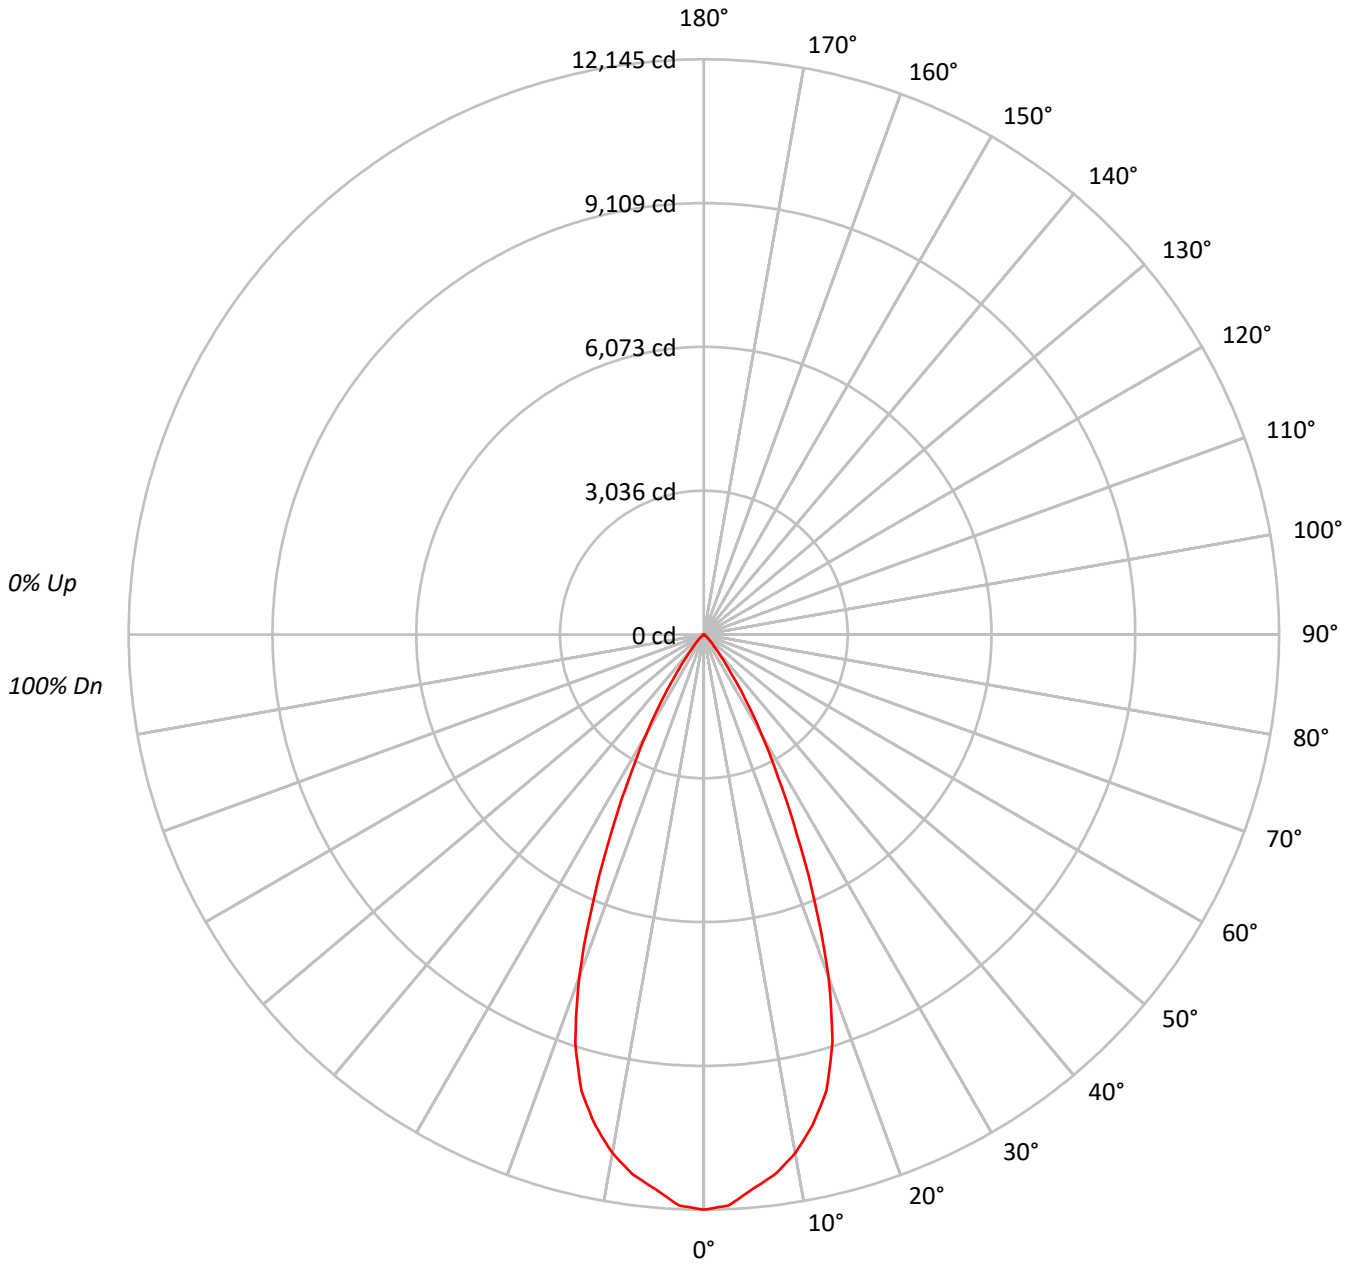



TEST NUMBER: P754028
 CATALOG NUMBER: LD4D80BD010-EU4DR4570959030-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95			95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90			90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85			85
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81			81
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77			77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73			73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69			69
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66			66
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63			63
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60			60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1326950
5°	1289168
10°	1233390
15°	1128809
20°	895534
25°	559090
30°	308154
35°	138371
40°	54499
45°	25681
50°	12171
55°	6362
60°	3125
65°	750
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25681 cd/sqm



TEST NUMBER: P754028

CATALOG NUMBER: LD4D80BD010-EU4DR4570959030-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1104.4	16.1
10°-20°	2718.1	39.6
20°-30°	2152.4	31.3
30°-40°	716.8	10.4
40°-50°	142.3	2.1
50°-60°	32.3	0.5
60°-70°	4.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5974.9	87.0
0°-40°	6691.7	97.4
0°-60°	6866.3	99.9
0°-90°	6871.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6871.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12145	
5°	11754	###
15°	9979	2718
25°	4638	2152
35°	1037	717
45°	166	142
55°	33	32
65°	3	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754028
CATALOG NUMBER: LD4D80BD010-EU4DR4570959030-4LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	12144.8
2.5°	12065.5
5°	11754.1
7.5°	11497.2
10°	11117.0
12.5°	10610.7
15°	9979.3
17.5°	9029.8
20°	7702.0
22.5°	6120.2
25°	4637.6
27.5°	3395.8
30°	2442.5
32.5°	1661.1
35°	1037.4
37.5°	615.2
40°	382.1
42.5°	251.2
45°	166.2
47.5°	107.0
50°	71.6
52.5°	47.8
55°	33.4
57.5°	22.0
60°	14.3
62.5°	7.6
65°	2.9
67.5°	1.0
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)