

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754343

Luminaire Tested: LD4D80BD010-EU4DR6570959030-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P754343
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D80BD010-EU4DR6570959030-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5753.7 lumens
Efficiency: N/A
Efficacy: 72.9 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P754343

CATALOG NUMBER: LD4D80BD010-EU4DR6570959030-4LBDP1MW

Luminous Intensity Polar Plot

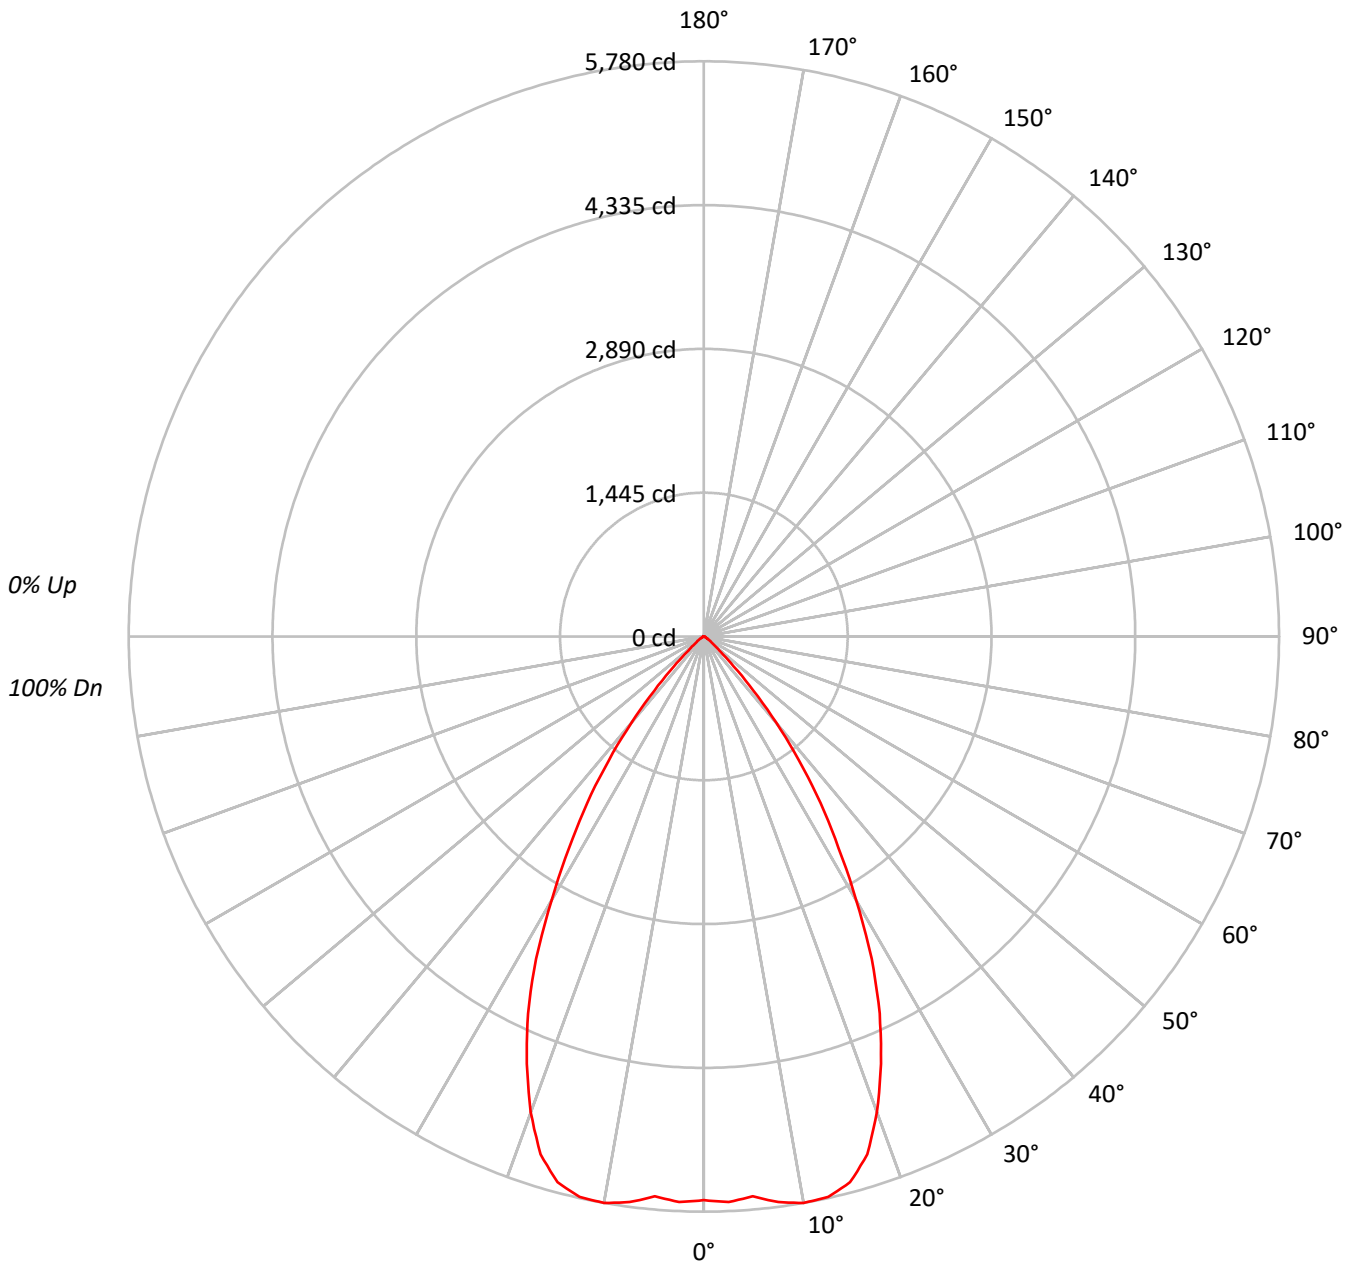



TEST NUMBER: P754343

CATALOG NUMBER: LD4D80BD010-EU4DR6570959030-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	618951
5°	619462
10°	641269
15°	642335
20°	591375
25°	503875
30°	385745
35°	272514
40°	160858
45°	65299
50°	23678
55°	13182
60°	7561
65°	4162
70°	4377
75°	3419
80°	3524
85°	3009

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 65299 cd/sqm



TEST NUMBER: P754343

CATALOG NUMBER: LD4D80BD010-EU4DR6570959030-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	545.5	9.5
10°-20°	1573.5	27.3
20°-30°	1887.9	32.8
30°-40°	1268.7	22.1
40°-50°	379.8	6.6
50°-60°	67.0	1.2
60°-70°	19.0	0.3
70°-80°	9.3	0.2
80°-90°	2.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4006.8	69.6
0°-40°	5275.5	91.7
0°-60°	5722.3	99.5
0°-90°	5753.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5753.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5665	
5°	5648	545
15°	5679	1573
25°	4180	1888
35°	2043	1269
45°	423	380
55°	69	67
65°	16	19
75°	8	9
85°	2	3
90°	0	



TEST NUMBER: P754343

CATALOG NUMBER: LD4D80BD010-EU4DR6570959030-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5664.9
2.5°	5689.1
5°	5648.0
7.5°	5733.3
10°	5780.0
12.5°	5768.8
15°	5678.6
17.5°	5458.0
20°	5086.1
22.5°	4648.2
25°	4179.6
27.5°	3650.8
30°	3057.5
32.5°	2519.7
35°	2043.1
37.5°	1572.2
40°	1127.8
42.5°	736.6
45°	422.6
47.5°	223.8
50°	139.3
52.5°	96.6
55°	69.2
57.5°	49.9
60°	34.6
62.5°	22.5
65°	16.1
67.5°	14.5
70°	13.7
72.5°	10.5
75°	8.1
77.5°	7.2
80°	5.6
82.5°	4.0
85°	2.4
87.5°	1.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)