

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754293

Luminaire Tested: LD4D80BD010-EU4DR6070959040-4LBS1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P754293
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-60)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D80BD010-EU4DR6070959040-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8497.9 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P754293

CATALOG NUMBER: LD4D80BD010-EU4DR6070959040-4LBS1H

Luminous Intensity Polar Plot

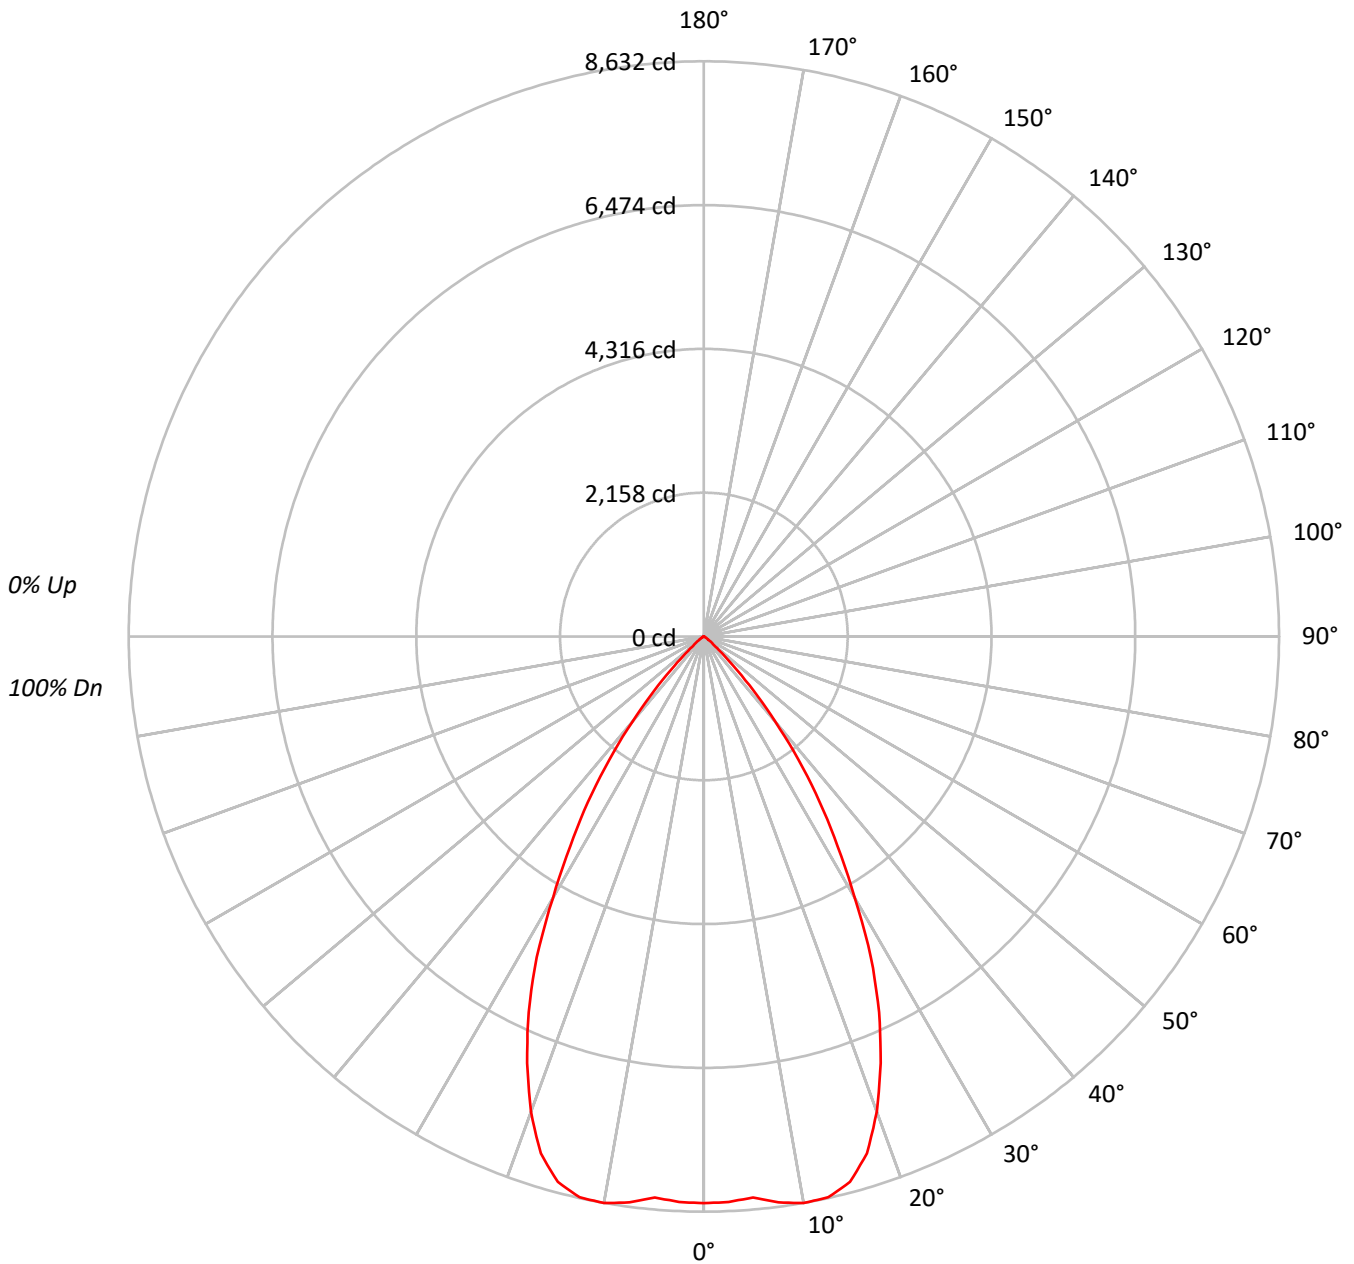



TEST NUMBER: P754293

CATALOG NUMBER: LD4D80BD010-EU4DR6070959040-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70
6	87	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	61	58	57
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	929175
5°	926901
10°	957688
15°	958673
20°	882092
25°	750280
30°	571684
35°	404270
40°	237393
45°	95786
50°	31990
55°	15392
60°	6315
65°	931
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 95786 cd/sqm



TEST NUMBER: P754293

CATALOG NUMBER: LD4D80BD010-EU4DR6070959040-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	815.2	9.6
10°-20°	2347.9	27.6
20°-30°	2810.2	33.1
30°-40°	1879.6	22.1
40°-50°	557.3	6.6
50°-60°	80.1	0.9
60°-70°	7.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5973.4	70.3
0°-40°	7852.9	92.4
0°-60°	8490.3	99.9
0°-90°	8497.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8497.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8504	
5°	8451	815
15°	8475	2348
25°	6224	2810
35°	3031	1880
45°	620	557
55°	81	80
65°	4	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754293

CATALOG NUMBER: LD4D80BD010-EU4DR6070959040-4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	8504.2
2.5°	8493.3
5°	8451.1
7.5°	8565.7
10°	8632.0
12.5°	8620.0
15°	8475.2
17.5°	8133.9
20°	7586.4
22.5°	6929.0
25°	6223.5
27.5°	5428.6
30°	4531.3
32.5°	3730.5
35°	3030.9
37.5°	2330.2
40°	1664.4
42.5°	1097.5
45°	619.9
47.5°	317.2
50°	188.2
52.5°	121.8
55°	80.8
57.5°	51.9
60°	28.9
62.5°	12.1
65°	3.6
67.5°	1.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)