

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754462

Luminaire Tested: LD4D80BD010-EU4DR7070959050-4LBS1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P754462  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D80BD010-EU4DR7070959050-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8614.8 lumens  
Efficiency: N/A  
Efficacy: 109.2 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 78.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P754462  
CATALOG NUMBER: LD4D80BD010-EU4DR7070959050-4LBS1H

### Luminous Intensity Polar Plot

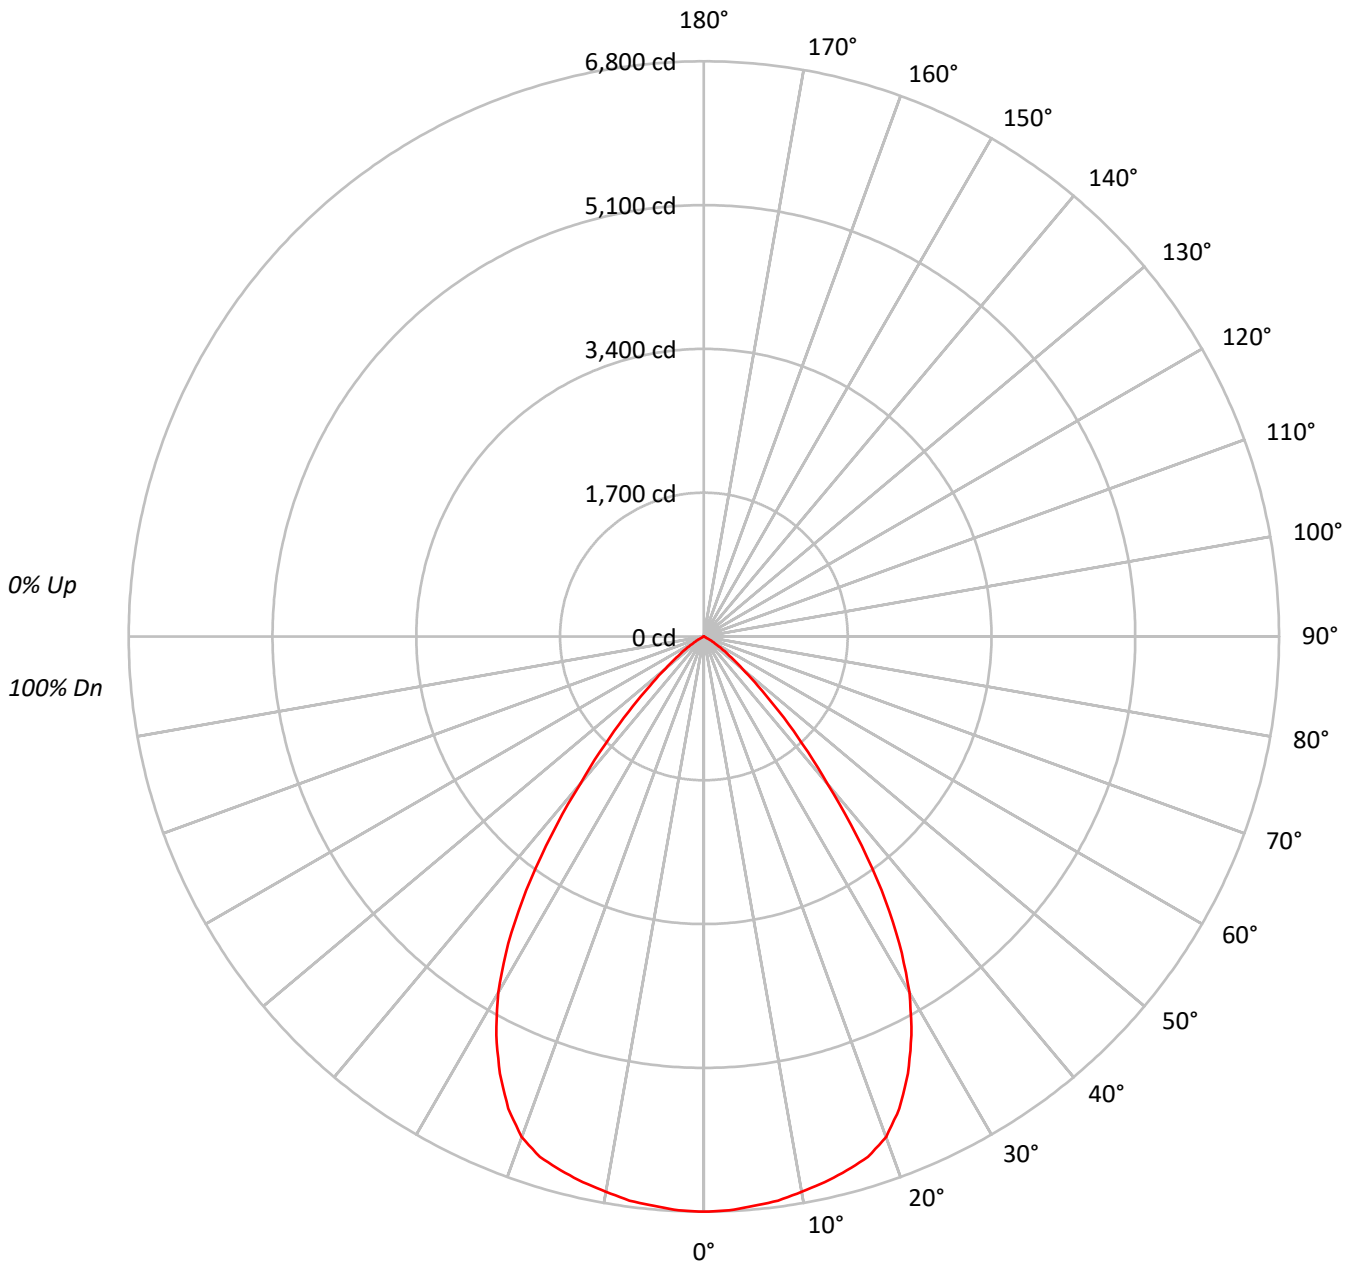



TEST NUMBER: P754462

CATALOG NUMBER: LD4D80BD010-EU4DR7070959050-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93						93													
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85						85													
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78						78													
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71						71													
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65						65													
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60						60													
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56						56													
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51						51													
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48						48													
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44						44													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	742918
5°	741062
10°	739457
15°	739252
20°	732031
25°	687651
30°	613041
35°	488781
40°	324554
45°	194028
50°	100594
55°	52880
60°	18705
65°	310
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 194028 cd/sqm



TEST NUMBER: P754462

CATALOG NUMBER: LD4D80BD010-EU4DR7070959050-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	642.6	7.5
10°-20°	1842.9	21.4
20°-30°	2599.8	30.2
30°-40°	2244.3	26.1
40°-50°	1005.0	11.7
50°-60°	263.1	3.1
60°-70°	17.1	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5085.2	59.0
0°-40°	7329.5	85.1
0°-60°	8597.7	99.8
0°-90°	8614.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8614.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6800	
5°	6757	643
15°	6535	1843
25°	5704	2600
35°	3664	2244
45°	1256	1005
55°	278	263
65°	1	17
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754462

CATALOG NUMBER: LD4D80BD010-EU4DR7070959050-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6799.5
2.5°	6792.2
5°	6756.7
7.5°	6727.4
10°	6665.0
12.5°	6608.8
15°	6535.4
17.5°	6451.0
20°	6295.8
22.5°	6040.2
25°	5704.0
27.5°	5313.9
30°	4859.1
32.5°	4302.7
35°	3664.5
37.5°	2960.2
40°	2275.5
42.5°	1728.9
45°	1255.7
47.5°	865.7
50°	591.8
52.5°	408.4
55°	277.6
57.5°	167.5
60°	85.6
62.5°	26.9
65°	1.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)