

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754786

Luminaire Tested: LD4D85BD010-EU4DR4570959024-4LBS1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P754786
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D85BD010-EU4DR4570959024-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7009.5 lumens
Efficiency: N/A
Efficacy: 79.9 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 87.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P754786
CATALOG NUMBER: LD4D85BD010-EU4DR4570959024-4LBS1B

Luminous Intensity Polar Plot

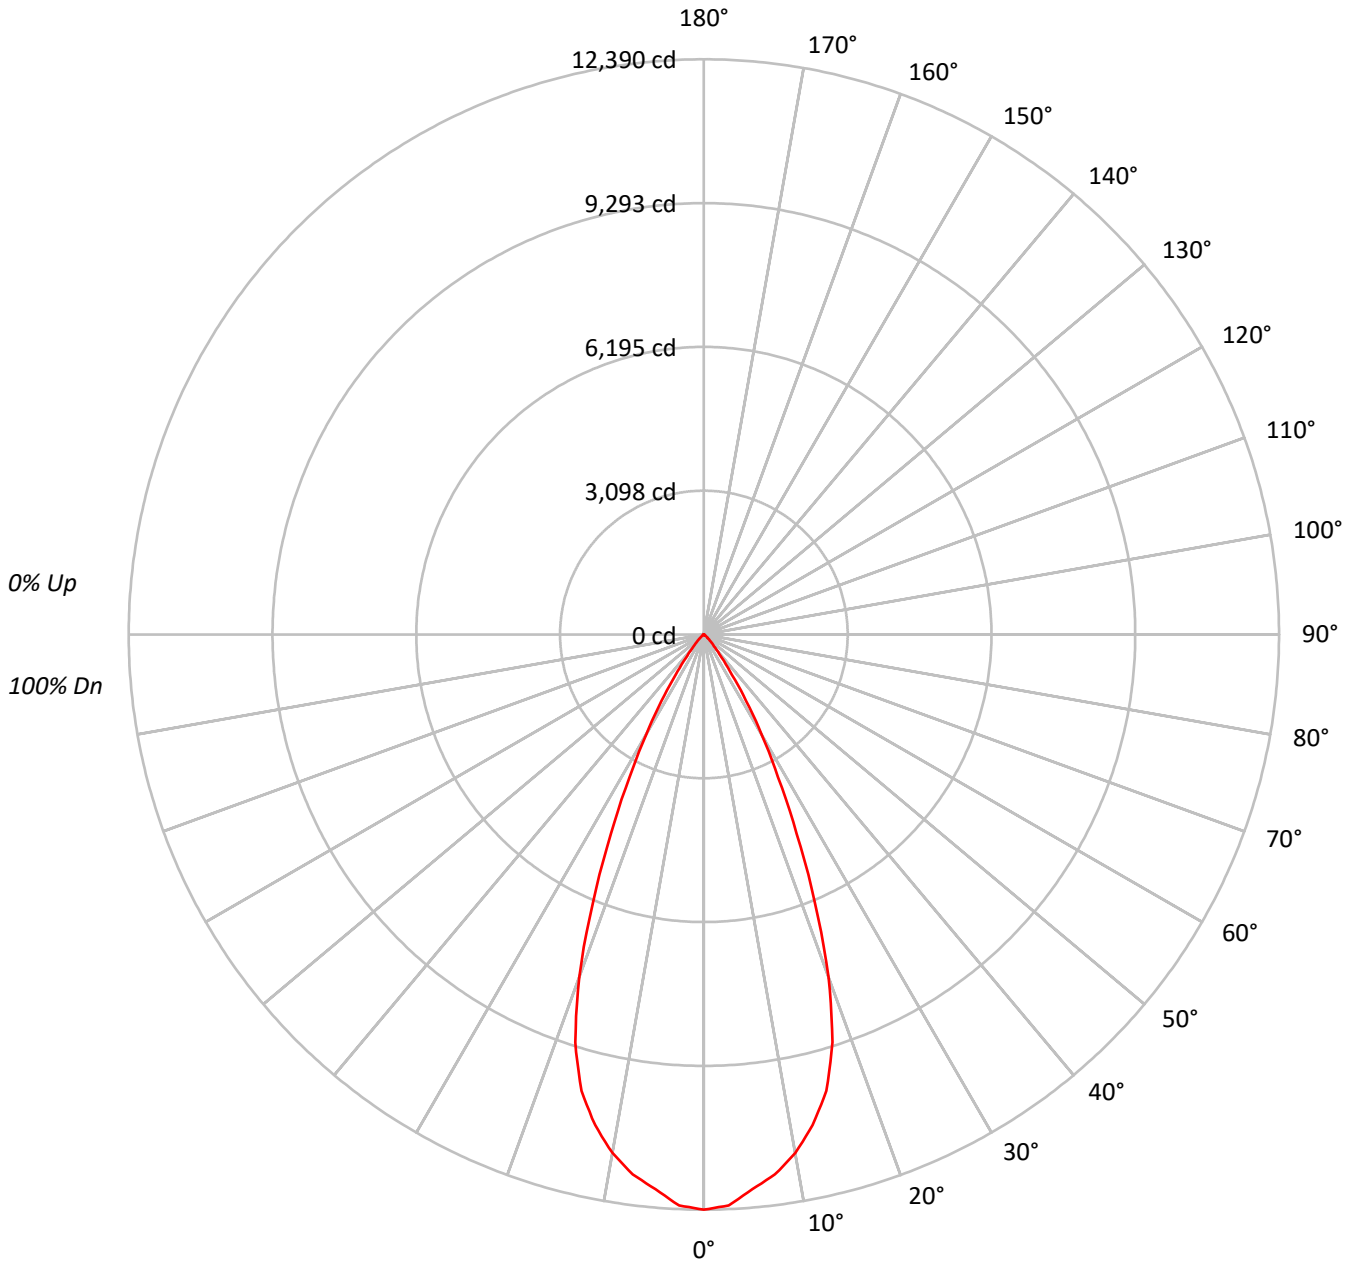



TEST NUMBER: P754786

CATALOG NUMBER: LD4D85BD010-EU4DR4570959024-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95				95															
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90				90															
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85				85															
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81				81															
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77				77															
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73				73															
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69				69															
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66				66															
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63				63															
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60				60															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1353686
5°	1315150
10°	1258242
15°	1151557
20°	913579
25°	570362
30°	314361
35°	141159
40°	55597
45°	26206
50°	12426
55°	6496
60°	3190
65°	750
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 26206 cd/sqm



TEST NUMBER: P754786

CATALOG NUMBER: LD4D85BD010-EU4DR4570959024-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1126.7	16.1
10°-20°	2772.9	39.6
20°-30°	2195.8	31.3
30°-40°	731.2	10.4
40°-50°	145.1	2.1
50°-60°	32.9	0.5
60°-70°	4.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6095.3	87.0
0°-40°	6826.6	97.4
0°-60°	7004.7	99.9
0°-90°	7009.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7009.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12390	
5°	11991	###
15°	10180	2773
25°	4731	2196
35°	1058	731
45°	170	145
55°	34	33
65°	3	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754786

CATALOG NUMBER: LD4D85BD010-EU4DR4570959024-4LBS1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	12389.5
2.5°	12308.6
5°	11991.0
7.5°	11728.8
10°	11341.0
12.5°	10824.5
15°	10180.4
17.5°	9211.7
20°	7857.2
22.5°	6243.5
25°	4731.1
27.5°	3464.3
30°	2491.7
32.5°	1694.6
35°	1058.3
37.5°	627.6
40°	389.8
42.5°	256.3
45°	169.6
47.5°	109.1
50°	73.1
52.5°	48.7
55°	34.1
57.5°	22.4
60°	14.6
62.5°	7.8
65°	2.9
67.5°	1.0
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)