

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754641

Luminaire Tested: LD4D85BD010-EU4DR3570959027-4LBDP1LI

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P754641  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D85BD010-EU4DR3570959027-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7887.2 lumens  
Efficiency: N/A  
Efficacy: 89.9 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P754641

CATALOG NUMBER: LD4D85BD010-EU4DR3570959027-4LBDP1LI

### Luminous Intensity Polar Plot

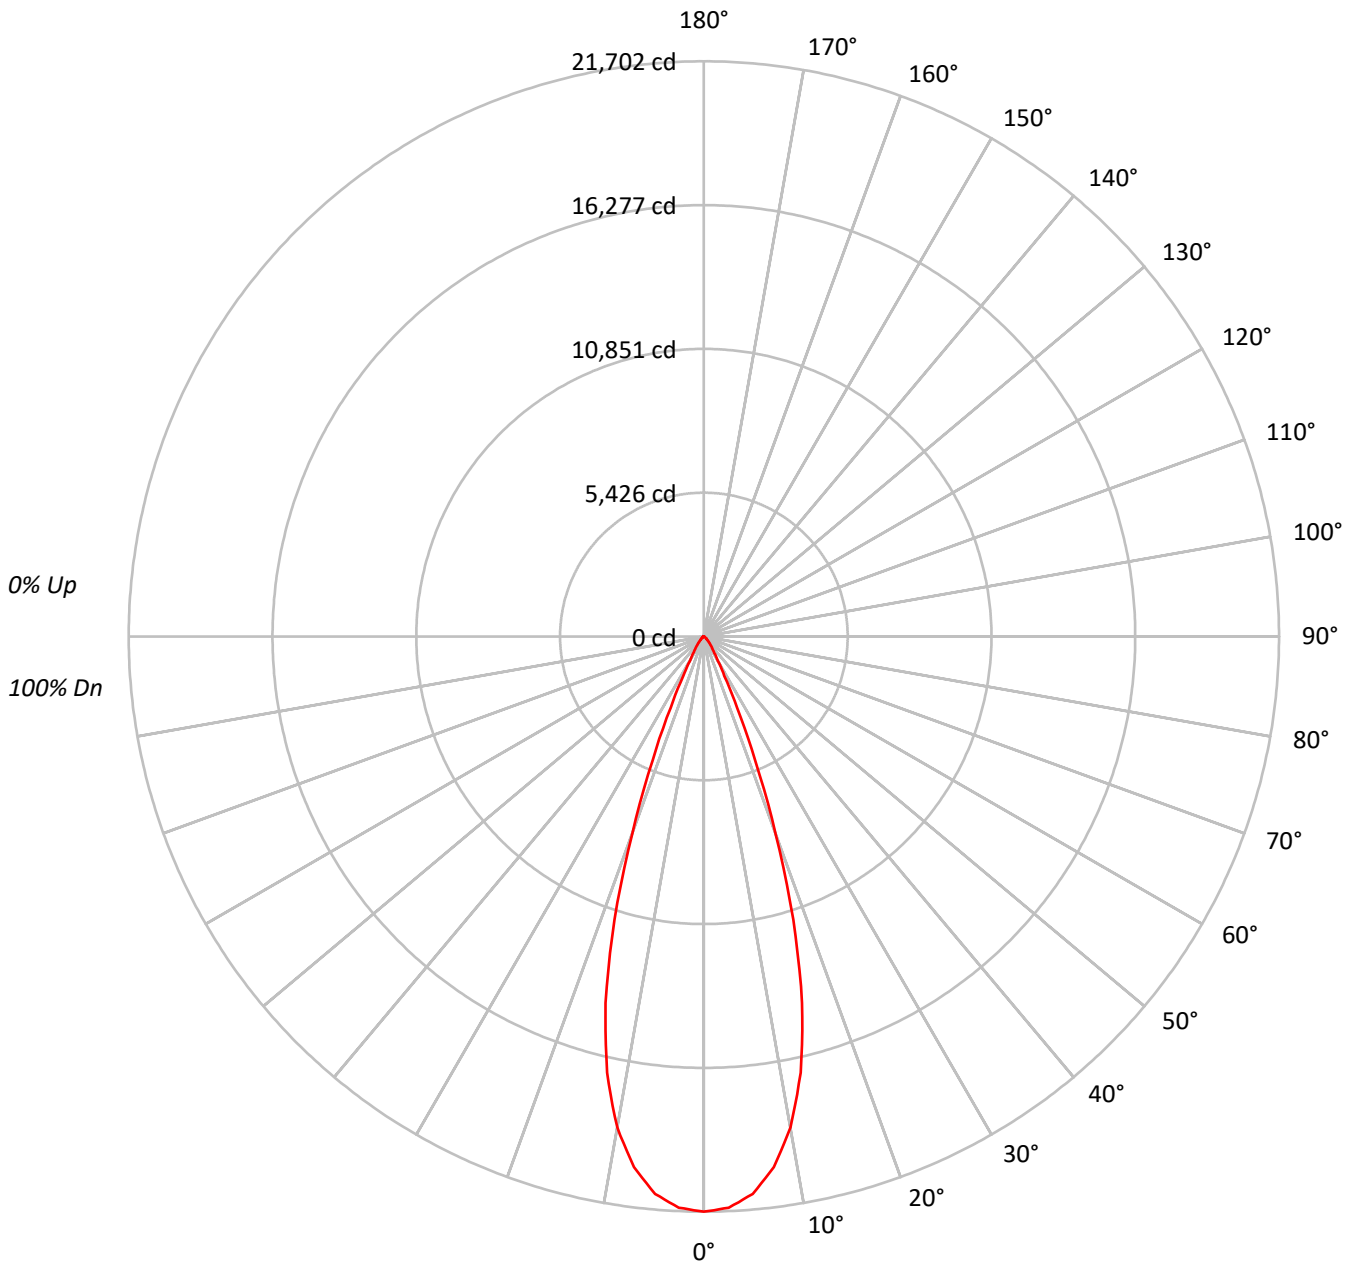



TEST NUMBER: P754641

CATALOG NUMBER: LD4D85BD010-EU4DR3570959027-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2371133
5°	2315415
10°	2086800
15°	1619694
20°	918672
25°	357400
30°	133342
35°	73094
40°	47767
45°	29080
50°	18511
55°	13068
60°	9571
65°	5197
70°	383
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 29080 cd/sqm



TEST NUMBER: P754641

CATALOG NUMBER: LD4D85BD010-EU4DR3570959027-4LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1941.6	24.6
10°-20°	3790.8	48.1
20°-30°	1546.0	19.6
30°-40°	370.0	4.7
40°-50°	154.2	2.0
50°-60°	63.8	0.8
60°-70°	20.0	0.3
70°-80°	0.5	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7278.5	92.3
0°-40°	7648.4	97.0
0°-60°	7866.4	99.7
0°-90°	7887.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7887.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	21702	
5°	21111	###
15°	14319	3791
25°	2965	1546
35°	548	370
45°	188	154
55°	69	64
65°	20	20
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754641

CATALOG NUMBER: LD4D85BD010-EU4DR3570959027-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	21701.6
2.5°	21571.4
5°	21111.0
7.5°	20192.6
10°	18809.1
12.5°	16861.1
15°	14319.0
17.5°	11210.0
20°	7901.0
22.5°	5038.1
25°	2964.6
27.5°	1675.8
30°	1056.9
32.5°	742.0
35°	548.0
37.5°	423.7
40°	334.9
42.5°	258.0
45°	188.2
47.5°	140.8
50°	108.9
52.5°	86.4
55°	68.6
57.5°	55.6
60°	43.8
62.5°	32.0
65°	20.1
67.5°	7.1
70°	1.2
72.5°	1.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.2
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)