

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754587

Luminaire Tested: LD4D85BD010-EU4DR3070959035-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P754587
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D85BD010-EU4DR3070959035-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6436.8 lumens
Efficiency: N/A
Efficacy: 73.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 87.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P754587
CATALOG NUMBER: LD4D85BD010-EU4DR3070959035-4LBDP1B

Luminous Intensity Polar Plot

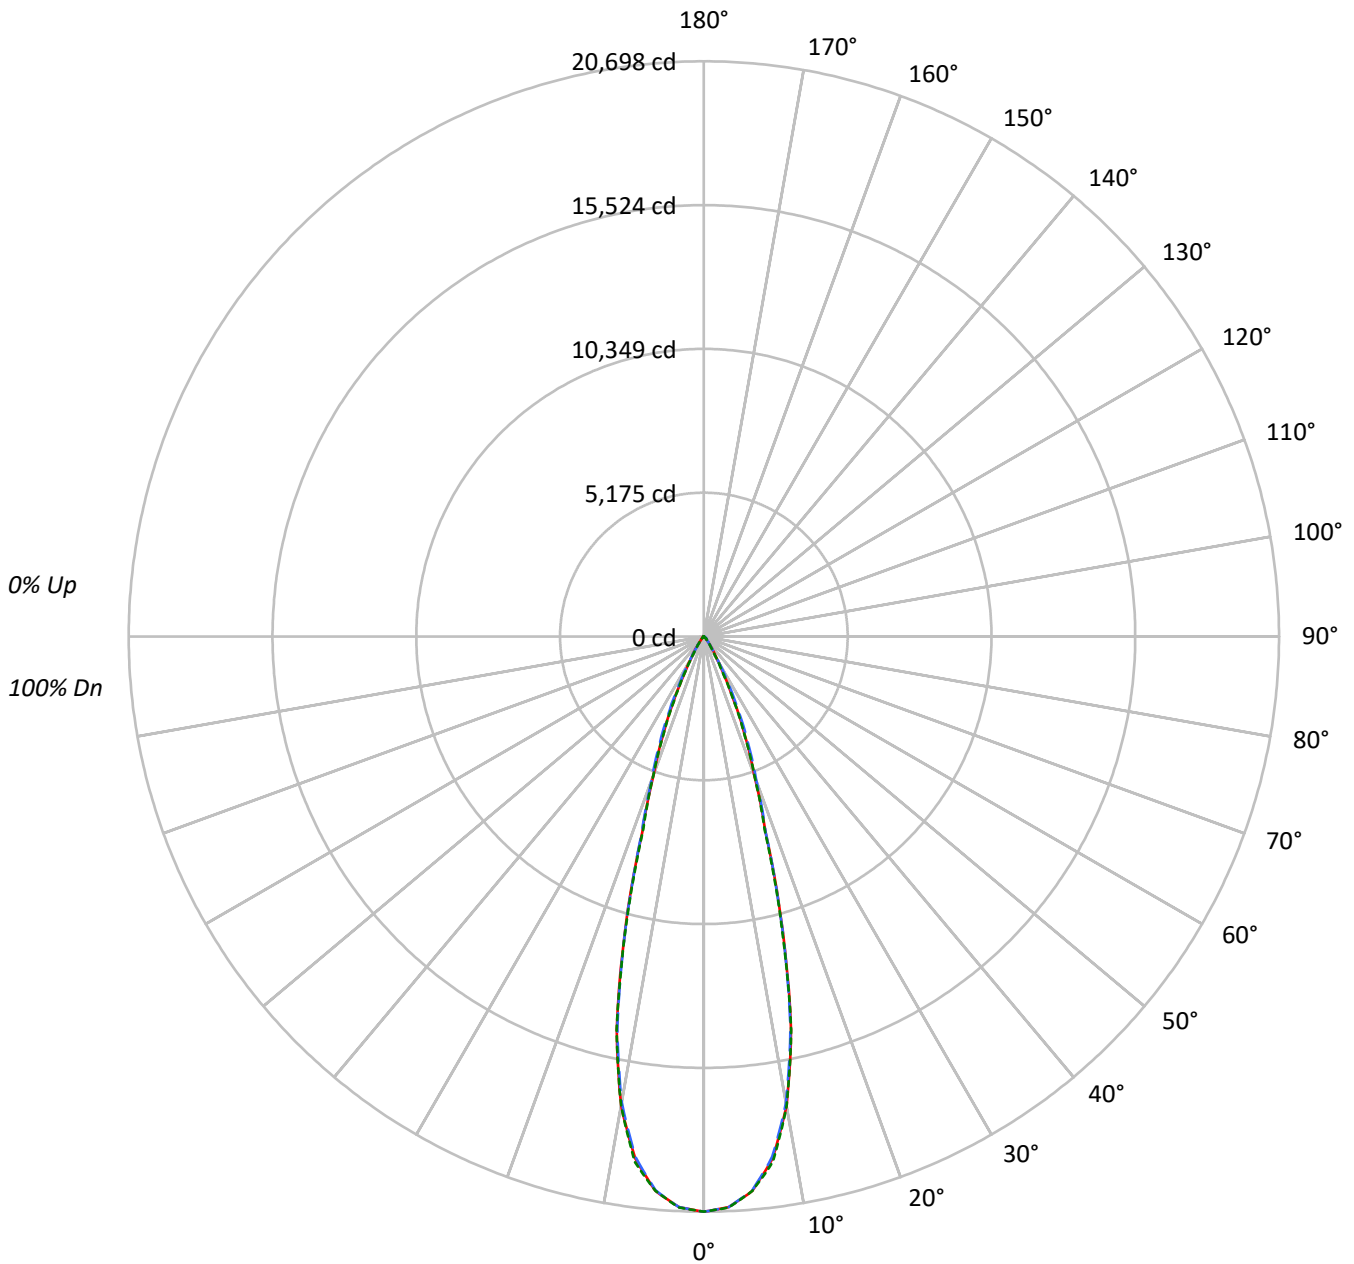



TEST NUMBER: P754587

CATALOG NUMBER: LD4D85BD010-EU4DR3070959035-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1584257	1584257	1584257
5°	1538775	1536977	1538852
10°	1332815	1323418	1332496
15°	869595	864928	860577
20°	432408	448634	431830
25°	217821	245624	213353
30°	87209	95022	75984
35°	40451	38741	32471
40°	17466	19395	16447
45°	12319	15285	12427
50°	4239	11134	4477
55°	2442	4604	2576
60°	1715	2021	1715
65°	1105	1105	1105
70°	671	448	671
75°	0	296	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 15285 cd/sqm



TEST NUMBER: P754587

CATALOG NUMBER: LD4D85BD010-EU4DR3070959035-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1820.0	28.3
10°-20°	2931.2	45.5
20°-30°	1266.6	19.7
30°-40°	288.7	4.5
40°-50°	99.1	1.5
50°-60°	24.2	0.4
60°-70°	6.3	0.1
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6017.8	93.5
0°-40°	6306.5	98.0
0°-60°	6429.9	99.9
0°-90°	6436.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6436.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	20698	20698	20698	20698	20698	
5°	20027	20008	20003	20045	20028	1822
15°	10974	10842	10915	10879	10860	2938
25°	2579	2677	2908	2608	2526	1235
35°	433	442	415	412	348	294
45°	114	141	141	141	115	81
55°	18	19	34	20	19	18
65°	6	6	6	6	6	6
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P754587

CATALOG NUMBER: LD4D85BD010-EU4DR3070959035-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	20697.5	20697.5	20697.5	20697.5	20697.5
2.5°	20560.3	20546.1	20554.2	20564.4	20568.4
5°	20026.8	20007.5	20003.4	20045.1	20027.8
7.5°	18950.7	18923.2	18881.6	18976.1	19064.5
10°	17148.0	17117.5	17027.1	17071.8	17143.9
12.5°	14486.6	14388.0	14386.0	14528.3	14509.0
15°	10973.7	10841.6	10914.8	10879.2	10859.9
17.5°	7379.5	7328.7	7426.2	7396.7	7269.7
20°	5308.5	5321.7	5507.7	5414.2	5301.4
22.5°	3873.7	3921.4	4141.9	3901.1	3812.7
25°	2579.1	2676.6	2908.3	2608.5	2526.2
27.5°	1586.3	1631.0	1865.7	1565.9	1521.2
30°	986.7	964.4	1075.1	922.7	859.7
32.5°	647.3	618.9	654.4	587.3	536.5
35°	432.9	442.0	414.6	411.6	347.5
37.5°	270.3	310.9	274.4	292.7	223.6
40°	174.8	225.6	194.1	214.4	164.6
42.5°	143.3	173.8	159.5	169.7	146.3
45°	113.8	141.2	141.2	141.2	114.8
47.5°	63.0	94.5	120.9	96.5	67.1
50°	35.6	47.8	93.5	49.8	37.6
52.5°	24.4	27.4	64.0	28.5	25.4
55°	18.3	19.3	34.5	20.3	19.3
57.5°	14.2	15.2	18.3	15.2	14.2
60°	11.2	11.2	13.2	12.2	11.2
62.5°	8.1	8.1	9.1	8.1	8.1
65°	6.1	6.1	6.1	6.1	6.1
67.5°	3.0	4.1	4.1	4.1	4.1
70°	3.0	2.0	2.0	2.0	3.0
72.5°	2.0	1.0	1.0	1.0	1.0
75°	0.0	0.0	1.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)