

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755055

Luminaire Tested: LD4D85BD010-EU4DR6070959035-4LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P755055  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D85BD010-EU4DR6070959035-4LBDP1B  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6465.6 lumens  
Efficiency: N/A  
Efficacy: 73.7 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P755055  
CATALOG NUMBER: LD4D85BD010-EU4DR6070959035-4LBDP1B

### Luminous Intensity Polar Plot

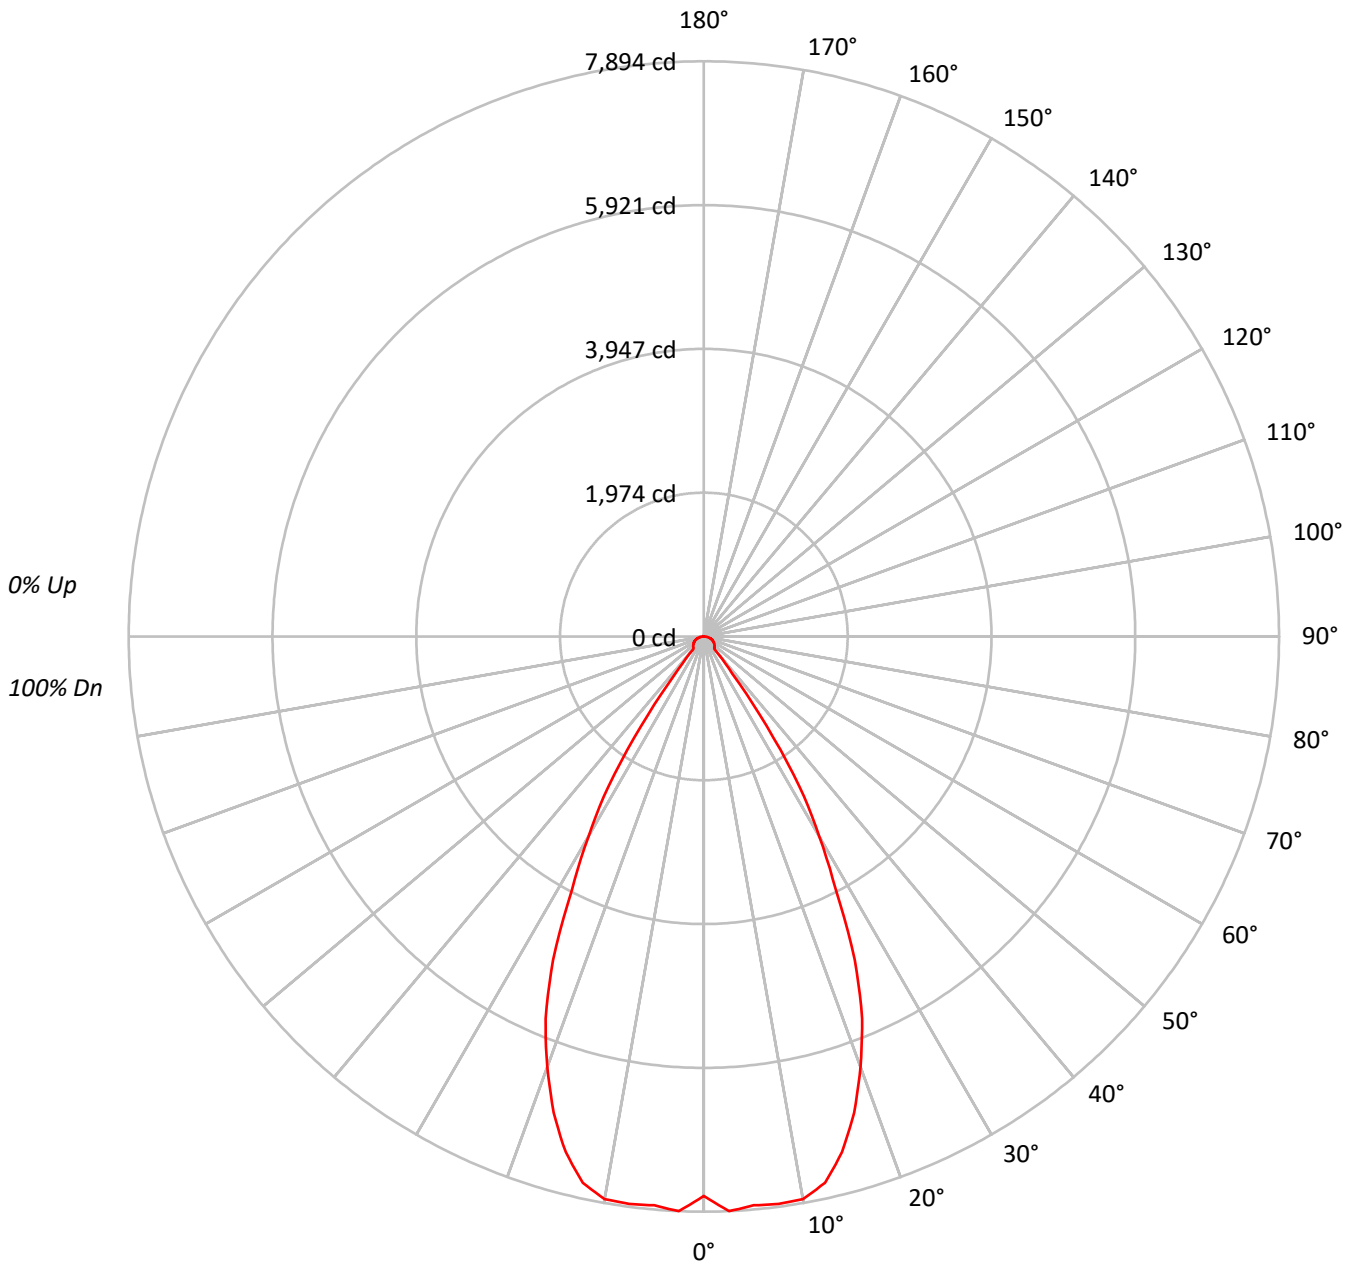



TEST NUMBER: P755055

CATALOG NUMBER: LD4D85BD010-EU4DR6070959035-4LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86		
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70		
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66		
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62		
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59		
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	838981
5°	859602
10°	869985
15°	828783
20°	730728
25°	591037
30°	399787
35°	200341
40°	32491
45°	31815
50°	32449
55°	32936
60°	33849
65°	34618
70°	35428
75°	35841
80°	34606
85°	28833

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 35841 cd/sqm



TEST NUMBER: P755055

CATALOG NUMBER: LD4D85BD010-EU4DR6070959035-4LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	749.1	11.6
10°-20°	2026.7	31.3
20°-30°	2180.5	33.7
30°-40°	947.8	14.7
40°-50°	159.2	2.5
50°-60°	154.8	2.4
60°-70°	132.4	2.0
70°-80°	88.6	1.4
80°-90°	26.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4956.2	76.7
0°-40°	5904.1	91.3
0°-60°	6218.1	96.2
0°-90°	6465.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6465.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7679	
5°	7838	749
15°	7327	2027
25°	4903	2181
35°	1502	948
45°	206	159
55°	173	155
65°	134	132
75°	85	89
85°	23	27
90°	0	



TEST NUMBER: P755055

CATALOG NUMBER: LD4D85BD010-EU4DR6070959035-4LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7678.7
2.5°	7894.5
5°	7837.5
7.5°	7855.5
10°	7841.5
12.5°	7679.7
15°	7326.9
17.5°	6853.2
20°	6284.6
22.5°	5676.0
25°	4902.6
27.5°	3921.3
30°	3168.8
32.5°	2442.3
35°	1502.0
37.5°	642.6
40°	227.8
42.5°	209.9
45°	205.9
47.5°	198.9
50°	190.9
52.5°	181.9
55°	172.9
57.5°	163.9
60°	154.9
62.5°	144.9
65°	133.9
67.5°	122.9
70°	110.9
72.5°	97.9
75°	84.9
77.5°	70.0
80°	55.0
82.5°	39.0
85°	23.0
87.5°	8.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)