

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754839

Luminaire Tested: LD4D85BD010-EU4DR4570959040-4LBS1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P754839  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D85BD010-EU4DR4570959040-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9239.5 lumens  
Efficiency: N/A  
Efficacy: 105.4 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P754839  
CATALOG NUMBER: LD4D85BD010-EU4DR4570959040-4LBS1H

### Luminous Intensity Polar Plot

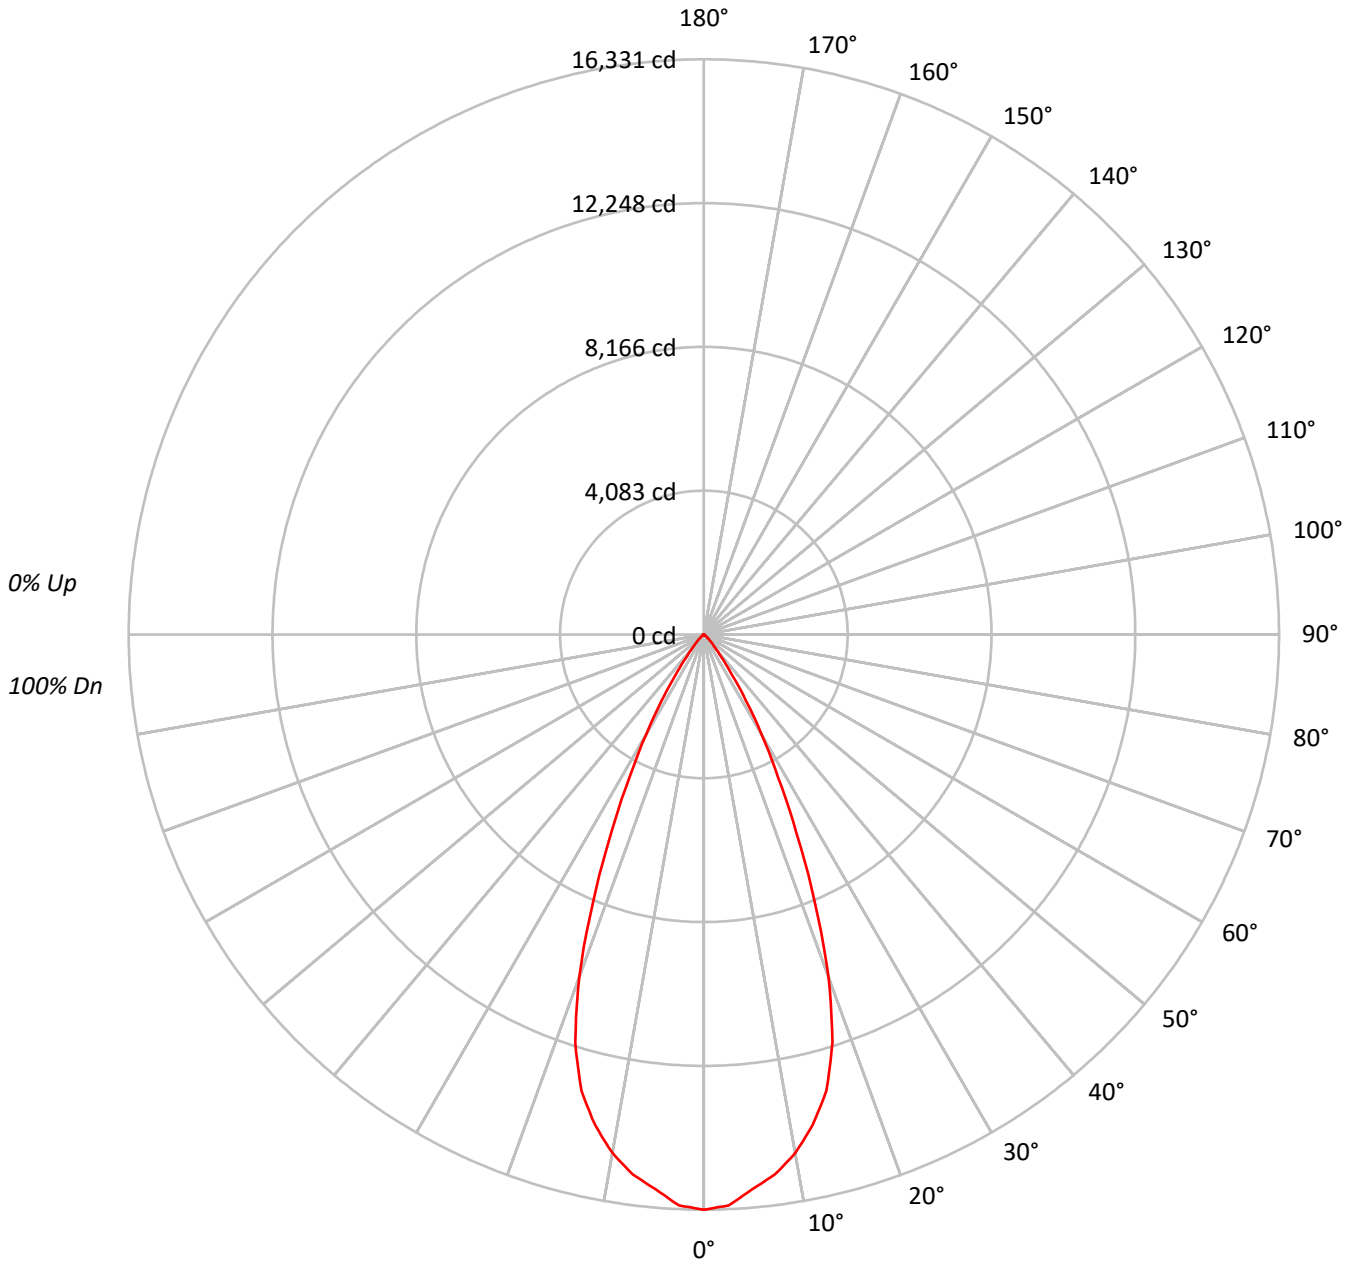



TEST NUMBER: P754839

CATALOG NUMBER: LD4D85BD010-EU4DR4570959040-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95			
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85			
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77			
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73			
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69			
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66			
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63			
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1784337
5°	1733528
10°	1658525
15°	1517891
20°	1204215
25°	751811
30°	414371
35°	186069
40°	73283
45°	34535
50°	16369
55°	8572
60°	4217
65°	1008
70°	415
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 34535 cd/sqm



TEST NUMBER: P754839

CATALOG NUMBER: LD4D85BD010-EU4DR4570959040-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1485.1	16.1
10°-20°	3655.0	39.6
20°-30°	2894.4	31.3
30°-40°	963.9	10.4
40°-50°	191.3	2.1
50°-60°	43.4	0.5
60°-70°	6.3	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8034.4	87.0
0°-40°	8998.3	97.4
0°-60°	9233.0	99.9
0°-90°	9239.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9239.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	16331	
5°	15806	###
15°	13419	3655
25°	6236	2894
35°	1395	964
45°	224	191
55°	45	43
65°	4	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754839

CATALOG NUMBER: LD4D85BD010-EU4DR4570959040-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	16331.0
2.5°	16224.3
5°	15805.6
7.5°	15460.1
10°	14948.9
12.5°	14268.1
15°	13419.0
17.5°	12142.2
20°	10356.8
22.5°	8229.7
25°	6236.2
27.5°	4566.3
30°	3284.4
32.5°	2233.7
35°	1395.0
37.5°	827.2
40°	513.8
42.5°	337.8
45°	223.5
47.5°	143.9
50°	96.3
52.5°	64.2
55°	45.0
57.5°	29.5
60°	19.3
62.5°	10.3
65°	3.9
67.5°	1.3
70°	1.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)