

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755152

Luminaire Tested: LD4D85BD010-EU4DR6570959040-4LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P755152  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D85BD010-EU4DR6570959040-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8299.9 lumens  
Efficiency: N/A  
Efficacy: 94.6 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P755152

CATALOG NUMBER: LD4D85BD010-EU4DR6570959040-4LBS1LI

### Luminous Intensity Polar Plot

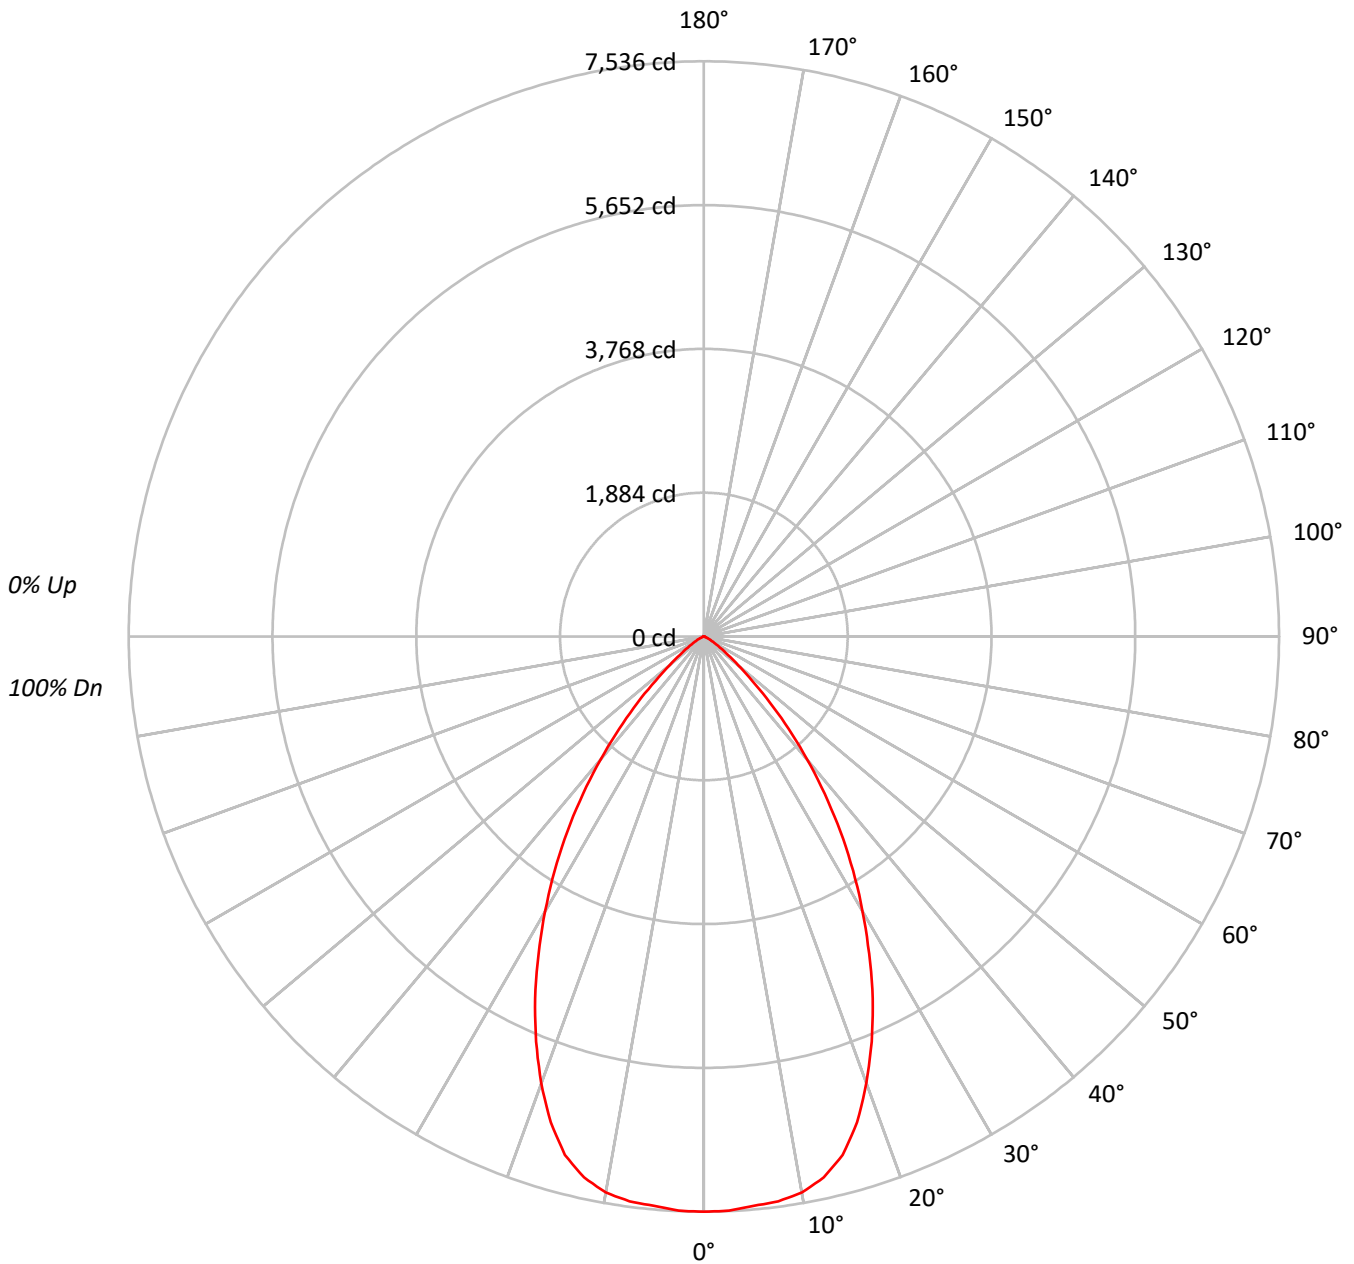



TEST NUMBER: P755152

CATALOG NUMBER: LD4D85BD010-EU4DR6570959040-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |     |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |     |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 95  | 94  | 93  |    |    | 93  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 107 | 102 | 97  | 94  | 105 | 100 | 96  | 92  | 97  | 93  | 90  | 94  | 91  | 88  | 91  | 89  | 87  | 85  |    |    | 85  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 101 | 94  | 88  | 84  | 99  | 92  | 87  | 83  | 90  | 86  | 82  | 87  | 84  | 81  | 85  | 82  | 80  | 78  |    |    | 78  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 95  | 87  | 81  | 76  | 93  | 86  | 80  | 76  | 84  | 79  | 75  | 82  | 77  | 74  | 80  | 76  | 73  | 72  |    |    | 72  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 90  | 81  | 74  | 70  | 88  | 80  | 74  | 69  | 78  | 73  | 69  | 76  | 72  | 68  | 75  | 71  | 68  | 66  |    |    | 66  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 85  | 75  | 69  | 64  | 83  | 74  | 68  | 64  | 73  | 67  | 63  | 71  | 67  | 63  | 70  | 66  | 62  | 61  |    |    | 61  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 80  | 70  | 64  | 59  | 79  | 69  | 63  | 59  | 68  | 63  | 59  | 67  | 62  | 58  | 66  | 61  | 58  | 56  |    |    | 56  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 76  | 66  | 59  | 55  | 75  | 65  | 59  | 55  | 64  | 58  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 52  |    |    | 52  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 72  | 61  | 55  | 51  | 71  | 61  | 55  | 51  | 60  | 54  | 51  | 59  | 54  | 50  | 58  | 54  | 50  | 49  |    |    | 49  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 68  | 58  | 52  | 47  | 67  | 57  | 51  | 47  | 57  | 51  | 47  | 56  | 51  | 47  | 55  | 50  | 47  | 46  |    |    | 46  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°     |
|-----|--------|
| 0°  | 440137 |
| 5°  | 439028 |
| 10° | 438654 |
| 15° | 425129 |
| 20° | 387027 |
| 25° | 337274 |
| 30° | 280512 |
| 35° | 222264 |
| 40° | 160418 |
| 45° | 101345 |
| 50° | 52826  |
| 55° | 28083  |
| 60° | 14741  |
| 65° | 8112   |
| 70° | 3398   |
| 75° | 3746   |
| 80° | 2623   |
| 85° | 2211   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 101345 cd/sqm



TEST NUMBER: P755152

CATALOG NUMBER: LD4D85BD010-EU4DR6570959040-4LBS1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 712.7  | 8.6       |
| 10°-20°   | 1951.6 | 23.5      |
| 20°-30°   | 2385.5 | 28.7      |
| 30°-40°   | 1935.5 | 23.3      |
| 40°-50°   | 964.5  | 11.6      |
| 50°-60°   | 269.0  | 3.2       |
| 60°-70°   | 61.1   | 0.7       |
| 70°-80°   | 15.9   | 0.2       |
| 80°-90°   | 4.1    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 5049.8 | 60.8      |
| 0°-40°    | 6985.3 | 84.2      |
| 0°-60°    | 8218.8 | 99.0      |
| 0°-90°    | 8299.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 8299.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 7536 |      |
| 5°  | 7488 | 713  |
| 15° | 7031 | 1952 |
| 25° | 5234 | 2386 |
| 35° | 3117 | 1936 |
| 45° | 1227 | 964  |
| 55° | 276  | 269  |
| 65° | 59   | 61   |
| 75° | 17   | 16   |
| 85° | 3    | 4    |
| 90° | 0    |      |



TEST NUMBER: P755152

CATALOG NUMBER: LD4D85BD010-EU4DR6570959040-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 7536.1 |
| 2.5°  | 7530.6 |
| 5°    | 7488.5 |
| 7.5°  | 7464.1 |
| 10°   | 7396.6 |
| 12.5° | 7259.3 |
| 15°   | 7031.1 |
| 17.5° | 6674.5 |
| 20°   | 6227.1 |
| 22.5° | 5744.3 |
| 25°   | 5233.8 |
| 27.5° | 4687.8 |
| 30°   | 4159.5 |
| 32.5° | 3637.9 |
| 35°   | 3117.4 |
| 37.5° | 2598.1 |
| 40°   | 2104.1 |
| 42.5° | 1641.2 |
| 45°   | 1227.0 |
| 47.5° | 854.9  |
| 50°   | 581.4  |
| 52.5° | 400.9  |
| 55°   | 275.8  |
| 57.5° | 186.0  |
| 60°   | 126.2  |
| 62.5° | 87.5   |
| 65°   | 58.7   |
| 67.5° | 29.9   |
| 70°   | 19.9   |
| 72.5° | 18.8   |
| 75°   | 16.6   |
| 77.5° | 11.1   |
| 80°   | 7.8    |
| 82.5° | 5.5    |
| 85°   | 3.3    |
| 87.5° | 2.2    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)