

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755081

Luminaire Tested: LD4D85BD010-EU4DR6070959050-4LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P755081  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D85BD010-EU4DR6070959050-4LBDP1B  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6816.1 lumens  
Efficiency: N/A  
Efficacy: 77.7 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P755081  
CATALOG NUMBER: LD4D85BD010-EU4DR6070959050-4LBDP1B

### Luminous Intensity Polar Plot

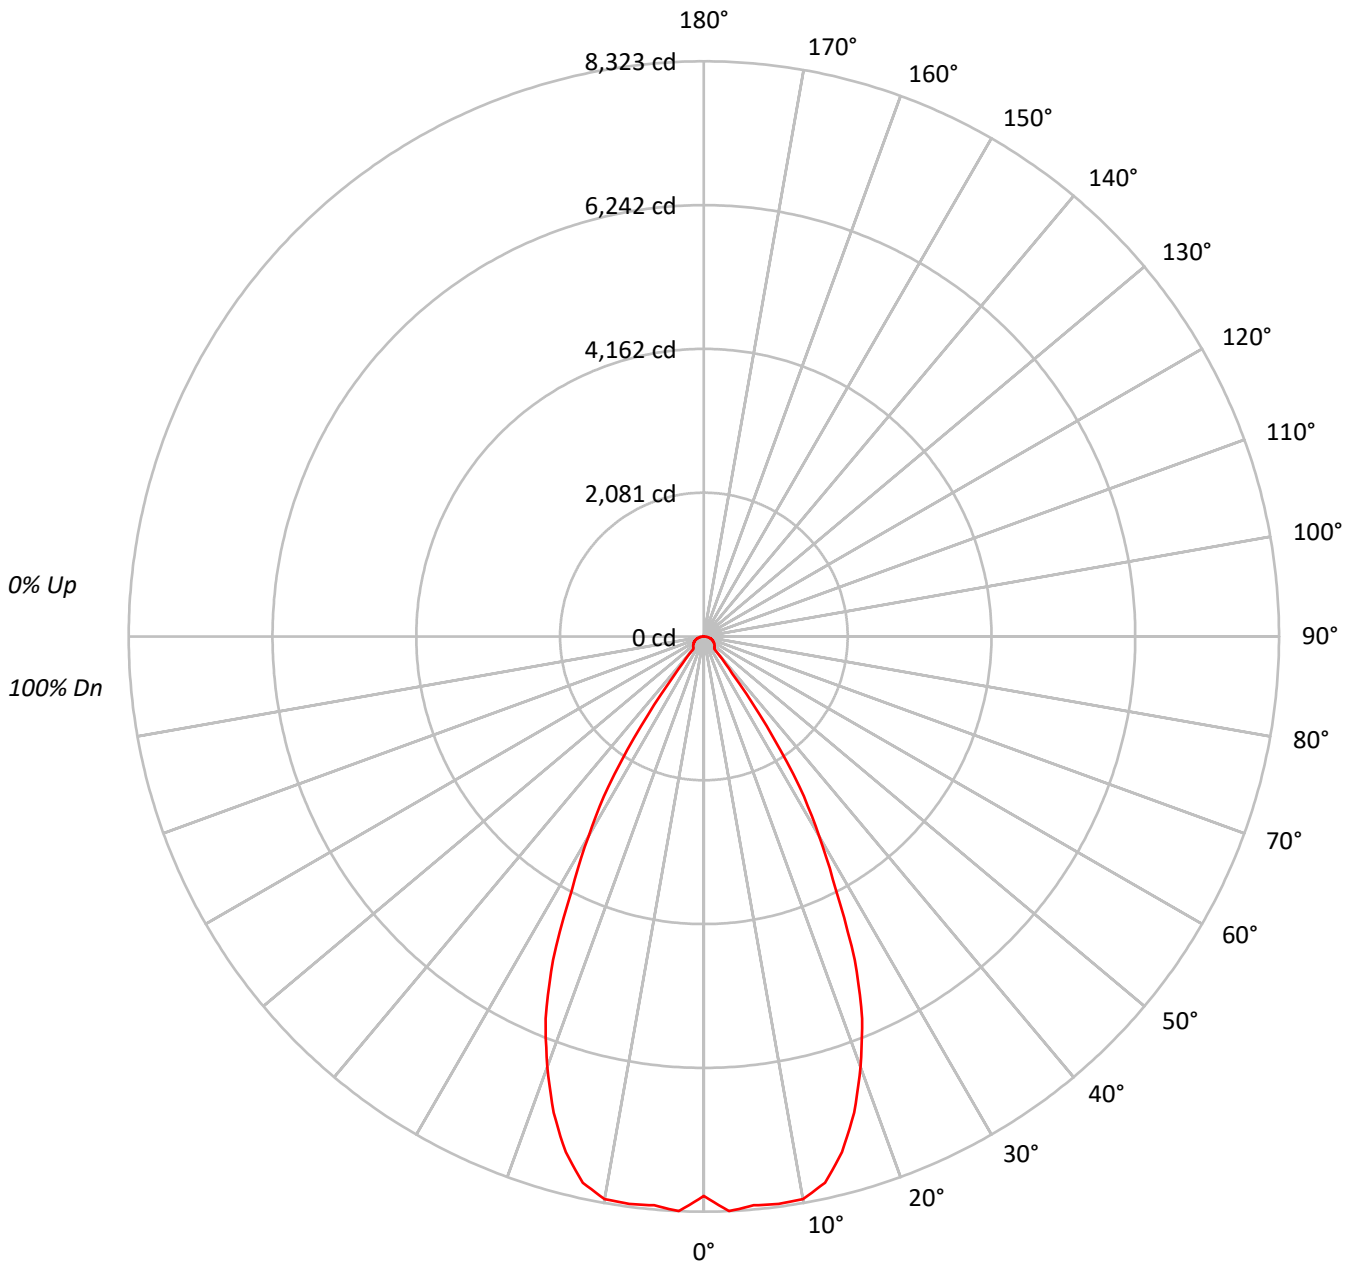



TEST NUMBER: P755081

CATALOG NUMBER: LD4D85BD010-EU4DR6070959050-4LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	884477
5°	906226
10°	917171
15°	873723
20°	770354
25°	623081
30°	421462
35°	211198
40°	34260
45°	33530
50°	34200
55°	34726
60°	35685
65°	36505
70°	37345
75°	37783
80°	36431
85°	30338

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 37783 cd/sqm



TEST NUMBER: P755081

CATALOG NUMBER: LD4D85BD010-EU4DR6070959050-4LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	789.7	11.6
10°-20°	2136.6	31.3
20°-30°	2298.8	33.7
30°-40°	999.2	14.7
40°-50°	167.8	2.5
50°-60°	163.2	2.4
60°-70°	139.6	2.0
70°-80°	93.3	1.4
80°-90°	27.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5225.0	76.7
0°-40°	6224.2	91.3
0°-60°	6555.2	96.2
0°-90°	6816.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6816.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8095	
5°	8263	790
15°	7724	2137
25°	5168	2299
35°	1583	999
45°	217	168
55°	182	163
65°	141	140
75°	90	93
85°	24	28
90°	0	



TEST NUMBER: P755081

CATALOG NUMBER: LD4D85BD010-EU4DR6070959050-4LBDP1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8095.1
2.5°	8322.6
5°	8262.6
7.5°	8281.5
10°	8266.8
12.5°	8096.1
15°	7724.2
17.5°	7224.9
20°	6625.4
22.5°	5983.9
25°	5168.4
27.5°	4133.9
30°	3340.6
32.5°	2574.7
35°	1583.4
37.5°	677.4
40°	240.2
42.5°	221.2
45°	217.0
47.5°	209.6
50°	201.2
52.5°	191.7
55°	182.3
57.5°	172.8
60°	163.3
62.5°	152.8
65°	141.2
67.5°	129.6
70°	116.9
72.5°	103.2
75°	89.5
77.5°	73.7
80°	57.9
82.5°	41.1
85°	24.2
87.5°	8.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)