

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755893

Luminaire Tested: LD4D90BD010-EU4DR6570959027-4LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P755893  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D90BD010-EU4DR6570959027-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8079.9 lumens  
Efficiency: N/A  
Efficacy: 81.7 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 98.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P755893

CATALOG NUMBER: LD4D90BD010-EU4DR6570959027-4LBS1LI

### Luminous Intensity Polar Plot

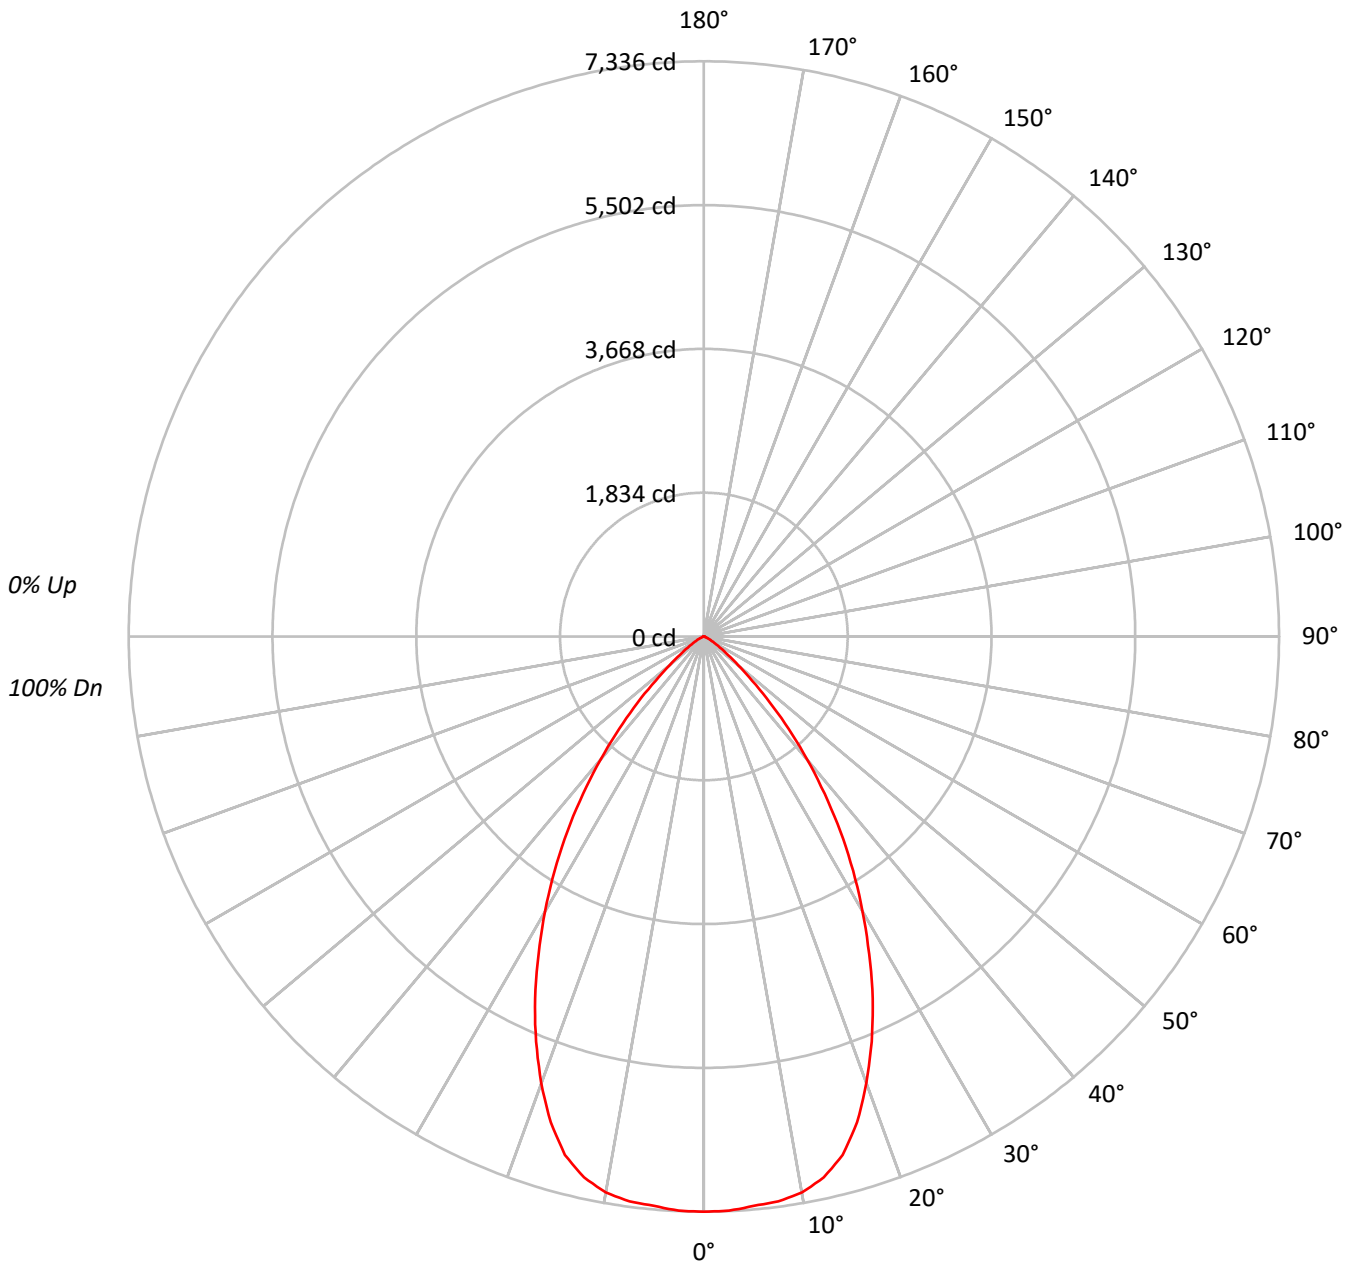



TEST NUMBER: P755893

CATALOG NUMBER: LD4D90BD010-EU4DR6570959027-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72	72	72	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56	56	56	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49	49	49	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46	46	46	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	428474
5°	427391
10°	427030
15°	413865
20°	376772
25°	328330
30°	273081
35°	216375
40°	156172
45°	98660
50°	51427
55°	27330
60°	14356
65°	7891
70°	3313
75°	3656
80°	2523
85°	2144

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 98660 cd/sqm



TEST NUMBER: P755893

CATALOG NUMBER: LD4D90BD010-EU4DR6570959027-4LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	693.8	8.6
10°-20°	1899.9	23.5
20°-30°	2322.3	28.7
30°-40°	1884.2	23.3
40°-50°	938.9	11.6
50°-60°	261.9	3.2
60°-70°	59.5	0.7
70°-80°	15.5	0.2
80°-90°	4.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4915.9	60.8
0°-40°	6800.1	84.2
0°-60°	8001.0	99.0
0°-90°	8079.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8079.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7336	
5°	7290	694
15°	6845	1900
25°	5095	2322
35°	3035	1884
45°	1194	939
55°	268	262
65°	57	60
75°	16	15
85°	3	4
90°	0	



TEST NUMBER: P755893

CATALOG NUMBER: LD4D90BD010-EU4DR6570959027-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7336.4
2.5°	7331.0
5°	7290.0
7.5°	7266.3
10°	7200.6
12.5°	7066.9
15°	6844.8
17.5°	6497.6
20°	6062.1
22.5°	5592.0
25°	5095.0
27.5°	4563.5
30°	4049.3
32.5°	3541.5
35°	3034.8
37.5°	2529.2
40°	2048.4
42.5°	1597.7
45°	1194.5
47.5°	832.3
50°	566.0
52.5°	390.3
55°	268.4
57.5°	181.1
60°	122.9
62.5°	85.2
65°	57.1
67.5°	29.1
70°	19.4
72.5°	18.3
75°	16.2
77.5°	10.8
80°	7.5
82.5°	5.4
85°	3.2
87.5°	2.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)