

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755588

Luminaire Tested: LD4D90BD010-EU4DR4570959030-4LBDP1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P755588  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D90BD010-EU4DR4570959030-4LBDP1B  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7759.9 lumens  
Efficiency: N/A  
Efficacy: 78.5 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 98.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P755588  
CATALOG NUMBER: LD4D90BD010-EU4DR4570959030-4LBDP1B

### Luminous Intensity Polar Plot

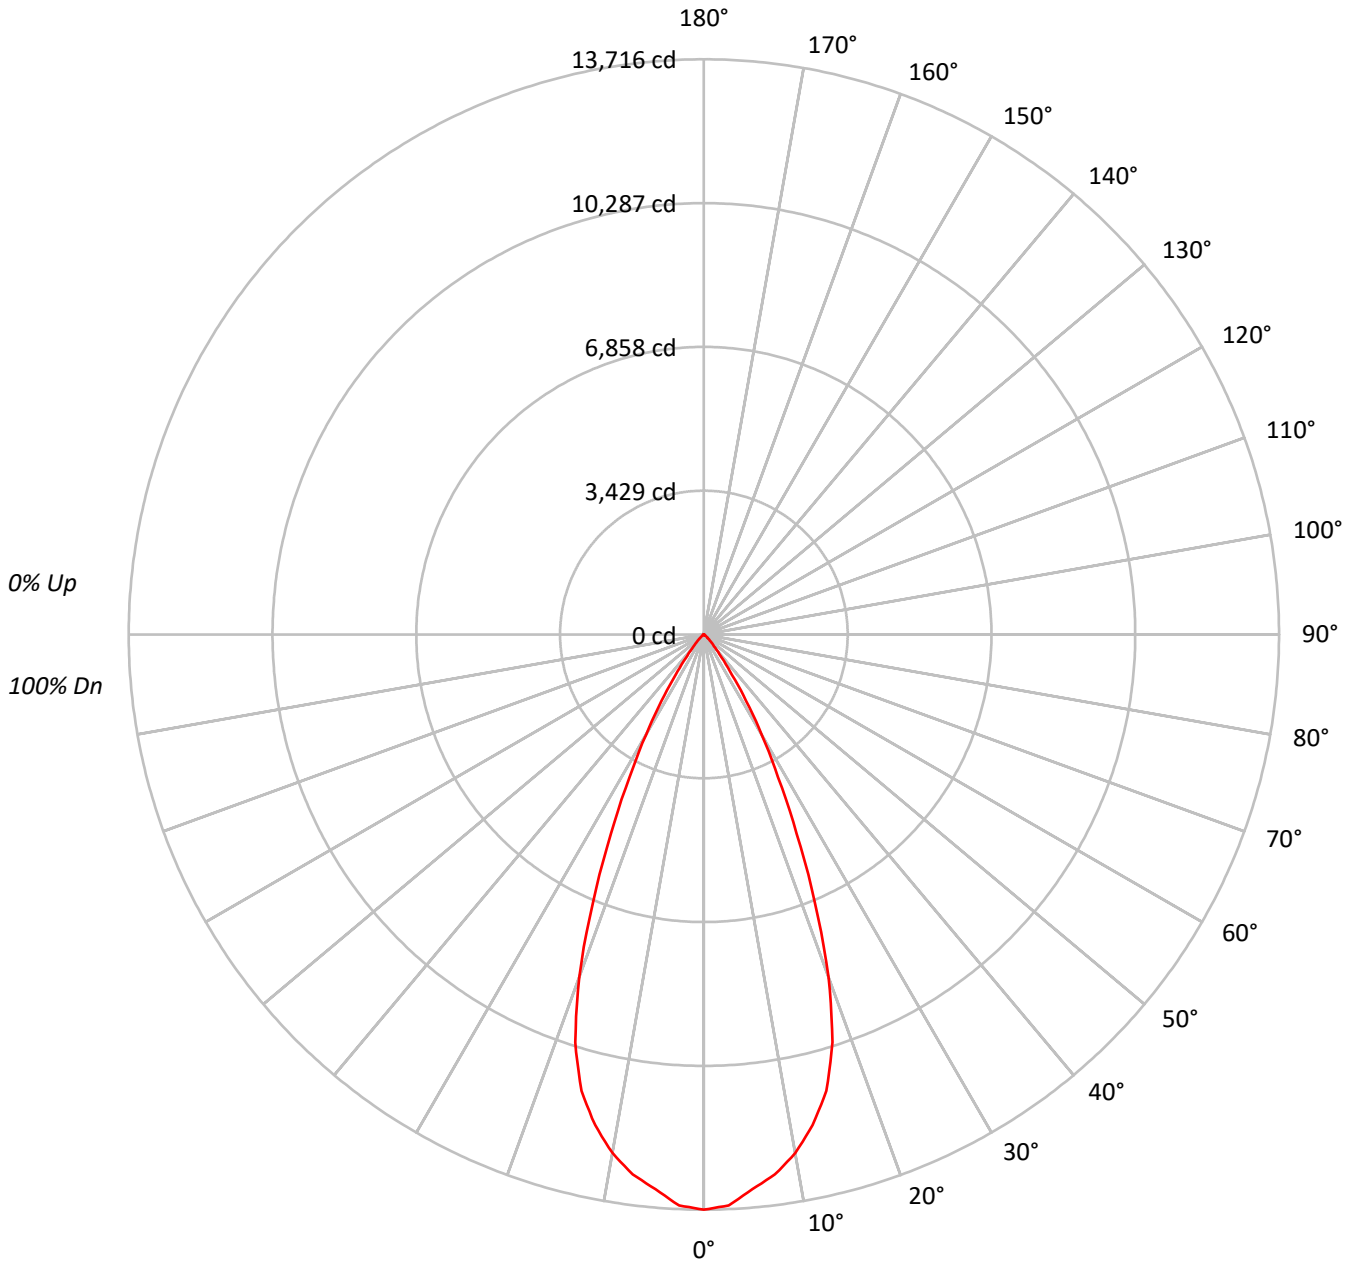



TEST NUMBER: P755588

CATALOG NUMBER: LD4D90BD010-EU4DR4570959030-4LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95						95													
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90						90													
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85						85													
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81						81													
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77						77													
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73						73													
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69						69													
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66						66													
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63						63													
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60						60													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1498610
5°	1455944
10°	1392942
15°	1274841
20°	1011388
25°	631424
30°	348022
35°	156271
40°	61545
45°	29003
50°	13751
55°	7201
60°	3540
65°	827
70°	351
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 29003 cd/sqm



TEST NUMBER: P755588

CATALOG NUMBER: LD4D90BD010-EU4DR4570959030-4LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1247.3	16.1
10°-20°	3069.7	39.6
20°-30°	2430.9	31.3
30°-40°	809.5	10.4
40°-50°	160.6	2.1
50°-60°	36.5	0.5
60°-70°	5.3	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6747.9	87.0
0°-40°	7557.4	97.4
0°-60°	7754.5	99.9
0°-90°	7759.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7759.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	13716	
5°	13275	###
15°	11270	3070
25°	5238	2431
35°	1172	810
45°	188	161
55°	38	36
65°	3	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P755588

CATALOG NUMBER: LD4D90BD010-EU4DR4570959030-4LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	13715.9
2.5°	13626.4
5°	13274.7
7.5°	12984.5
10°	12555.1
12.5°	11983.4
15°	11270.3
17.5°	10197.9
20°	8698.4
22.5°	6911.9
25°	5237.6
27.5°	3835.1
30°	2758.5
32.5°	1876.0
35°	1171.6
37.5°	694.7
40°	431.5
42.5°	283.7
45°	187.7
47.5°	120.8
50°	80.9
52.5°	53.9
55°	37.8
57.5°	24.8
60°	16.2
62.5°	8.6
65°	3.2
67.5°	1.1
70°	1.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)