

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755383

Luminaire Tested: LD4D90BD010-EU4DR3070959040-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P755383
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D90BD010-EU4DR3070959040-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7920.0 lumens
Efficiency: N/A
Efficacy: 80.1 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P755383
CATALOG NUMBER: LD4D90BD010-EU4DR3070959040-4LBDP1MW

Luminous Intensity Polar Plot

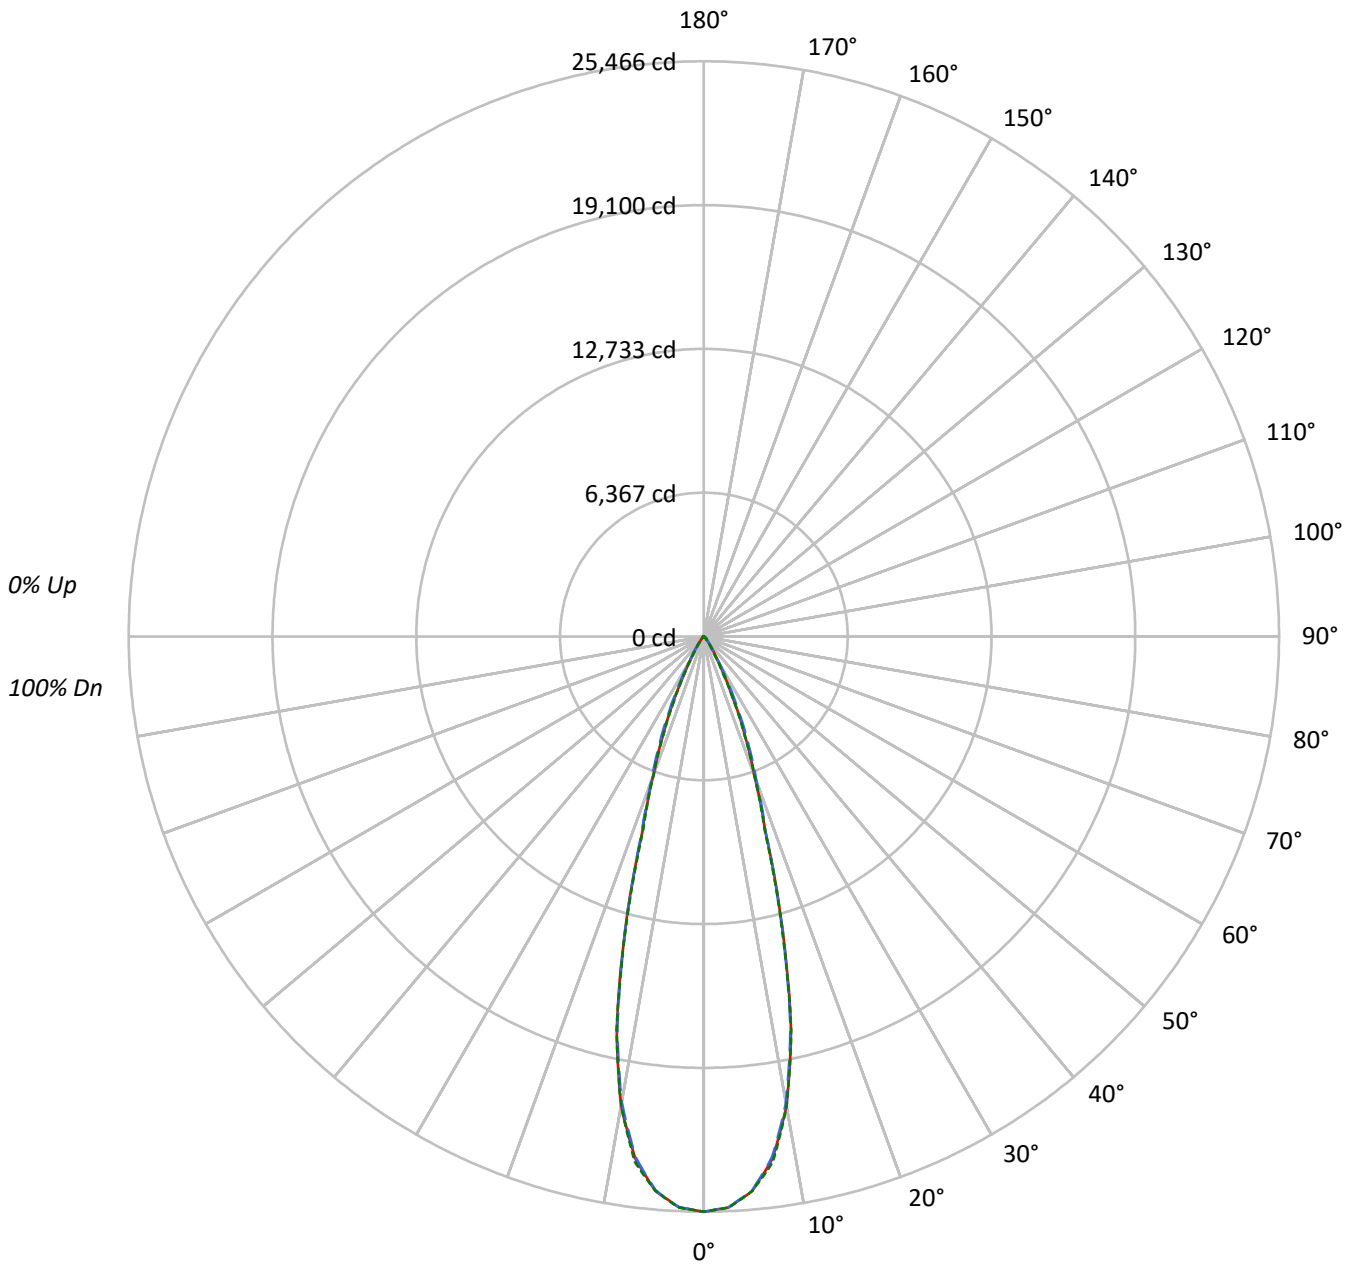



TEST NUMBER: P755383

CATALOG NUMBER: LD4D90BD010-EU4DR3070959040-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1949277	1949277	1949277
5°	1893318	1891113	1893418
10°	1639903	1628338	1639514
15°	1069954	1064209	1058860
20°	532037	552001	531328
25°	268005	302218	262515
30°	107308	116915	93493
35°	49767	47665	39956
40°	21493	23861	20244
45°	15155	18814	15296
50°	5216	13694	5513
55°	3003	5672	3176
60°	2113	2495	2113
65°	1358	1358	1358
70°	850	559	850
75°	0	384	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 18814 cd/sqm



TEST NUMBER: P755383

CATALOG NUMBER: LD4D90BD010-EU4DR3070959040-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2239.4	28.3
10°-20°	3606.5	45.5
20°-30°	1558.5	19.7
30°-40°	355.2	4.5
40°-50°	122.0	1.5
50°-60°	29.8	0.4
60°-70°	7.7	0.1
70°-80°	0.8	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7404.4	93.5
0°-40°	7759.6	98.0
0°-60°	7911.4	99.9
0°-90°	7920.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7920.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	25466	25466	25466	25466	25466	
5°	24641	24617	24612	24664	24642	2241
15°	13502	13340	13430	13386	13362	3615
25°	3173	3293	3578	3210	3108	1519
35°	533	544	510	506	428	361
45°	140	174	174	174	141	99
55°	22	24	42	25	24	22
65°	8	8	8	8	8	7
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P755383

CATALOG NUMBER: LD4D90BD010-EU4DR3070959040-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	25466.3	25466.3	25466.3	25466.3	25466.3
2.5°	25297.5	25280.0	25290.0	25302.5	25307.5
5°	24641.1	24617.4	24612.4	24663.6	24642.4
7.5°	23317.0	23283.3	23232.0	23348.3	23457.1
10°	21099.0	21061.5	20950.2	21005.2	21094.0
12.5°	17824.4	17703.2	17700.7	17875.7	17851.9
15°	13502.1	13339.6	13429.6	13385.8	13362.1
17.5°	9079.8	9017.2	9137.3	9101.0	8944.7
20°	6531.6	6547.9	6776.7	6661.7	6522.9
22.5°	4766.2	4825.0	5096.3	4799.9	4691.2
25°	3173.3	3293.3	3578.4	3209.5	3108.3
27.5°	1951.7	2006.7	2295.6	1926.7	1871.7
30°	1214.1	1186.5	1322.8	1135.3	1057.8
32.5°	796.4	761.4	805.2	722.7	660.2
35°	532.6	543.9	510.1	506.4	427.6
37.5°	332.6	382.6	337.6	360.1	275.1
40°	215.1	277.6	238.8	263.8	202.6
42.5°	176.3	213.8	196.3	208.8	180.0
45°	140.0	173.8	173.8	173.8	141.3
47.5°	77.5	116.3	148.8	118.8	82.5
50°	43.8	58.8	115.0	61.3	46.3
52.5°	30.0	33.8	78.8	35.0	31.3
55°	22.5	23.8	42.5	25.0	23.8
57.5°	17.5	18.8	22.5	18.8	17.5
60°	13.8	13.8	16.3	15.0	13.8
62.5°	10.0	10.0	11.3	10.0	10.0
65°	7.5	7.5	7.5	7.5	7.5
67.5°	3.8	5.0	5.0	5.0	5.0
70°	3.8	2.5	2.5	2.5	3.8
72.5°	2.5	1.3	1.3	1.3	1.3
75°	0.0	0.0	1.3	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)