

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741952

Luminaire Tested: LD4D10D010-EU4DR200210IC9024-4LBSQW1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P741952
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D10D010-EU4DR200210IC9024-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 738.5 lumens
Efficiency: N/A
Efficacy: 63.1 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741952
CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBSQW1B

Luminous Intensity Polar Plot

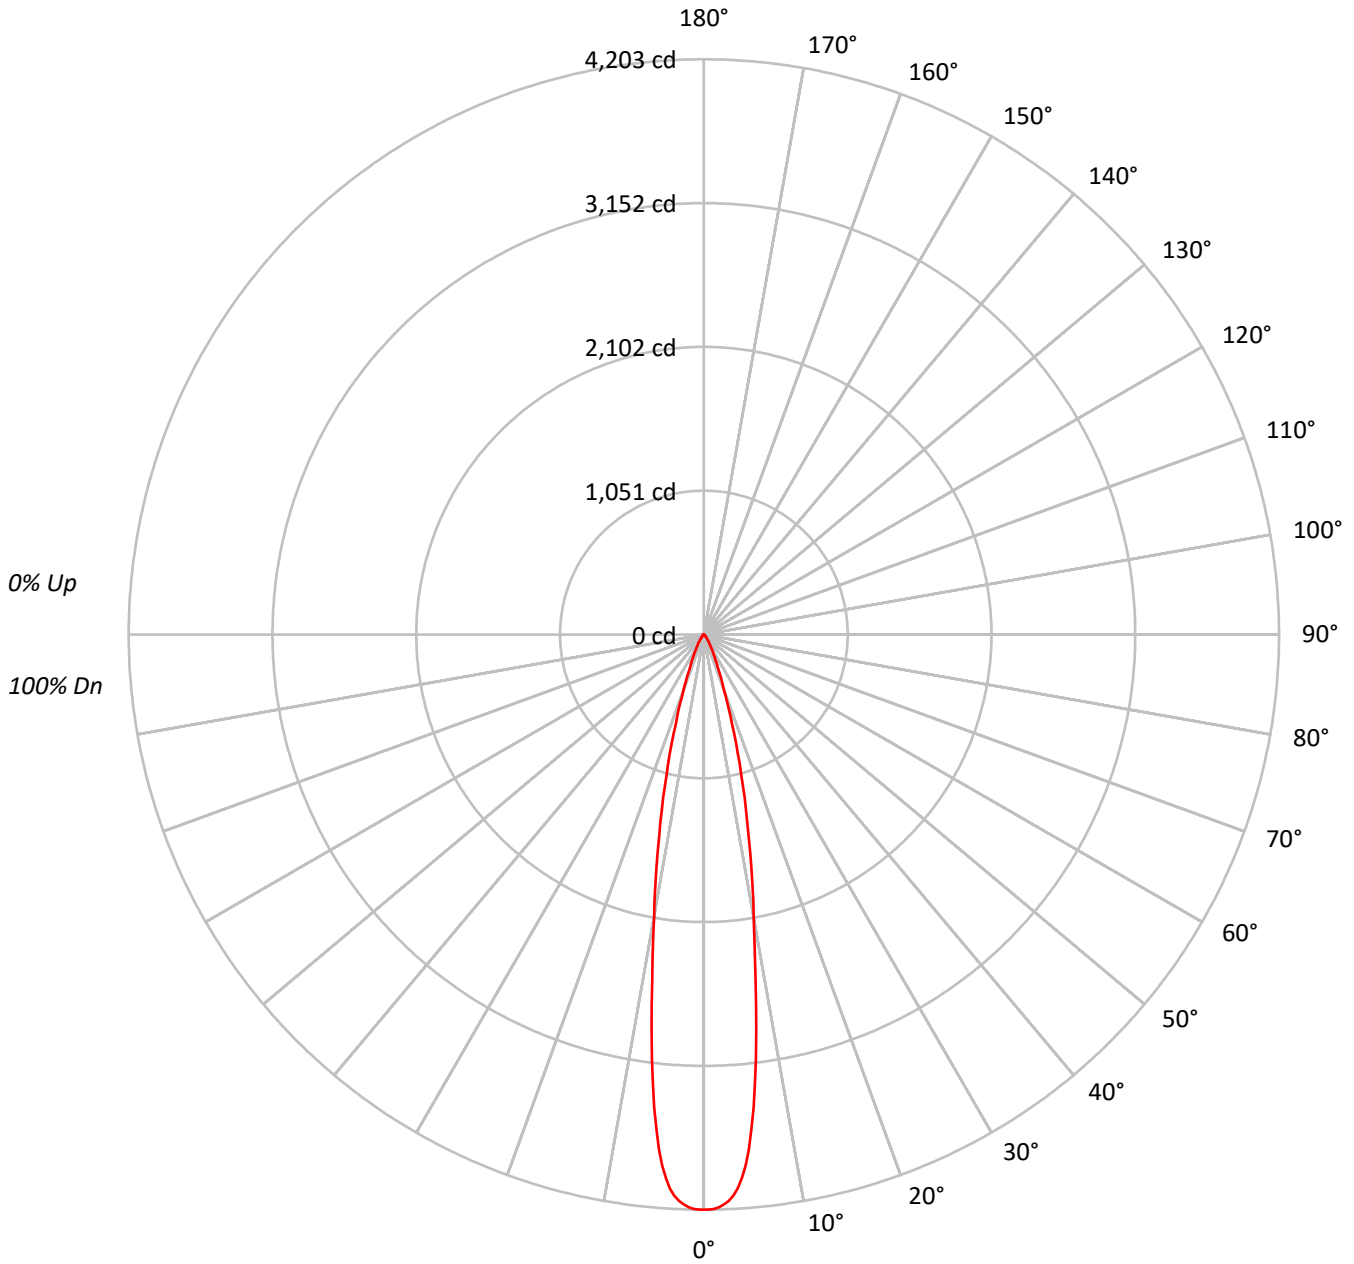



TEST NUMBER: P741952

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	98	96	95	94															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	98	96	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	95	93	92	91															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	93	91	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	91	88	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	88	86	84	83															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	86	84	82	81															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	84	82	80	79															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	82	80	78	77															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	81	78	76	75															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	459245
5°	414331
10°	232543
15°	118205
20°	50044
25°	23099
30°	12225
35°	6589
40°	3523
45°	2086
50°	1207
55°	648
60°	415
65°	284
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2086 cd/sqm



TEST NUMBER: P741952

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	299.3	40.5
10°-20°	294.7	39.9
20°-30°	96.2	13.0
30°-40°	32.8	4.4
40°-50°	11.0	1.5
50°-60°	3.3	0.5
60°-70°	1.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	690.2	93.5
0°-40°	723.0	97.9
0°-60°	737.3	99.8
0°-90°	738.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	738.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4203	
5°	3778	299
15°	1045	295
25°	192	96
35°	49	33
45°	14	11
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P741952

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	4203.2
0.5°	4203.2
1°	4198.0
1.5°	4187.5
2°	4168.4
2.5°	4143.0
3°	4107.0
3.5°	4056.9
4°	3982.4
4.5°	3891.8
5°	3777.7
5.5°	3627.6
6°	3473.8
6.5°	3297.5
7°	3124.9
7.5°	2922.8
8°	2742.4
8.5°	2560.9
9°	2393.2
9.5°	2239.4
10°	2096.0
12.5°	1505.0
15°	1045.0
17.5°	682.7
20°	430.4
22.5°	278.8
25°	191.6
27.5°	134.7
30°	96.9
32.5°	69.6
35°	49.4
37.5°	34.4
40°	24.7
42.5°	18.0
45°	13.5
47.5°	10.5
50°	7.1
52.5°	4.5
55°	3.4
57.5°	2.6
60°	1.9
62.5°	1.5
65°	1.1



TEST NUMBER: P741952

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBSQW1B

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		0.7
70°		0.4

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)