

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741891

Luminaire Tested: LD4D10D010-EU4DR150210IC9030-4LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741891  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D10D010-EU4DR150210IC9030-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 950.6 lumens  
Efficiency: N/A  
Efficacy: 81.2 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741891  
CATALOG NUMBER: LD4D10D010-EU4DR150210IC9030-4LBCSSQMW

### Luminous Intensity Polar Plot

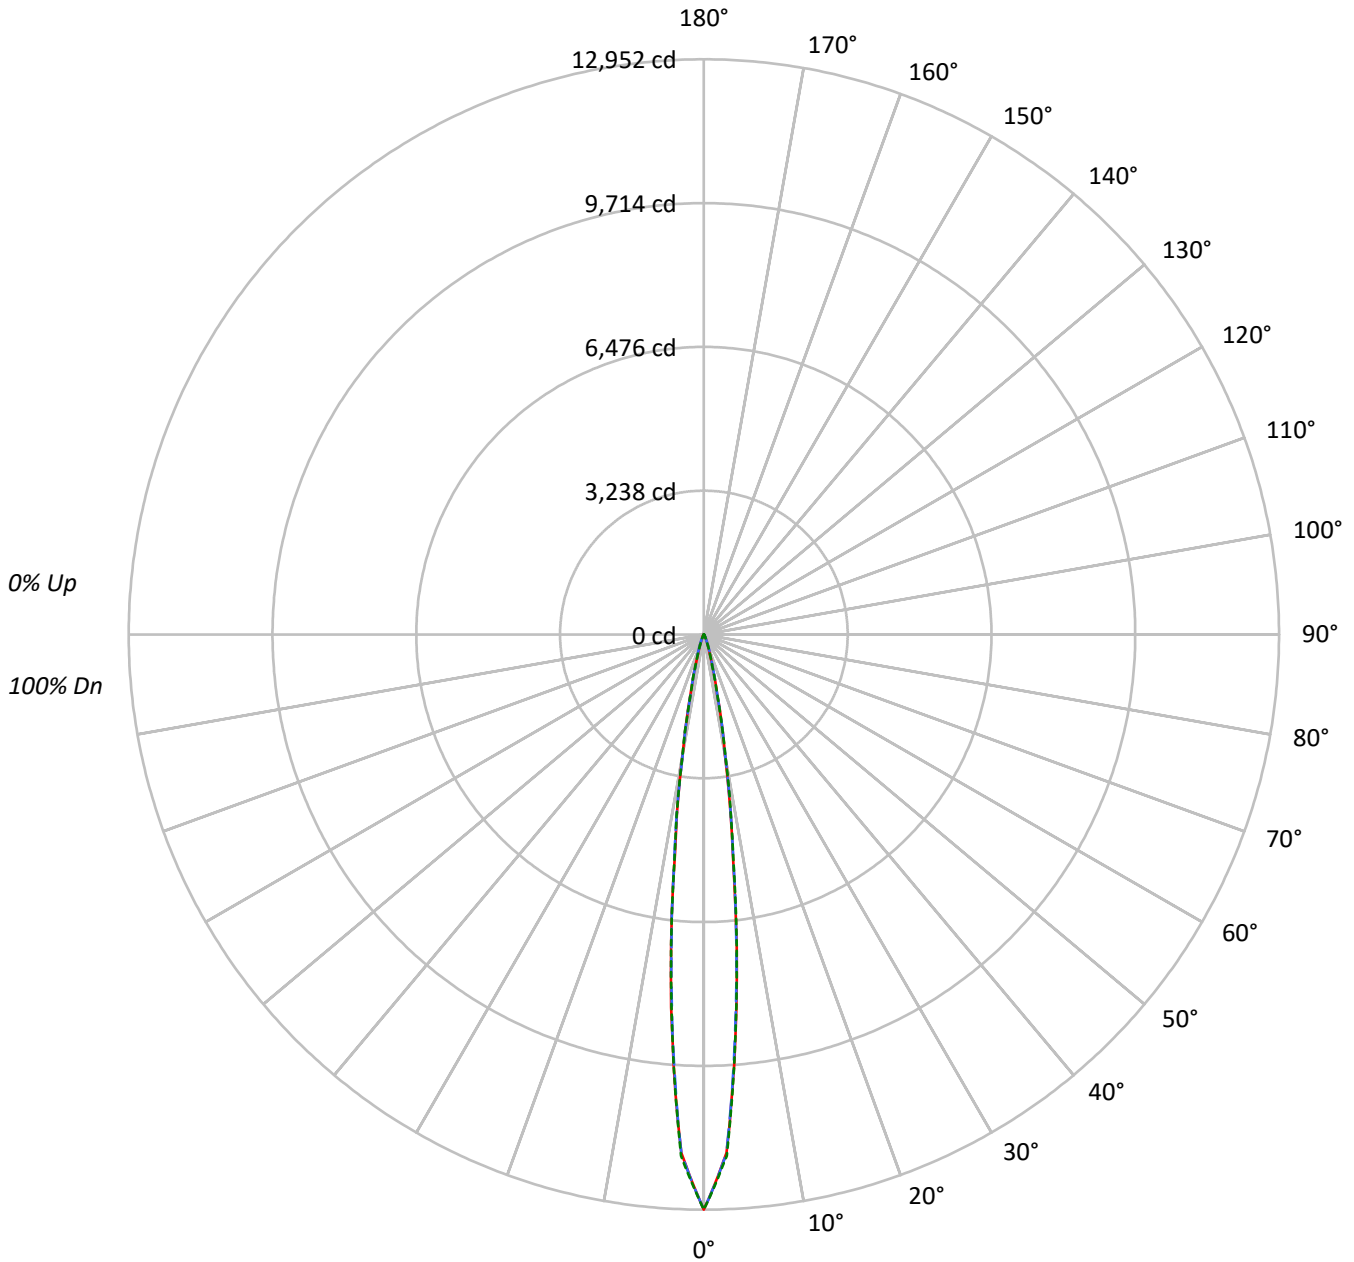



TEST NUMBER: P741891

CATALOG NUMBER: LD4D10D010-EU4DR150210IC9030-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	99	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1457347	1457347	1457347
5°	856406	845319	852006
10°	255597	257389	261327
15°	63579	64813	62815
20°	19024	22027	19425
25°	6707	8546	6793
30°	2464	3242	2501
35°	1235	1394	1191
40°	781	859	781
45°	574	616	574
50°	459	459	459
55°	383	383	383
60°	309	309	309
65°	236	236	236
70°	197	197	197
75°	121	121	166
80°	87	87	87
85°	42	42	42

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 616 cd/sqm



TEST NUMBER: P741891

CATALOG NUMBER: LD4D10D010-EU4DR150210IC9030-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	616.5	64.9
10°-20°	253.6	26.7
20°-30°	50.4	5.3
30°-40°	12.6	1.3
40°-50°	6.6	0.7
50°-60°	4.9	0.5
60°-70°	3.5	0.4
70°-80°	1.9	0.2
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	920.5	96.8
0°-40°	933.1	98.2
0°-60°	944.6	99.4
0°-90°	950.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	950.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	12952	12952	12952	12952	12952	
5°	8427	8340	8318	8375	8384	615
15°	732	746	746	733	723	251
25°	86	98	110	97	87	45
35°	17	18	19	18	16	12
45°	8	8	9	8	8	6
55°	6	6	6	6	6	5
65°	3	3	3	3	3	3
75°	2	2	2	2	2	2
85°	0	0	0	0	0	1
90°	0	0	0	0	0	



TEST NUMBER: P741891

CATALOG NUMBER: LD4D10D010-EU4DR150210IC9030-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	12951.9	12951.9	12951.9	12951.9	12951.9
2.5°	11683.2	11693.0	11696.9	11708.4	11751.1
5°	8426.8	8340.2	8317.7	8375.3	8383.5
7.5°	4991.7	5009.3	5073.4	5087.7	5036.1
10°	2739.3	2761.8	2758.5	2778.2	2800.7
12.5°	1400.9	1383.4	1377.9	1400.4	1369.1
15°	732.0	745.7	746.2	733.1	723.2
17.5°	393.7	409.6	435.9	414.5	381.6
20°	232.5	246.7	269.2	251.7	237.4
22.5°	143.7	155.2	171.1	157.4	145.8
25°	86.1	97.6	109.7	97.0	87.2
27.5°	51.0	60.9	68.5	60.3	50.4
30°	32.9	38.4	43.3	37.8	33.4
32.5°	23.0	25.2	27.4	25.2	23.0
35°	17.0	18.1	19.2	18.1	16.4
37.5°	13.2	14.3	14.8	13.7	12.6
40°	11.0	11.5	12.1	11.5	11.0
42.5°	9.3	9.9	9.9	9.9	9.3
45°	8.2	8.2	8.8	8.2	8.2
47.5°	7.1	7.1	7.7	7.1	7.1
50°	6.6	6.6	6.6	6.6	6.6
52.5°	6.0	6.0	6.0	6.0	6.0
55°	5.5	5.5	5.5	5.5	5.5
57.5°	4.9	4.9	4.9	4.9	4.9
60°	4.4	4.4	4.4	4.4	4.4
62.5°	3.8	3.8	3.8	3.8	3.8
65°	3.3	3.3	3.3	3.3	3.3
67.5°	3.3	3.3	3.3	3.3	3.3
70°	2.7	2.7	2.7	2.7	2.7
72.5°	2.2	2.2	2.2	2.2	2.2
75°	1.6	1.6	1.6	1.6	2.2
77.5°	1.6	1.6	1.6	1.6	1.6
80°	1.1	1.1	1.1	1.1	1.1
82.5°	1.1	1.1	1.1	1.1	1.1
85°	0.5	0.5	0.5	0.5	0.5
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)