

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741982

Luminaire Tested: LD4D10D010-EU4DR200210IC9035-4LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P741982
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D10D010-EU4DR200210IC9035-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1044.9 lumens
Efficiency: N/A
Efficacy: 89.3 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741982

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9035-4LBCSSQMW

Luminous Intensity Polar Plot

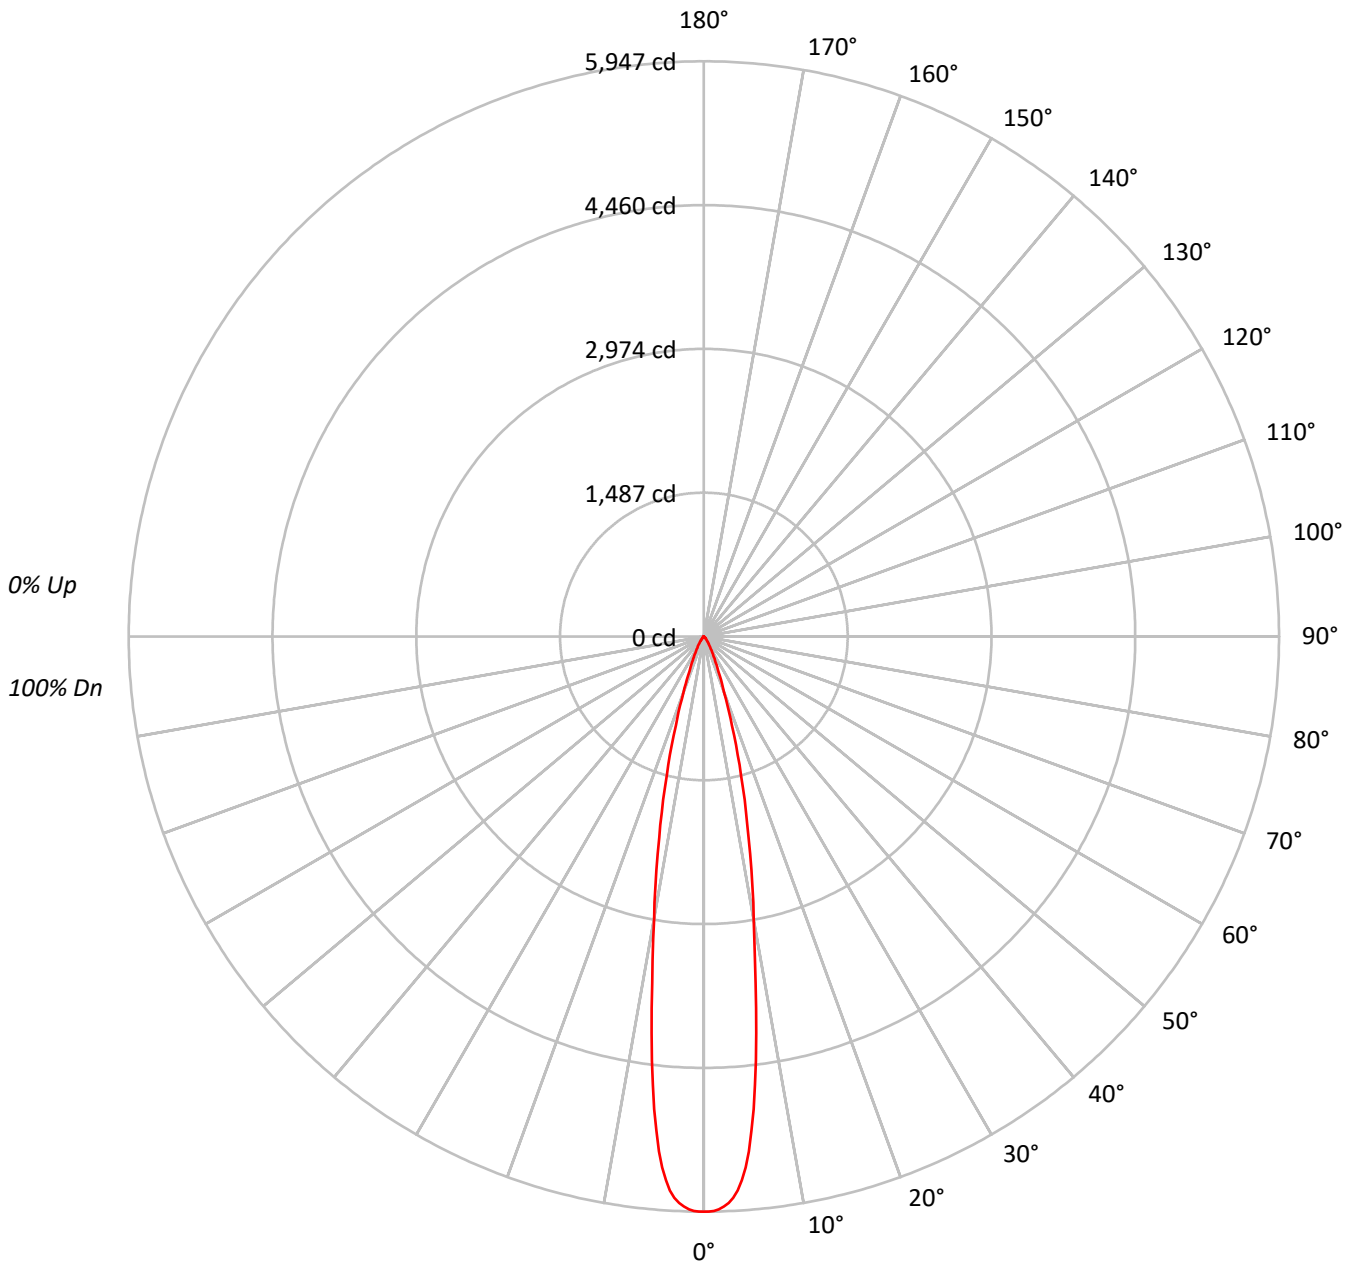



TEST NUMBER: P741982

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9035-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	95	93	92															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	91	89															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	88	86															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	86	84															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	84	82															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	82	80															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	80	78															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	78	76															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	649774
5°	586219
10°	329022
15°	167241
20°	70810
25°	32683
30°	17310
35°	9323
40°	4992
45°	2951
50°	1717
55°	914
60°	568
65°	414
70°	160
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2951 cd/sqm



TEST NUMBER: P741982

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9035-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	423.4	40.5
10°-20°	416.9	39.9
20°-30°	136.2	13.0
30°-40°	46.4	4.4
40°-50°	15.6	1.5
50°-60°	4.7	0.5
60°-70°	1.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	976.5	93.5
0°-40°	1022.9	97.9
0°-60°	1043.2	99.8
0°-90°	1044.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1044.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5947	
5°	5345	423
15°	1478	417
25°	271	136
35°	70	46
45°	19	16
55°	5	5
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P741982

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9035-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	5947.0
0.5°	5947.0
1°	5939.6
1.5°	5924.7
2°	5897.7
2.5°	5861.7
3°	5810.9
3.5°	5739.9
4°	5634.5
4.5°	5506.4
5°	5344.9
5.5°	5132.5
6°	4914.9
6.5°	4665.4
7°	4421.3
7.5°	4135.4
8°	3880.1
8.5°	3623.3
9°	3386.0
9.5°	3168.4
10°	2965.6
12.5°	2129.4
15°	1478.5
17.5°	965.9
20°	609.0
22.5°	394.5
25°	271.1
27.5°	190.6
30°	137.2
32.5°	98.5
35°	69.9
37.5°	48.7
40°	35.0
42.5°	25.4
45°	19.1
47.5°	14.8
50°	10.1
52.5°	6.4
55°	4.8
57.5°	3.7
60°	2.6
62.5°	2.1
65°	1.6



TEST NUMBER: P741982
CATALOG NUMBER: LD4D10D010-EU4DR200210IC9035-4LBCSSQMW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		1.1
70°		0.5

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)