

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743570

Luminaire Tested: LD4D15D010-EU4DR600215IC9024-4LBSQW1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P743570
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D15D010-EU4DR600215IC9024-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 937.5 lumens
Efficiency: N/A
Efficacy: 59.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P743570
CATALOG NUMBER: LD4D15D010-EU4DR600215IC9024-4LBSQW1B

Luminous Intensity Polar Plot

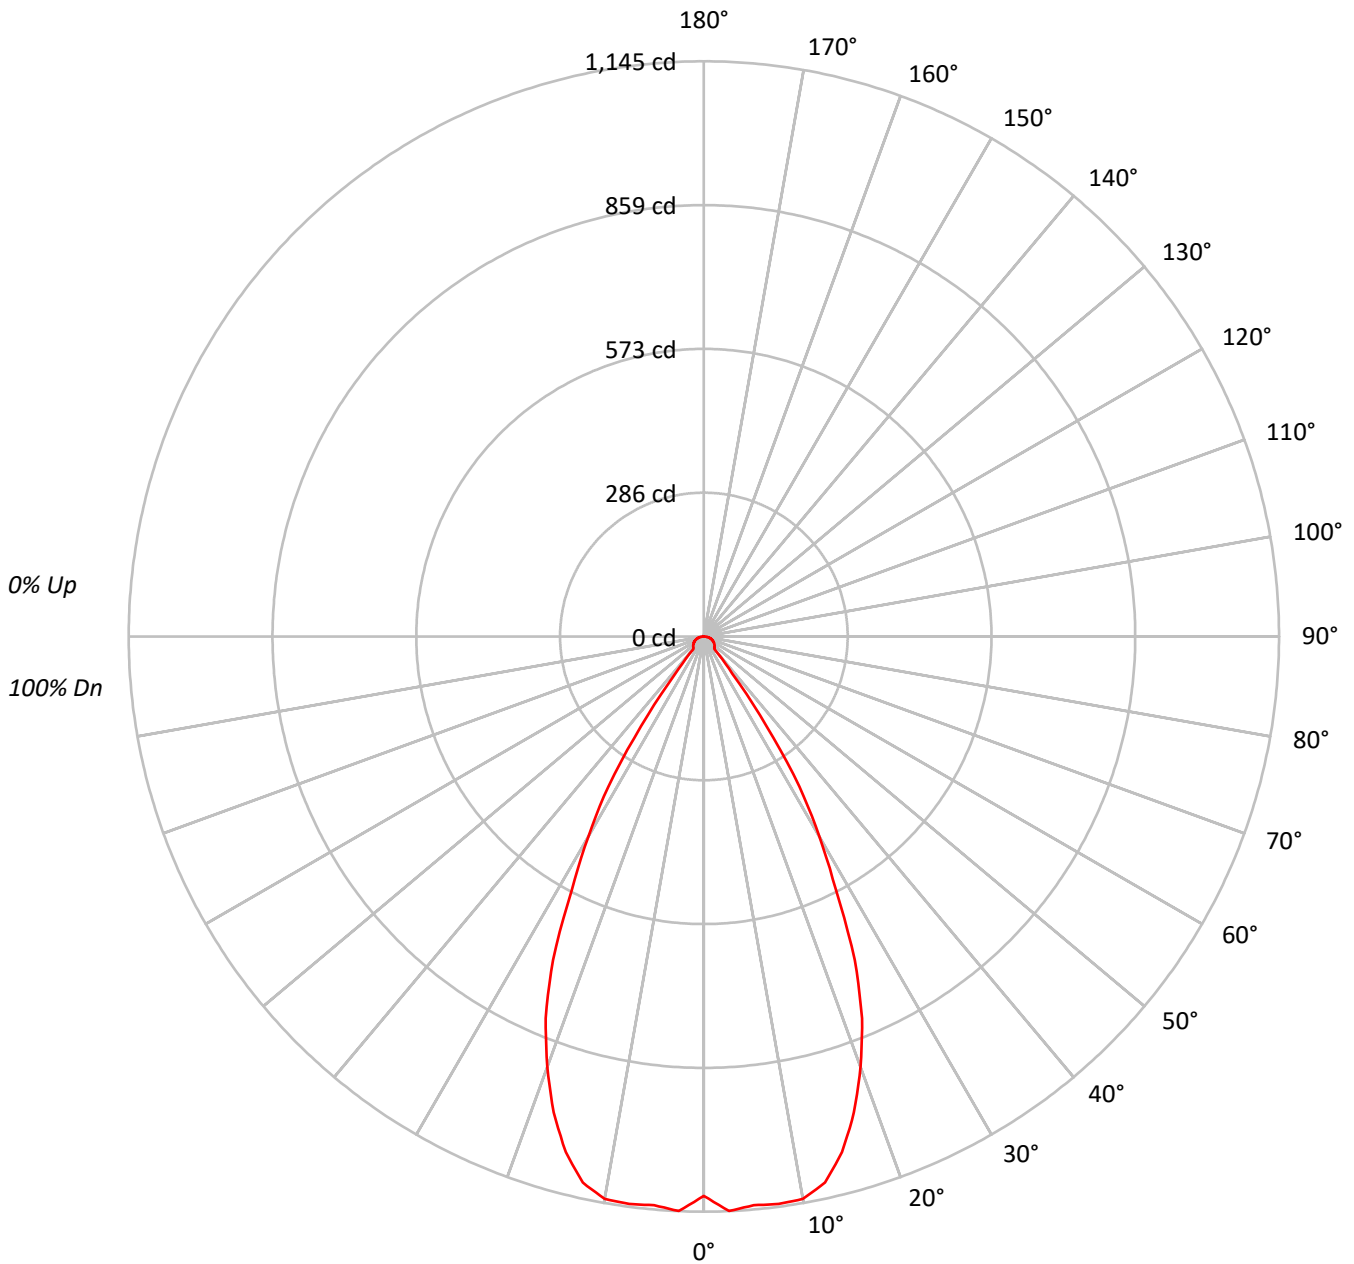



TEST NUMBER: P743570

CATALOG NUMBER: LD4D15D010-EU4DR600215IC9024-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	121651
5°	124638
10°	126146
15°	120173
20°	105959
25°	85703
30°	57972
35°	29051
40°	4721
45°	4620
50°	4708
55°	4781
60°	4917
65°	5016
70°	5143
75°	5192
80°	5034
85°	4137

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 5192 cd/sqm



TEST NUMBER: P743570

CATALOG NUMBER: LD4D15D010-EU4DR600215IC9024-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.6	11.6
10°-20°	293.9	31.3
20°-30°	316.2	33.7
30°-40°	137.4	14.7
40°-50°	23.1	2.5
50°-60°	22.5	2.4
60°-70°	19.2	2.0
70°-80°	12.8	1.4
80°-90°	3.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	718.7	76.7
0°-40°	856.1	91.3
0°-60°	901.7	96.2
0°-90°	937.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	937.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1113	
5°	1136	109
15°	1062	294
25°	711	316
35°	218	137
45°	30	23
55°	25	22
65°	19	19
75°	12	13
85°	3	4
90°	0	



TEST NUMBER: P743570
CATALOG NUMBER: LD4D15D010-EU4DR600215IC9024-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	1113.4
2.5°	1144.7
5°	1136.4
7.5°	1139.1
10°	1137.0
12.5°	1113.6
15°	1062.4
17.5°	993.7
20°	911.3
22.5°	823.0
25°	710.9
27.5°	568.6
30°	459.5
32.5°	354.1
35°	217.8
37.5°	93.2
40°	33.1
42.5°	30.4
45°	29.9
47.5°	28.8
50°	27.7
52.5°	26.4
55°	25.1
57.5°	23.8
60°	22.5
62.5°	21.0
65°	19.4
67.5°	17.8
70°	16.1
72.5°	14.2
75°	12.3
77.5°	10.1
80°	8.0
82.5°	5.7
85°	3.3
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)