

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743117

Luminaire Tested: LD4D15D010-EU4DR300215IC9027-4LBCSSQMMS

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P743117
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D15D010-EU4DR300215IC9027-4LBCSSQMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1159.7 lumens
Efficiency: N/A
Efficacy: 73.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P743117
CATALOG NUMBER: LD4D15D010-EU4DR300215IC9027-4LBCSSQMMS

Luminous Intensity Polar Plot

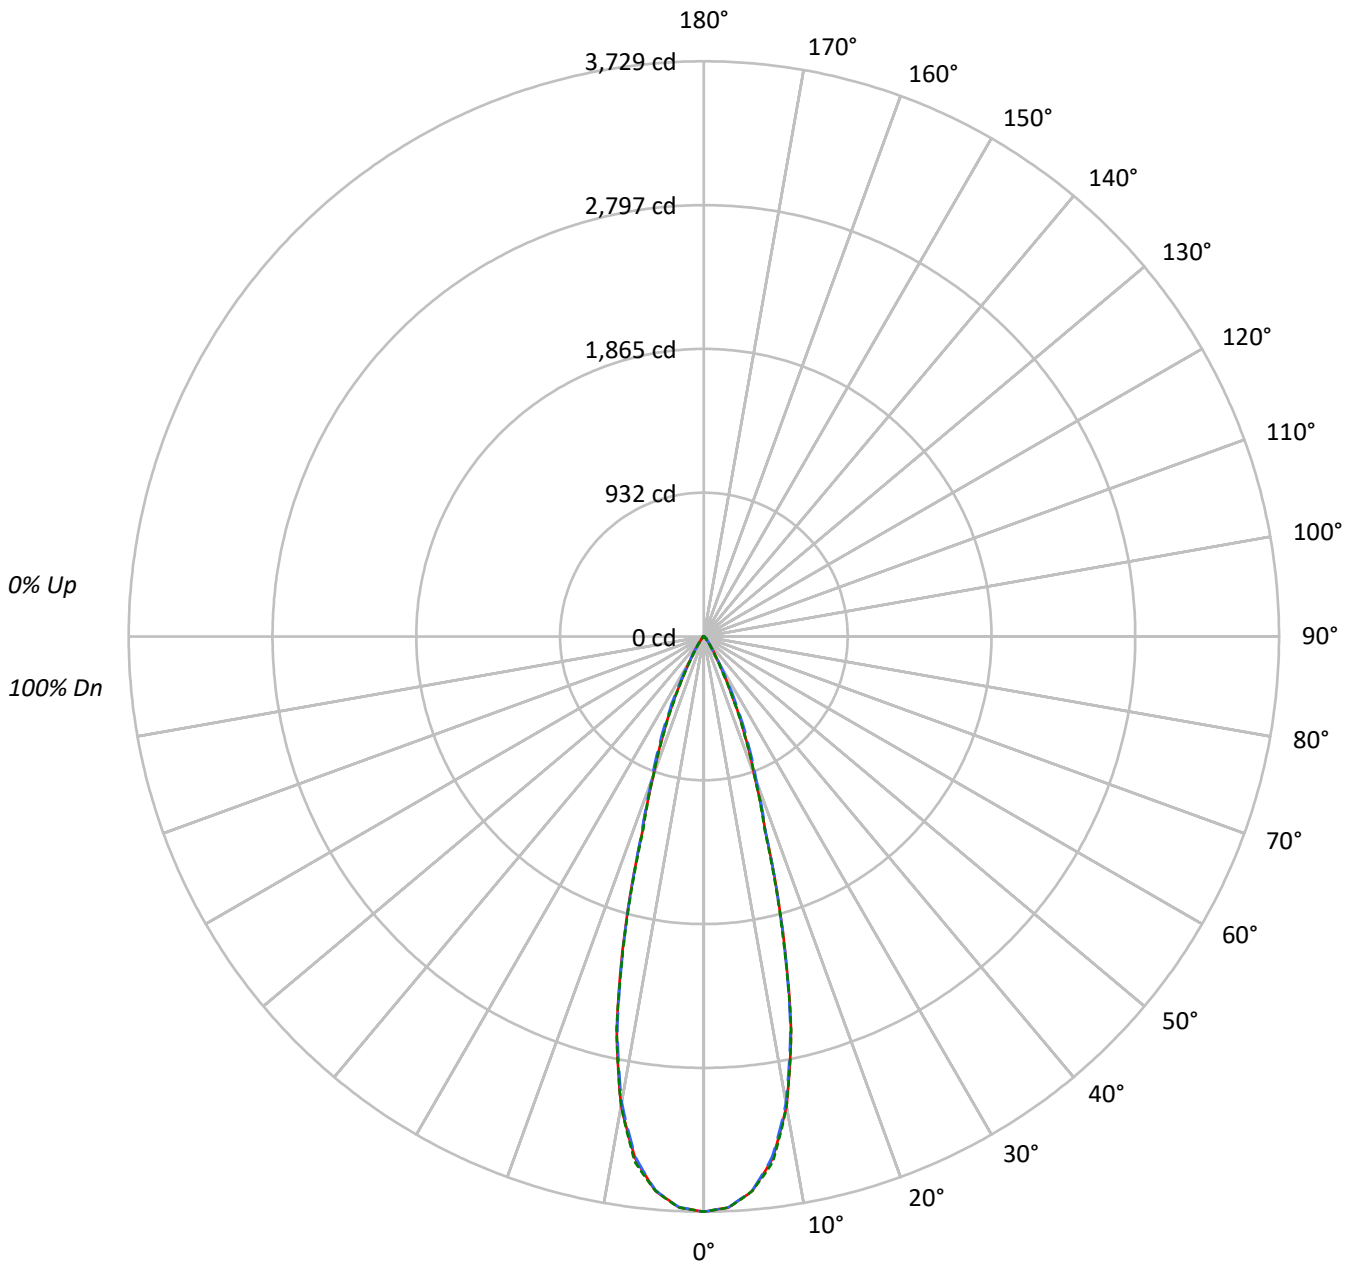



TEST NUMBER: P743117

CATALOG NUMBER: LD4D15D010-EU4DR300215IC9027-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	285446	285446	285446
5°	277247	276924	277262
10°	240137	238442	240082
15°	156680	155832	155056
20°	77904	80837	77807
25°	39247	44255	38445
30°	15715	17120	13691
35°	7288	6980	5849
40°	3147	3487	2968
45°	2219	2750	2241
50°	762	2001	810
55°	440	827	467
60°	306	367	306
65°	199	199	199
70°	134	67	134
75°	0	59	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 2750 cd/sqm



TEST NUMBER: P743117

CATALOG NUMBER: LD4D15D010-EU4DR300215IC9027-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	327.9	28.3
10°-20°	528.1	45.5
20°-30°	228.2	19.7
30°-40°	52.0	4.5
40°-50°	17.9	1.5
50°-60°	4.4	0.4
60°-70°	1.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1084.3	93.5
0°-40°	1136.3	98.0
0°-60°	1158.5	99.9
0°-90°	1159.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1159.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3729	3729	3729	3729	3729	
5°	3608	3605	3604	3612	3608	328
15°	1977	1953	1966	1960	1957	529
25°	465	482	524	470	455	222
35°	78	80	75	74	63	53
45°	20	25	25	25	21	15
55°	3	4	6	4	4	3
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P743117

CATALOG NUMBER: LD4D15D010-EU4DR300215IC9027-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3729.2	3729.2	3729.2	3729.2	3729.2
2.5°	3704.4	3701.8	3703.3	3705.2	3705.9
5°	3608.3	3604.8	3604.1	3611.6	3608.5
7.5°	3414.4	3409.5	3402.0	3419.0	3434.9
10°	3089.6	3084.1	3067.8	3075.9	3088.9
12.5°	2610.1	2592.4	2592.0	2617.6	2614.1
15°	1977.2	1953.4	1966.5	1960.1	1956.7
17.5°	1329.6	1320.4	1338.0	1332.7	1309.8
20°	956.4	958.8	992.4	975.5	955.2
22.5°	697.9	706.6	746.3	702.9	687.0
25°	464.7	482.3	524.0	470.0	455.2
27.5°	285.8	293.9	336.2	282.1	274.1
30°	177.8	173.8	193.7	166.3	154.9
32.5°	116.7	111.5	117.9	105.8	96.7
35°	78.0	79.6	74.7	74.1	62.6
37.5°	48.7	56.0	49.4	52.7	40.3
40°	31.5	40.6	34.9	38.6	29.7
42.5°	25.8	31.3	28.8	30.6	26.4
45°	20.5	25.4	25.4	25.4	20.7
47.5°	11.3	17.0	21.8	17.4	12.1
50°	6.4	8.6	16.8	9.0	6.8
52.5°	4.4	4.9	11.5	5.1	4.6
55°	3.3	3.5	6.2	3.7	3.5
57.5°	2.6	2.8	3.3	2.8	2.6
60°	2.0	2.0	2.4	2.2	2.0
62.5°	1.5	1.5	1.7	1.5	1.5
65°	1.1	1.1	1.1	1.1	1.1
67.5°	0.6	0.7	0.7	0.7	0.7
70°	0.6	0.3	0.3	0.3	0.6
72.5°	0.3	0.2	0.2	0.2	0.2
75°	0.0	0.0	0.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)