

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P742937

Luminaire Tested: LD4D15D010-EU4DR1515309040-4LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P742937
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D15D010-EU4DR1515309040-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1336.4 lumens
Efficiency: N/A
Efficacy: 84.6 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P742937
CATALOG NUMBER: LD4D15D010-EU4DR1515309040-4LBSQW1MW

Luminous Intensity Polar Plot

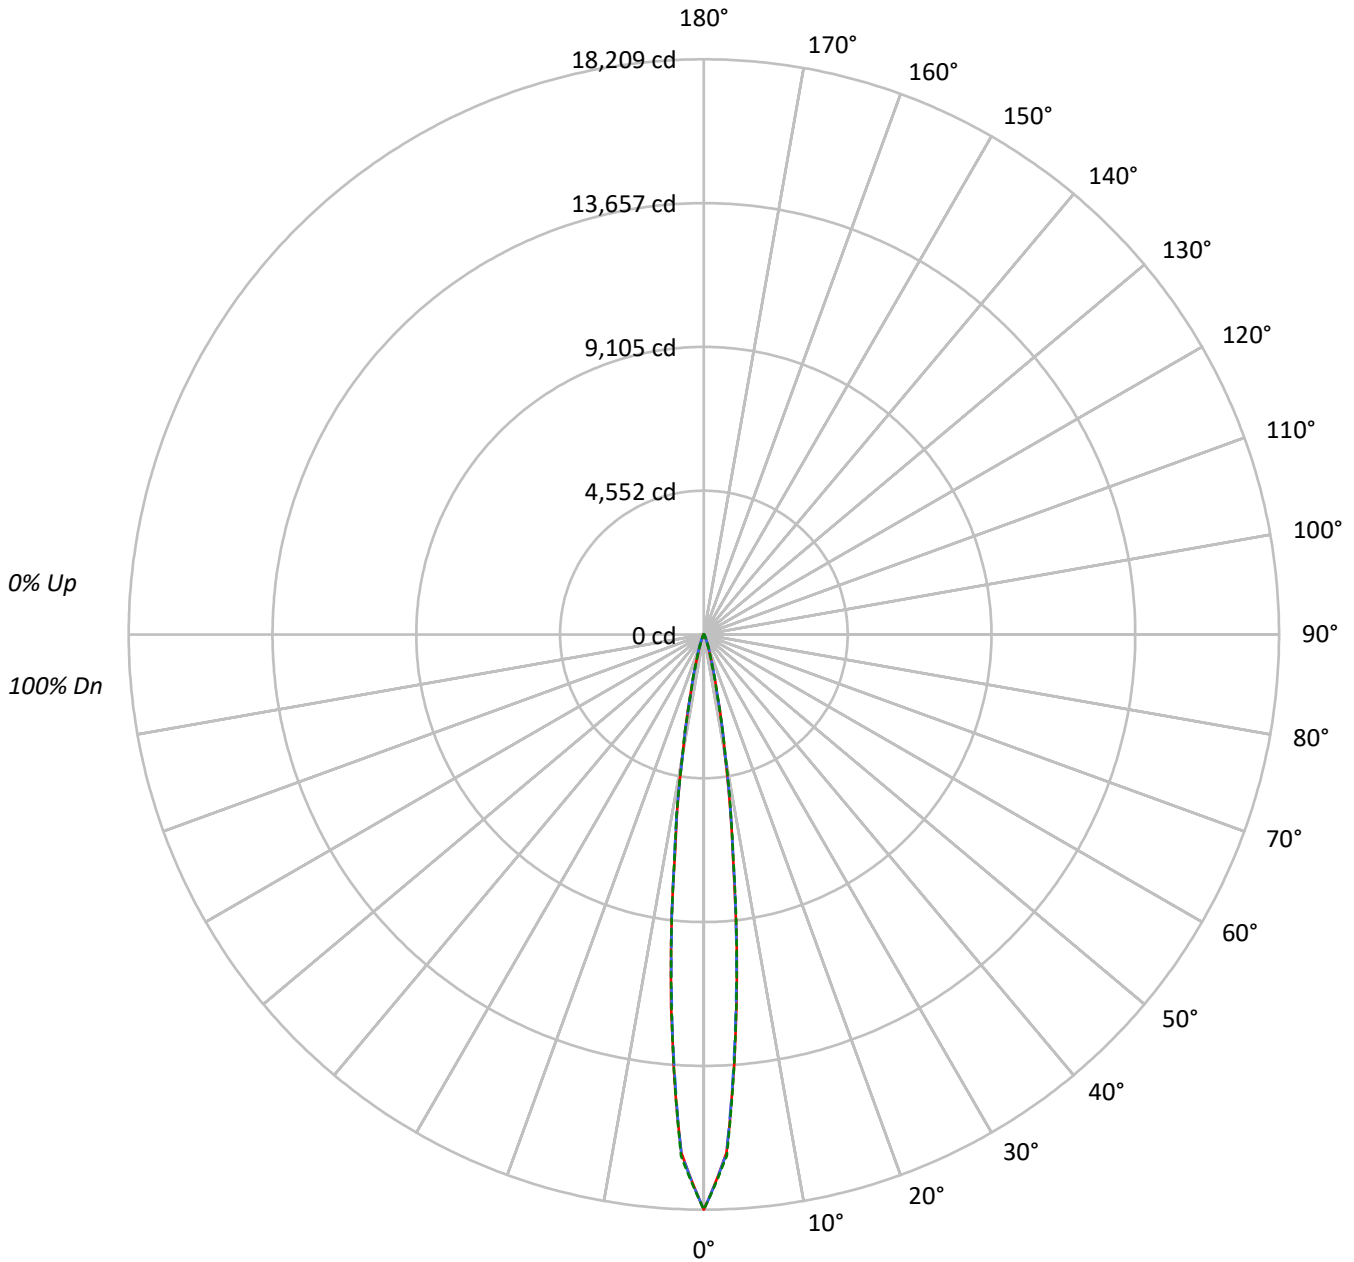



TEST NUMBER: P742937

CATALOG NUMBER: LD4D15D010-EU4DR1515309040-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2048842	2048842	2048842
5°	1203998	1188408	1197808
10°	359337	361856	367389
15°	89384	91122	88307
20°	26740	30970	27312
25°	9426	12012	9551
30°	3467	4560	3519
35°	1736	1961	1678
40°	1094	1207	1094
45°	812	861	812
50°	647	647	647
55°	536	536	536
60°	435	435	435
65°	328	328	328
70°	285	285	285
75°	174	174	234
80°	118	118	118
85°	66	66	66

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 861 cd/sqm



TEST NUMBER: P742937

CATALOG NUMBER: LD4D15D010-EU4DR1515309040-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	866.8	64.9
10°-20°	356.5	26.7
20°-30°	70.8	5.3
30°-40°	17.7	1.3
40°-50°	9.3	0.7
50°-60°	6.9	0.5
60°-70°	4.9	0.4
70°-80°	2.8	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1294.1	96.8
0°-40°	1311.8	98.2
0°-60°	1328.0	99.4
0°-90°	1336.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1336.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	18209	18209	18209	18209	18209	
5°	11847	11725	11694	11774	11786	865
15°	1029	1048	1049	1031	1017	353
25°	121	137	154	136	123	64
35°	24	25	27	25	23	16
45°	12	12	12	12	12	9
55°	8	8	8	8	8	7
65°	5	5	5	5	5	5
75°	2	2	2	2	3	3
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P742937

CATALOG NUMBER: LD4D15D010-EU4DR1515309040-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	18208.7	18208.7	18208.7	18208.7	18208.7
2.5°	16425.0	16438.8	16444.2	16460.4	16520.5
5°	11847.0	11725.2	11693.6	11774.5	11786.1
7.5°	7017.7	7042.4	7132.5	7152.6	7080.1
10°	3851.1	3882.7	3878.1	3905.8	3937.4
12.5°	1969.5	1944.8	1937.1	1968.7	1924.8
15°	1029.1	1048.3	1049.1	1030.6	1016.7
17.5°	553.5	575.8	612.8	582.8	536.5
20°	326.8	346.9	378.5	353.8	333.8
22.5°	202.0	218.1	240.5	221.2	205.0
25°	121.0	137.2	154.2	136.4	122.6
27.5°	71.7	85.6	96.4	84.8	70.9
30°	46.3	54.0	60.9	53.2	47.0
32.5°	32.4	35.5	38.5	35.5	32.4
35°	23.9	25.4	27.0	25.4	23.1
37.5°	18.5	20.0	20.8	19.3	17.7
40°	15.4	16.2	17.0	16.2	15.4
42.5°	13.1	13.9	13.9	13.9	13.1
45°	11.6	11.6	12.3	11.6	11.6
47.5°	10.0	10.0	10.8	10.0	10.0
50°	9.3	9.3	9.3	9.3	9.3
52.5°	8.5	8.5	8.5	8.5	8.5
55°	7.7	7.7	7.7	7.7	7.7
57.5°	6.9	6.9	6.9	6.9	6.9
60°	6.2	6.2	6.2	6.2	6.2
62.5°	5.4	5.4	5.4	5.4	5.4
65°	4.6	4.6	4.6	4.6	4.6
67.5°	4.6	4.6	4.6	4.6	4.6
70°	3.9	3.9	3.9	3.9	3.9
72.5°	3.1	3.1	3.1	3.1	3.1
75°	2.3	2.3	2.3	2.3	3.1
77.5°	2.3	2.3	2.3	2.3	2.3
80°	1.5	1.5	1.5	1.5	1.5
82.5°	1.5	1.5	1.5	1.5	1.5
85°	0.8	0.8	0.8	0.8	0.8
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)