

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743230

Luminaire Tested: LD4D15D010-EU4DR350215IC9040-4LBCSSQMMS

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P743230  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D15D010-EU4DR350215IC9040-4LBCSSQMMS  
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1339.0 lumens  
Efficiency: N/A  
Efficacy: 84.7 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P743230  
CATALOG NUMBER: LD4D15D010-EU4DR350215IC9040-4LBCSSQMMS

### Luminous Intensity Polar Plot

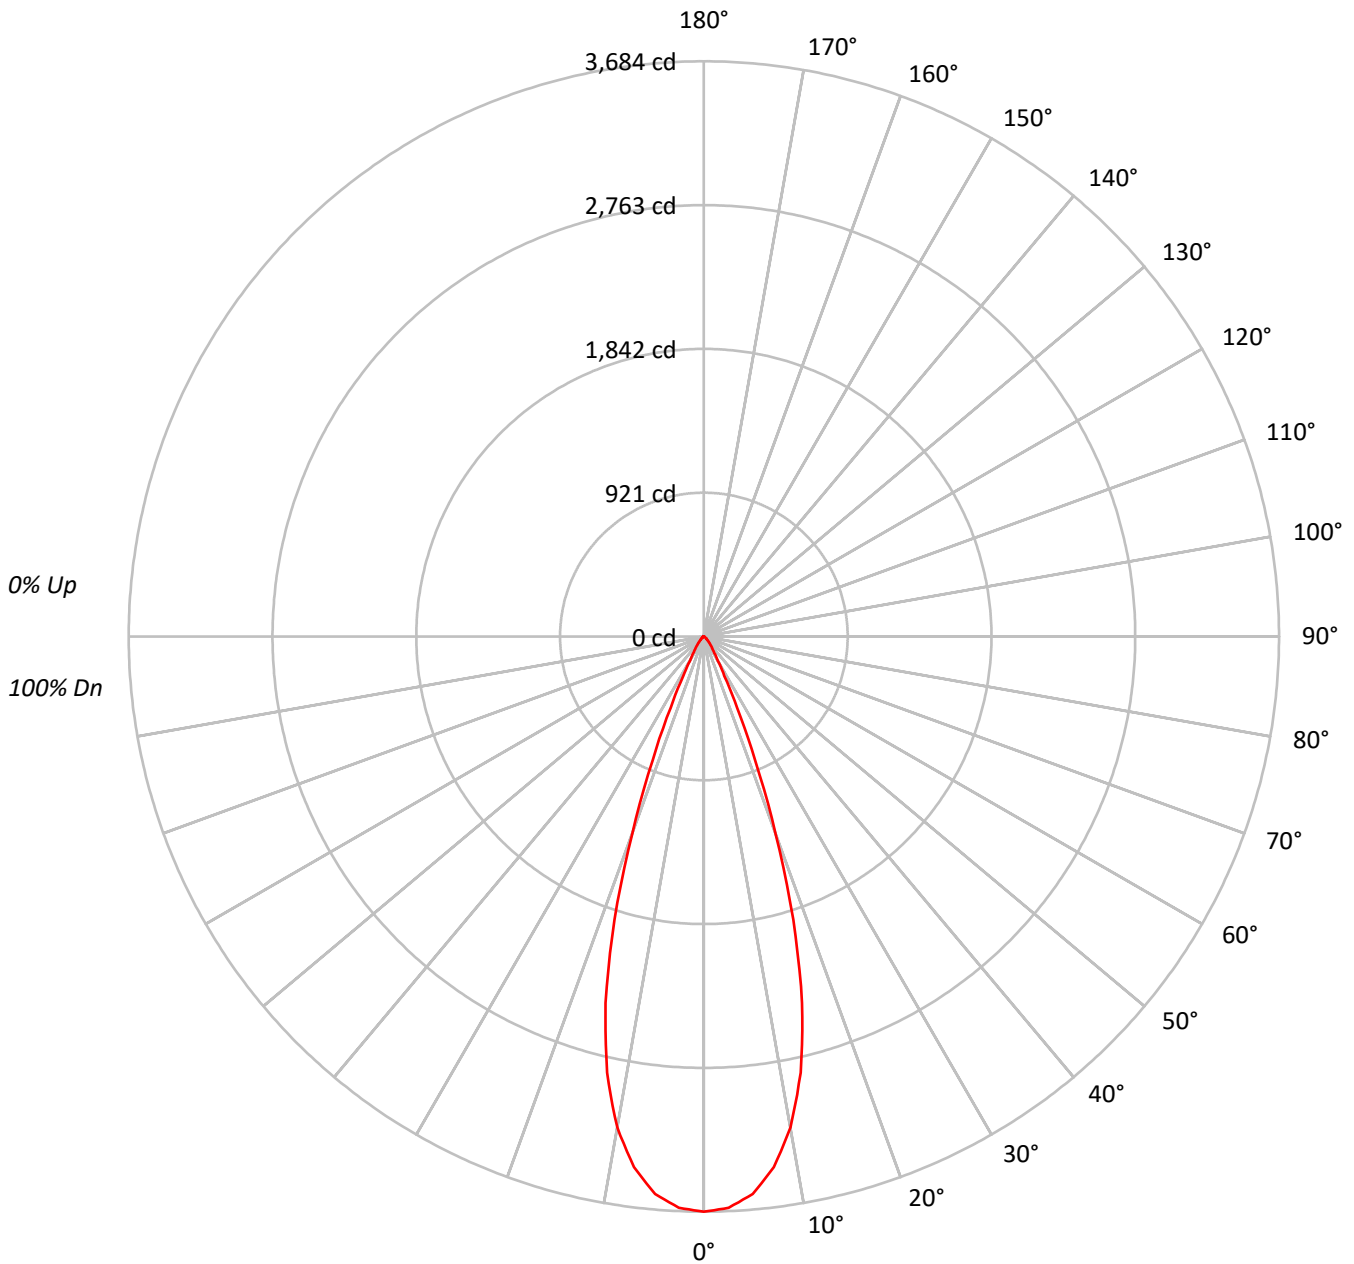



TEST NUMBER: P743230

CATALOG NUMBER: LD4D15D010-EU4DR350215IC9040-4LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96	96	96	96
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88	88	88	88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84	84	84	84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81	81	81	81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78	78	78	78
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75	75	75	75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72	72	72	72
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70	70	70	70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68	68	68	68

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	402538
5°	393086
10°	354274
15°	274971
20°	155957
25°	60676
30°	22634
35°	12405
40°	8101
45°	4945
50°	3145
55°	2210
60°	1617
65°	879
70°	64
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4945 cd/sqm



TEST NUMBER: P743230

CATALOG NUMBER: LD4D15D010-EU4DR350215IC9040-4LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	329.6	24.6
10°-20°	643.6	48.1
20°-30°	262.5	19.6
30°-40°	62.8	4.7
40°-50°	26.2	2.0
50°-60°	10.8	0.8
60°-70°	3.4	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1235.6	92.3
0°-40°	1298.4	97.0
0°-60°	1335.5	99.7
0°-90°	1339.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1339.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3684	
5°	3584	330
15°	2431	644
25°	503	262
35°	93	63
45°	32	26
55°	12	11
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P743230

CATALOG NUMBER: LD4D15D010-EU4DR350215IC9040-4LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3684.2
2.5°	3662.2
5°	3584.0
7.5°	3428.1
10°	3193.2
12.5°	2862.5
15°	2430.9
17.5°	1903.1
20°	1341.3
22.5°	855.3
25°	503.3
27.5°	284.5
30°	179.4
32.5°	126.0
35°	93.0
37.5°	71.9
40°	56.8
42.5°	43.8
45°	32.0
47.5°	23.9
50°	18.5
52.5°	14.7
55°	11.6
57.5°	9.5
60°	7.4
62.5°	5.4
65°	3.4
67.5°	1.2
70°	0.2
72.5°	0.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.2
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)