

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744680

Luminaire Tested: LD4D20D010-EU4DR6520359035-4LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P744680  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D20D010-EU4DR6520359035-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1744.9 lumens  
Efficiency: N/A  
Efficacy: 75.5 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 23.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P744680  
CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBCSSQMW

### Luminous Intensity Polar Plot

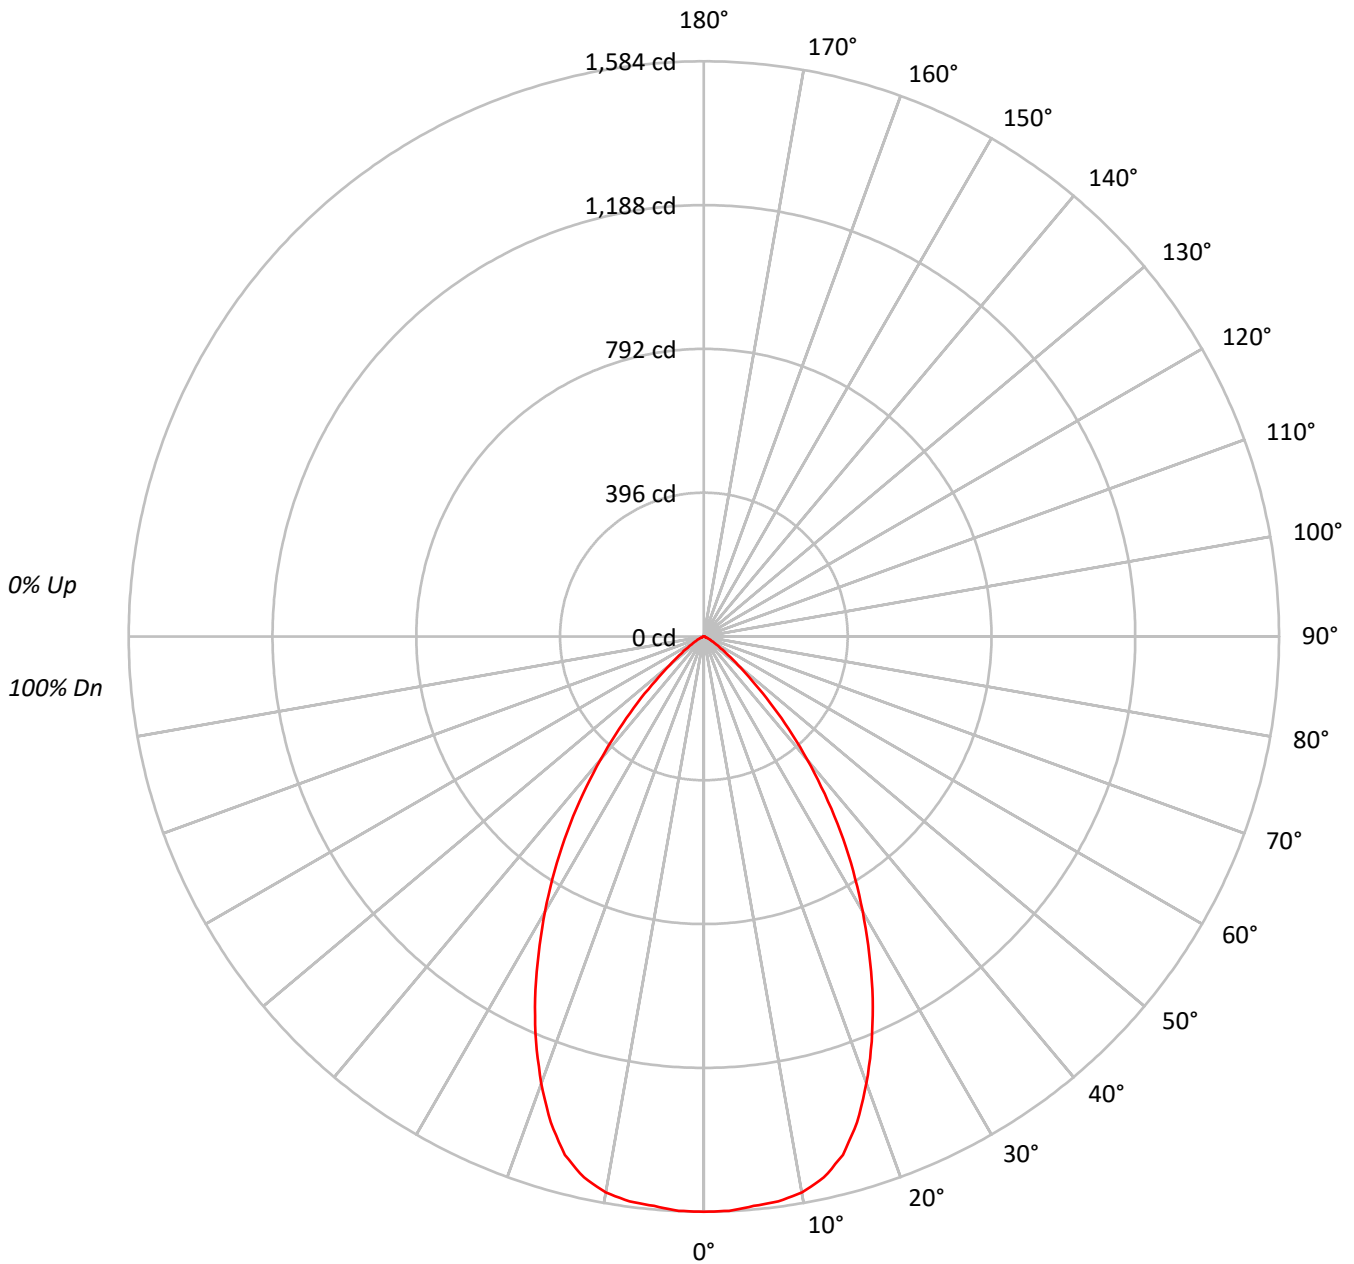



TEST NUMBER: P744680

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78															
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72				72															
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66				66															
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61				61															
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56				56															
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52				52															
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49				49															
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46				46															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	92529
5°	92302
10°	92219
15°	89378
20°	81363
25°	70905
30°	58975
35°	46729
40°	33729
45°	21301
50°	11103
55°	5906
60°	3095
65°	1700
70°	717
75°	790
80°	538
85°	469

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21301 cd/sqm



TEST NUMBER: P744680

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	149.8	8.6
10°-20°	410.3	23.5
20°-30°	501.5	28.7
30°-40°	406.9	23.3
40°-50°	202.7	11.6
50°-60°	56.6	3.2
60°-70°	12.8	0.7
70°-80°	3.3	0.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1061.6	60.8
0°-40°	1468.6	84.2
0°-60°	1727.9	99.0
0°-90°	1744.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1744.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1584	
5°	1574	150
15°	1478	410
25°	1100	502
35°	655	407
45°	258	203
55°	58	57
65°	12	13
75°	4	3
85°	1	1
90°	0	



TEST NUMBER: P744680

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1584.3
2.5°	1583.2
5°	1574.4
7.5°	1569.2
10°	1555.0
12.5°	1526.2
15°	1478.2
17.5°	1403.2
20°	1309.1
22.5°	1207.7
25°	1100.3
27.5°	985.5
30°	874.5
32.5°	764.8
35°	655.4
37.5°	546.2
40°	442.4
42.5°	345.0
45°	257.9
47.5°	179.7
50°	122.2
52.5°	84.3
55°	58.0
57.5°	39.1
60°	26.5
62.5°	18.4
65°	12.3
67.5°	6.3
70°	4.2
72.5°	4.0
75°	3.5
77.5°	2.3
80°	1.6
82.5°	1.1
85°	0.7
87.5°	0.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)