

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744301

Luminaire Tested: LD4D20D010-EU4DR4020359040-4LBCSSQMB

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P744301  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D20D010-EU4DR4020359040-4LBCSSQMB  
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1968.9 lumens  
Efficiency: N/A  
Efficacy: 85.2 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 23.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P744301  
CATALOG NUMBER: LD4D20D010-EU4DR4020359040-4LBCSSQMB

### Luminous Intensity Polar Plot

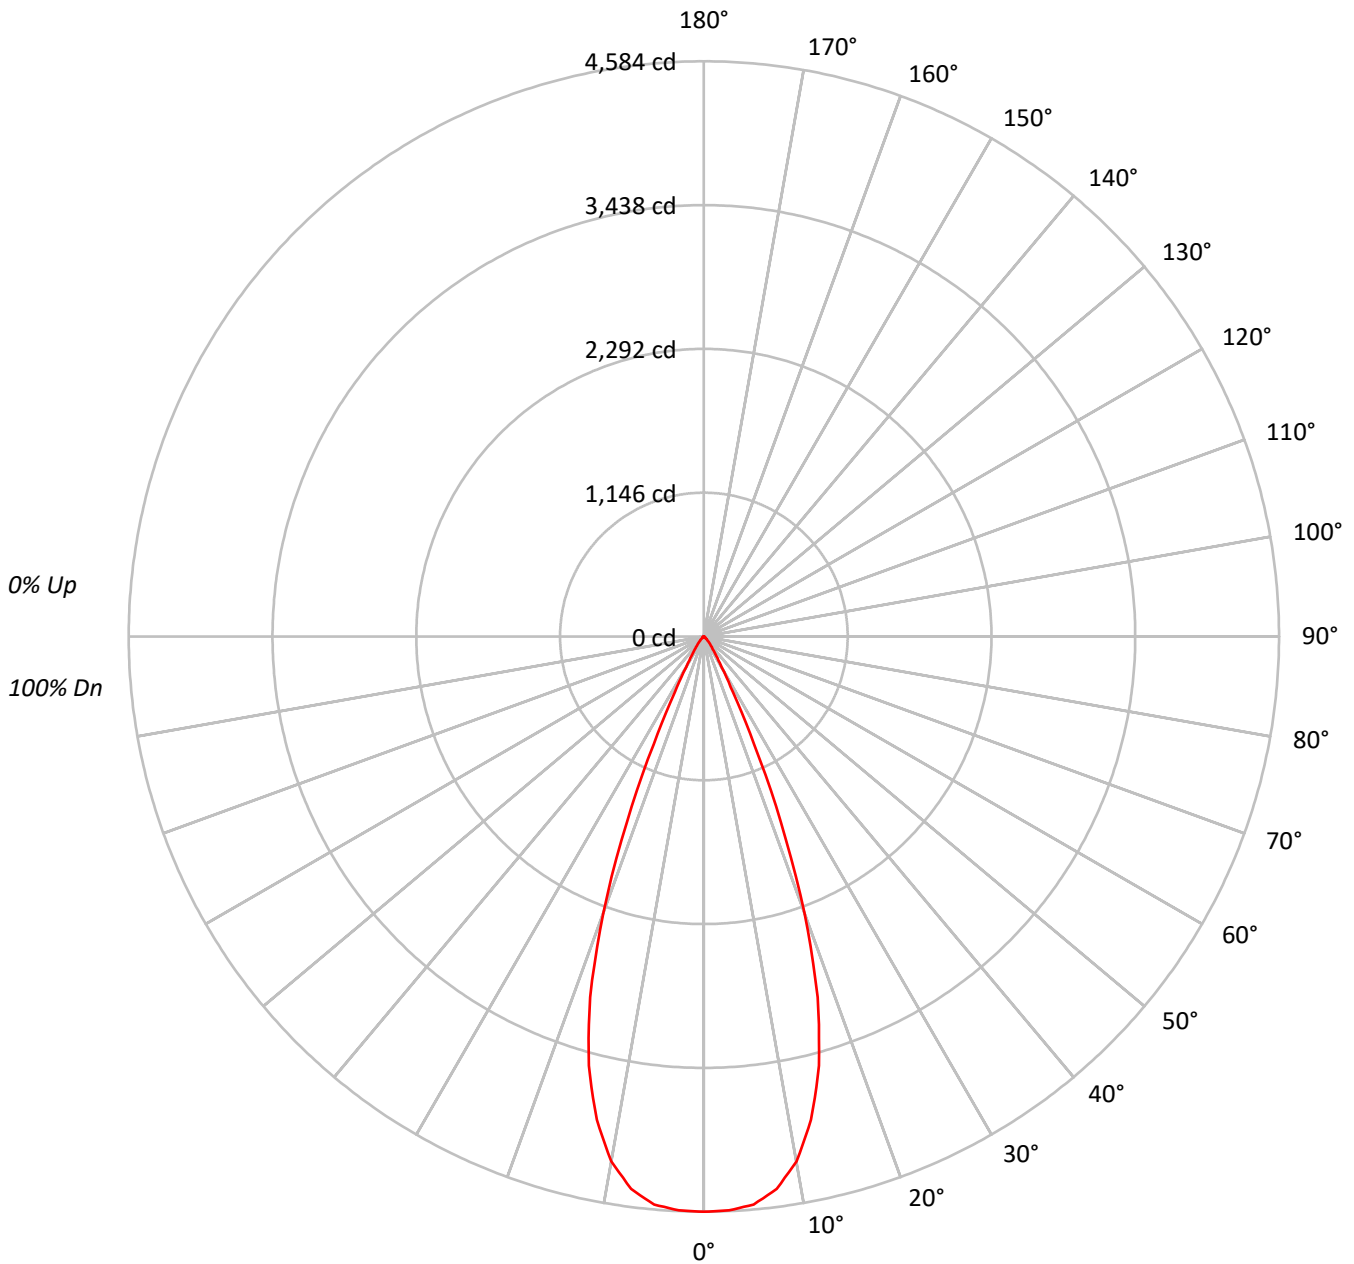



TEST NUMBER: P744301

CATALOG NUMBER: LD4D20D010-EU4DR4020359040-4LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |
| 1   | 115 | 112 | 110 | 108 | 112 | 110 | 108 | 107 | 106 | 105 | 103 | 103 | 101 | 100 | 99  | 98  | 97  | 96  |    |    | 96  |
| 2   | 110 | 106 | 103 | 100 | 108 | 105 | 102 | 99  | 102 | 99  | 97  | 99  | 97  | 95  | 96  | 95  | 93  | 92  |    |    | 92  |
| 3   | 106 | 101 | 97  | 94  | 104 | 100 | 96  | 93  | 97  | 94  | 92  | 95  | 93  | 90  | 93  | 91  | 89  | 88  |    |    | 88  |
| 4   | 102 | 97  | 92  | 89  | 101 | 95  | 91  | 88  | 93  | 90  | 87  | 92  | 89  | 86  | 90  | 87  | 85  | 84  |    |    | 84  |
| 5   | 99  | 92  | 88  | 84  | 97  | 91  | 87  | 84  | 90  | 86  | 83  | 88  | 85  | 83  | 87  | 84  | 82  | 81  |    |    | 81  |
| 6   | 95  | 88  | 84  | 80  | 94  | 88  | 83  | 80  | 86  | 82  | 80  | 85  | 82  | 79  | 84  | 81  | 79  | 77  |    |    | 77  |
| 7   | 92  | 85  | 80  | 77  | 91  | 84  | 80  | 77  | 83  | 79  | 76  | 82  | 79  | 76  | 81  | 78  | 76  | 74  |    |    | 74  |
| 8   | 89  | 82  | 77  | 74  | 88  | 81  | 77  | 74  | 80  | 76  | 73  | 79  | 76  | 73  | 78  | 75  | 73  | 72  |    |    | 72  |
| 9   | 86  | 79  | 74  | 71  | 85  | 78  | 74  | 71  | 77  | 73  | 71  | 76  | 73  | 70  | 76  | 72  | 70  | 69  |    |    | 69  |
| 10  | 83  | 76  | 71  | 68  | 82  | 75  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 68  | 73  | 70  | 68  | 67  |    |    | 67  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 500873 |
| 5°  | 498443 |
| 10° | 471133 |
| 15° | 400529 |
| 20° | 272985 |
| 25° | 113901 |
| 30° | 35818  |
| 35° | 16646  |
| 40° | 9200   |
| 45° | 4218   |
| 50° | 2040   |
| 55° | 1124   |
| 60° | 590    |
| 65° | 207    |
| 70° | 96     |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4218 cd/sqm



TEST NUMBER: P744301

CATALOG NUMBER: LD4D20D010-EU4DR4020359040-4LBCSSQMB

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 424.3  | 21.6      |
| 10°-20°   | 950.7  | 48.3      |
| 20°-30°   | 475.9  | 24.2      |
| 30°-40°   | 87.2   | 4.4       |
| 40°-50°   | 24.1   | 1.2       |
| 50°-60°   | 5.6    | 0.3       |
| 60°-70°   | 1.1    | 0.1       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1850.9 | 94.0      |
| 0°-40°    | 1938.1 | 98.4      |
| 0°-60°    | 1967.8 | 99.9      |
| 0°-90°    | 1968.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1968.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 4584 |      |
| 5°  | 4545 | 424  |
| 15° | 3541 | 951  |
| 25° | 945  | 476  |
| 35° | 125  | 87   |
| 45° | 27   | 24   |
| 55° | 6    | 6    |
| 65° | 1    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P744301

CATALOG NUMBER: LD4D20D010-EU4DR4020359040-4LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 4584.2 |
| 2.5°  | 4577.5 |
| 5°    | 4544.6 |
| 7.5°  | 4439.6 |
| 10°   | 4246.5 |
| 12.5° | 3945.5 |
| 15°   | 3540.9 |
| 17.5° | 3014.6 |
| 20°   | 2347.8 |
| 22.5° | 1600.7 |
| 25°   | 944.8  |
| 27.5° | 499.4  |
| 30°   | 283.9  |
| 32.5° | 183.5  |
| 35°   | 124.8  |
| 37.5° | 89.2   |
| 40°   | 64.5   |
| 42.5° | 44.2   |
| 45°   | 27.3   |
| 47.5° | 17.4   |
| 50°   | 12.0   |
| 52.5° | 8.6    |
| 55°   | 5.9    |
| 57.5° | 3.7    |
| 60°   | 2.7    |
| 62.5° | 1.6    |
| 65°   | 0.8    |
| 67.5° | 0.5    |
| 70°   | 0.3    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)