

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744625

Luminaire Tested: LD4D20D010-EU4DR6020359040-4LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P744625
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D20D010-EU4DR6020359040-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1803.3 lumens
Efficiency: N/A
Efficacy: 78.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744625

CATALOG NUMBER: LD4D20D010-EU4DR6020359040-4LBSQW1MW

Luminous Intensity Polar Plot

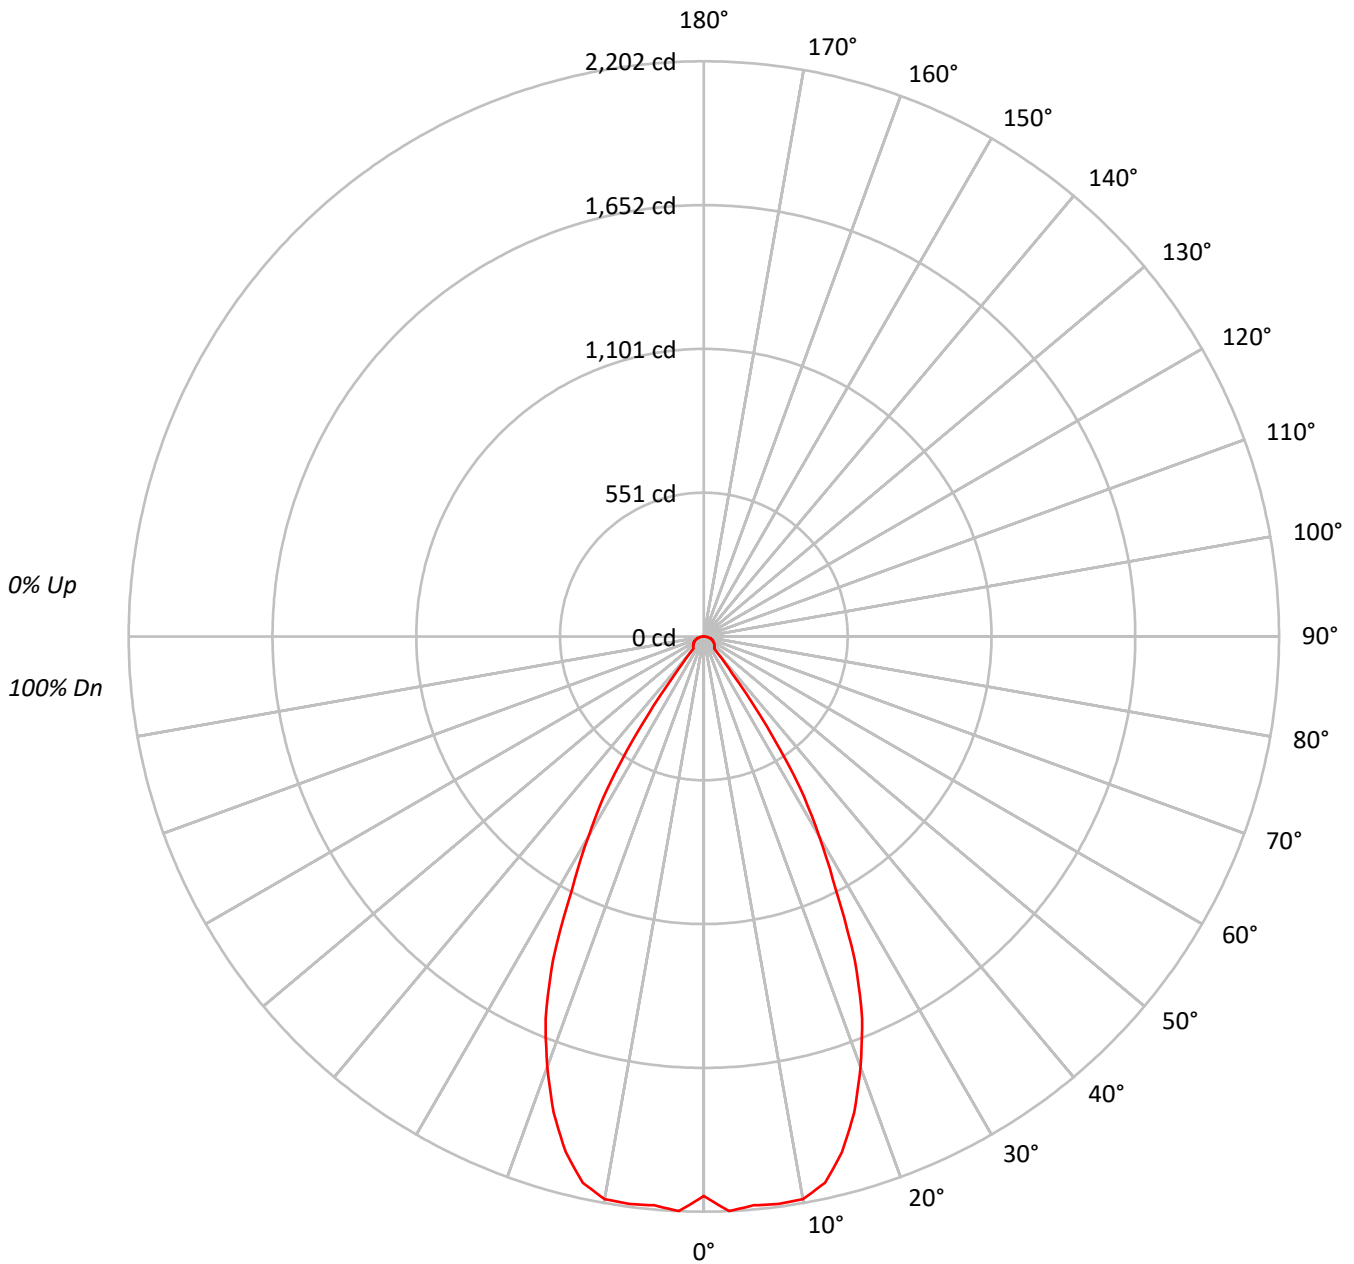



TEST NUMBER: P744625

CATALOG NUMBER: LD4D20D010-EU4DR6020359040-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	233993
5°	239745
10°	242651
15°	231151
20°	203803
25°	164836
30°	111503
35°	55874
40°	9057
45°	8869
50°	9043
55°	9182
60°	9440
65°	9669
70°	9871
75°	10005
80°	9690
85°	8023

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 10005 cd/sqm



TEST NUMBER: P744625

CATALOG NUMBER: LD4D20D010-EU4DR6020359040-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	208.9	11.6
10°-20°	565.2	31.3
20°-30°	608.1	33.7
30°-40°	264.4	14.7
40°-50°	44.4	2.5
50°-60°	43.2	2.4
60°-70°	36.9	2.0
70°-80°	24.7	1.4
80°-90°	7.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1382.3	76.7
0°-40°	1646.7	91.3
0°-60°	1734.2	96.2
0°-90°	1803.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1803.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2142	
5°	2186	209
15°	2044	565
25°	1367	608
35°	419	264
45°	57	44
55°	48	43
65°	37	37
75°	24	25
85°	6	7
90°	0	



TEST NUMBER: P744625

CATALOG NUMBER: LD4D20D010-EU4DR6020359040-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2141.6
2.5°	2201.8
5°	2185.9
7.5°	2191.0
10°	2187.1
12.5°	2141.9
15°	2043.5
17.5°	1911.4
20°	1752.8
22.5°	1583.1
25°	1367.3
27.5°	1093.6
30°	883.8
32.5°	681.2
35°	418.9
37.5°	179.2
40°	63.5
42.5°	58.6
45°	57.4
47.5°	55.5
50°	53.2
52.5°	50.7
55°	48.2
57.5°	45.7
60°	43.2
62.5°	40.4
65°	37.4
67.5°	34.3
70°	30.9
72.5°	27.3
75°	23.7
77.5°	19.5
80°	15.4
82.5°	10.9
85°	6.4
87.5°	2.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)