

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P738911

Luminaire Tested: LD4D02D010-EU4DR200210IC9024-4LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P738911
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D02D010-EU4DR200210IC9024-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 278.5 lumens
Efficiency: N/A
Efficacy: 54.6 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P738911

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9024-4LBSQW1MW

Luminous Intensity Polar Plot

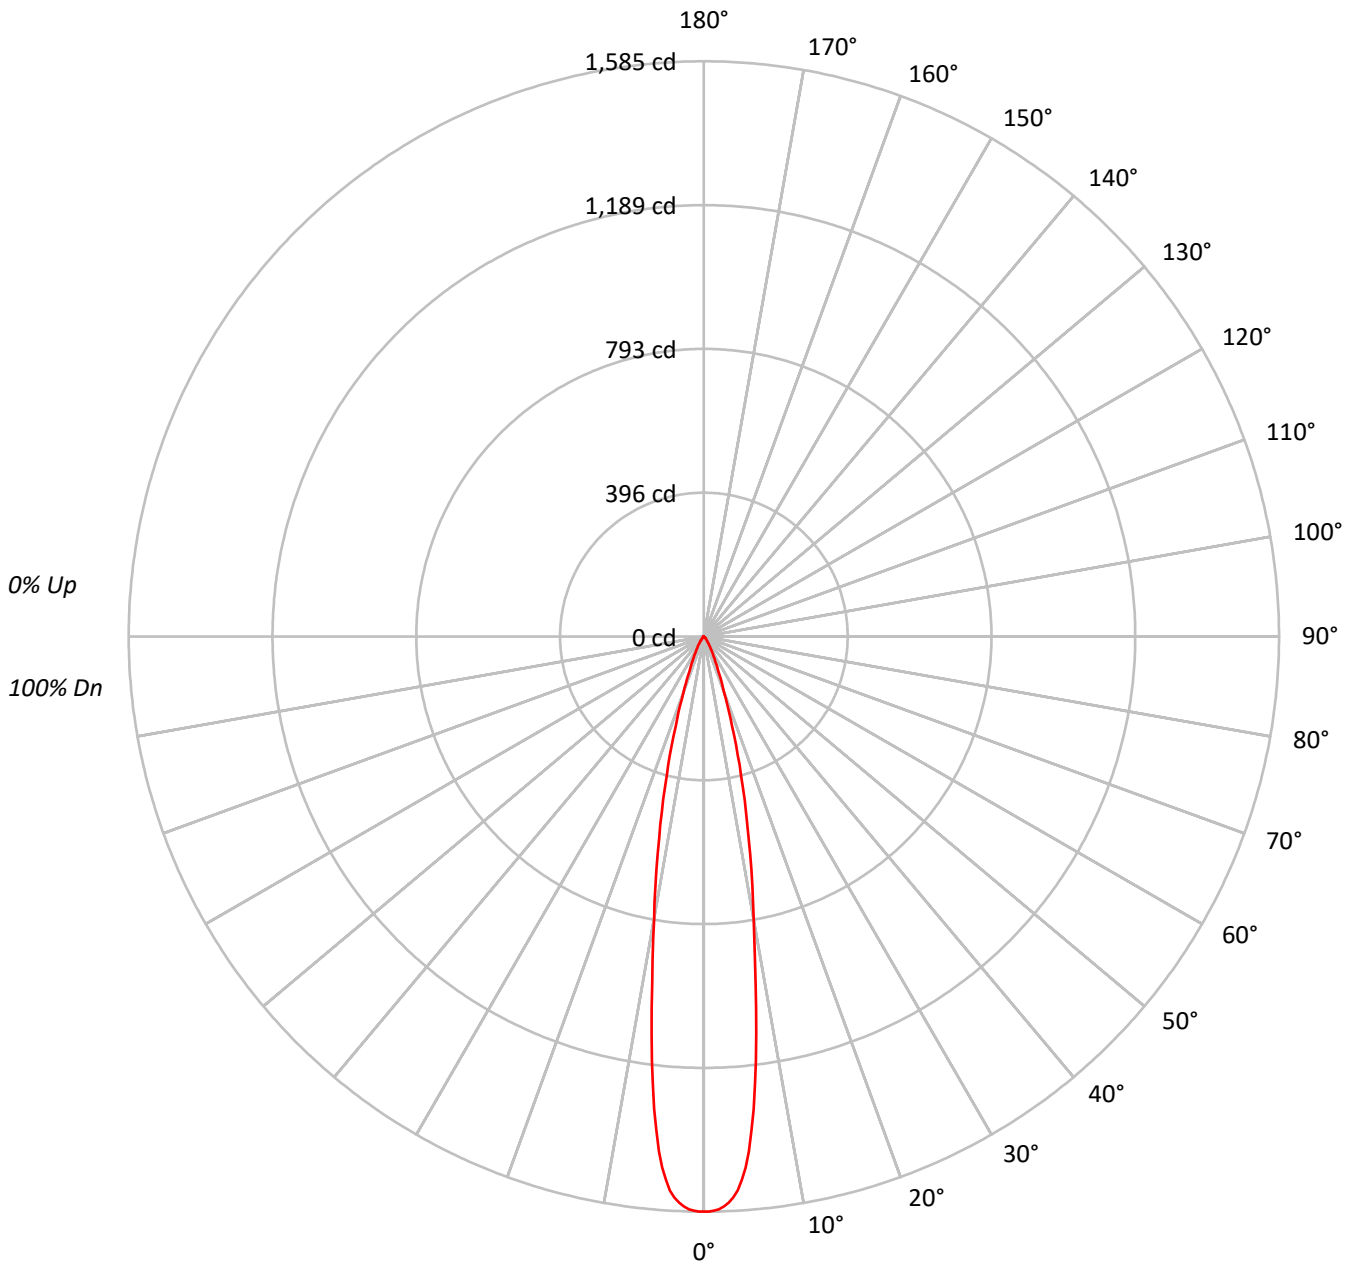



TEST NUMBER: P738911

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9024-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	173156
5°	156226
10°	87681
15°	44567
20°	18871
25°	8716
30°	4618
35°	2481
40°	1326
45°	788
50°	459
55°	248
60°	153
65°	103
70°	32
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 788 cd/sqm



TEST NUMBER: P738911

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9024-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.8	40.5
10°-20°	111.1	39.9
20°-30°	36.3	13.0
30°-40°	12.4	4.4
40°-50°	4.2	1.5
50°-60°	1.3	0.5
60°-70°	0.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	260.2	93.5
0°-40°	272.6	97.9
0°-60°	278.0	99.8
0°-90°	278.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	278.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1585	
5°	1424	113
15°	394	111
25°	72	36
35°	19	12
45°	5	4
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P738911

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9024-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1584.8
0.5°	1584.8
1°	1582.9
1.5°	1578.9
2°	1571.7
2.5°	1562.1
3°	1548.6
3.5°	1529.7
4°	1501.6
4.5°	1467.4
5°	1424.4
5.5°	1367.8
6°	1309.8
6.5°	1243.3
7°	1178.3
7.5°	1102.0
8°	1034.0
8.5°	965.6
9°	902.4
9.5°	844.4
10°	790.3
12.5°	567.5
15°	394.0
17.5°	257.4
20°	162.3
22.5°	105.1
25°	72.3
27.5°	50.8
30°	36.6
32.5°	26.2
35°	18.6
37.5°	13.0
40°	9.3
42.5°	6.8
45°	5.1
47.5°	4.0
50°	2.7
52.5°	1.7
55°	1.3
57.5°	1.0
60°	0.7
62.5°	0.6
65°	0.4



TEST NUMBER: P738911

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9024-4LBSQW1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		0.3
70°		0.1

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)