

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739716

Luminaire Tested: LD4D02D010-EU4DR700210IC9030-4LBSQW1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P739716  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D02D010-EU4DR700210IC9030-4LBSQW1B  
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 217.4 lumens  
Efficiency: N/A  
Efficacy: 42.6 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P739716  
CATALOG NUMBER: LD4D02D010-EU4DR700210IC9030-4LBSQW1B

### Luminous Intensity Polar Plot

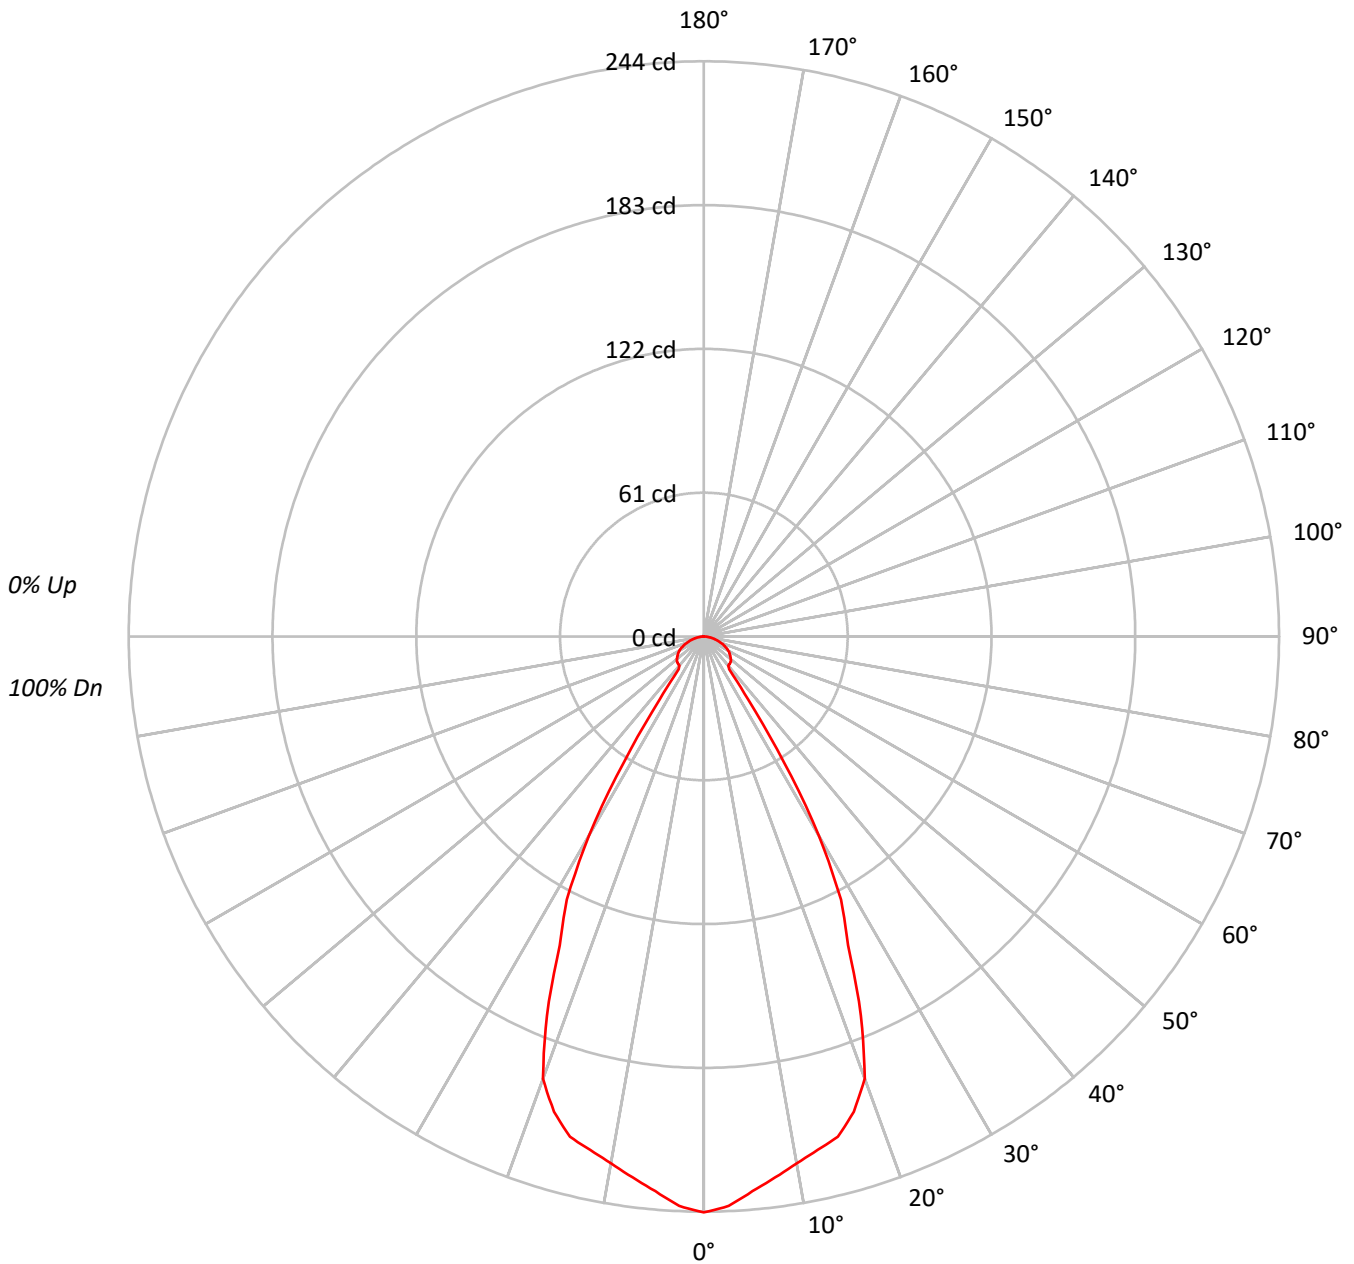



TEST NUMBER: P739716  
 CATALOG NUMBER: LD4D02D010-EU4DR700210IC9030-4LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			70
5	89	80	74	69	87	79	73	68	77	72	68	75	71	67	74	70	67	65			65
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			53
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			50
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	26692
5°	25906
10°	25174
15°	24851
20°	23208
25°	17432
30°	12326
35°	4362
40°	2296
45°	2441
50°	2533
55°	2572
60°	2600
65°	2534
70°	2396
75°	2237
80°	2013
85°	1630

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 2603 cd/sqm



TEST NUMBER: P739716

CATALOG NUMBER: LD4D02D010-EU4DR700210IC9030-4LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	22.3	10.2
10°-20°	61.1	28.1
20°-30°	67.3	31.0
30°-40°	25.7	11.8
40°-50°	12.1	5.6
50°-60°	12.1	5.5
60°-70°	9.7	4.5
70°-80°	5.6	2.6
80°-90°	1.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	150.7	69.3
0°-40°	176.4	81.1
0°-60°	200.6	92.3
0°-90°	217.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	217.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	244	
5°	236	22
15°	220	61
25°	145	67
35°	33	26
45°	16	12
55°	14	12
65°	10	10
75°	5	6
85°	1	2
90°	0	



TEST NUMBER: P739716

CATALOG NUMBER: LD4D02D010-EU4DR700210IC9030-4LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	244.3
2.5°	241.8
5°	236.2
7.5°	231.5
10°	226.9
12.5°	223.1
15°	219.7
17.5°	211.4
20°	199.6
22.5°	174.1
25°	144.6
27.5°	125.9
30°	97.7
32.5°	63.1
35°	32.7
37.5°	17.7
40°	16.1
42.5°	16.0
45°	15.8
47.5°	15.5
50°	14.9
52.5°	14.2
55°	13.5
57.5°	12.8
60°	11.9
62.5°	10.9
65°	9.8
67.5°	8.7
70°	7.5
72.5°	6.4
75°	5.3
77.5°	4.1
80°	3.2
82.5°	2.2
85°	1.3
87.5°	0.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)