

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739495

Luminaire Tested: LD4D02D010-EU4DR550210IC9035-4LBSQW1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P739495  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D02D010-EU4DR550210IC9035-4LBSQW1B  
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 55° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 305.9 lumens  
Efficiency: N/A  
Efficacy: 60.0 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P739495  
CATALOG NUMBER: LD4D02D010-EU4DR550210IC9035-4LBSQW1B

### Luminous Intensity Polar Plot

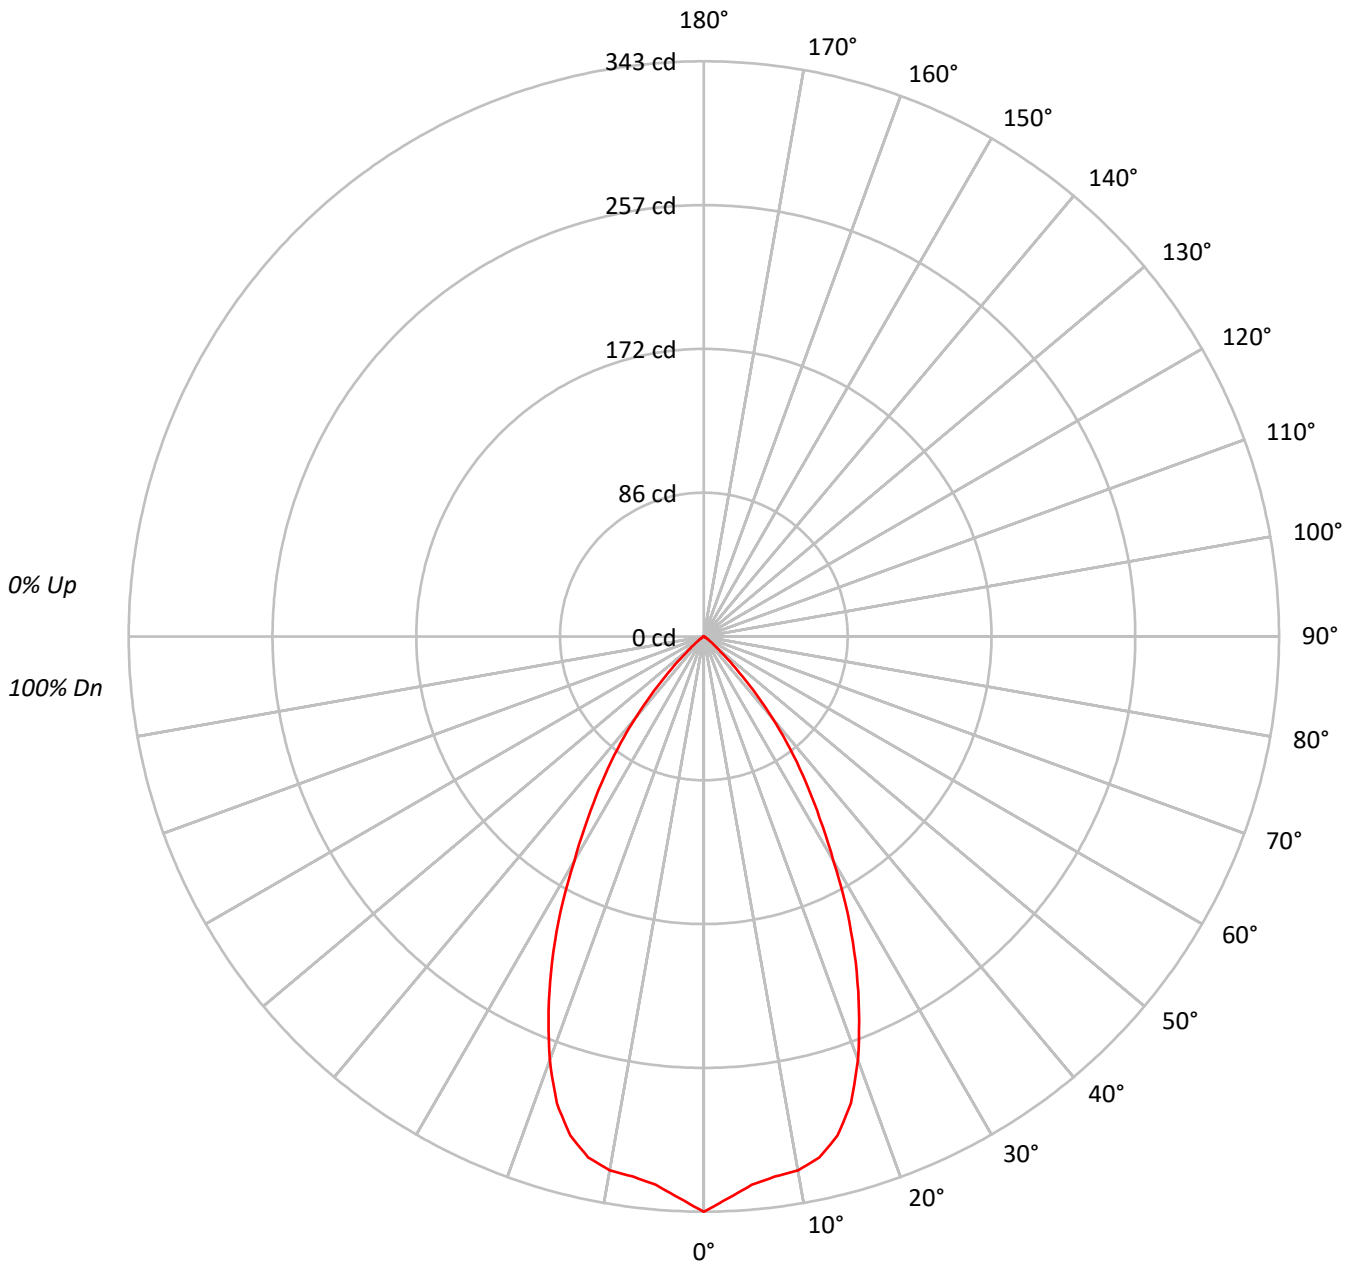



TEST NUMBER: P739495

CATALOG NUMBER: LD4D02D010-EU4DR550210IC9035-4LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	37487
5°	35996
10°	35869
15°	34839
20°	31231
25°	25811
30°	19492
35°	14139
40°	9043
45°	4141
50°	1360
55°	571
60°	240
65°	26
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4141 cd/sqm



TEST NUMBER: P739495

CATALOG NUMBER: LD4D02D010-EU4DR550210IC9035-4LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	31.2	10.2
10°-20°	85.2	27.9
20°-30°	97.1	31.7
30°-40°	66.1	21.6
40°-50°	22.8	7.4
50°-60°	3.1	1.0
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	213.6	69.8
0°-40°	279.7	91.4
0°-60°	305.6	99.9
0°-90°	305.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	305.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	343	
5°	328	31
15°	308	85
25°	214	97
35°	106	66
45°	27	23
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P739495

CATALOG NUMBER: LD4D02D010-EU4DR550210IC9035-4LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	343.1
2.5°	335.2
5°	328.2
7.5°	324.8
10°	323.3
12.5°	318.2
15°	308.0
17.5°	291.7
20°	268.6
22.5°	241.9
25°	214.1
27.5°	185.2
30°	154.5
32.5°	128.6
35°	106.0
37.5°	84.5
40°	63.4
42.5°	43.9
45°	26.8
47.5°	14.4
50°	8.0
52.5°	4.7
55°	3.0
57.5°	1.9
60°	1.1
62.5°	0.5
65°	0.1
67.5°	0.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)