

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739119

Luminaire Tested: LD4D02D010-EU4DR300210IC9040-4LBSQW1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P739119
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D02D010-EU4DR300210IC9040-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 310.4 lumens
Efficiency: N/A
Efficacy: 60.9 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739119
CATALOG NUMBER: LD4D02D010-EU4DR300210IC9040-4LBSQW1MW

Luminous Intensity Polar Plot

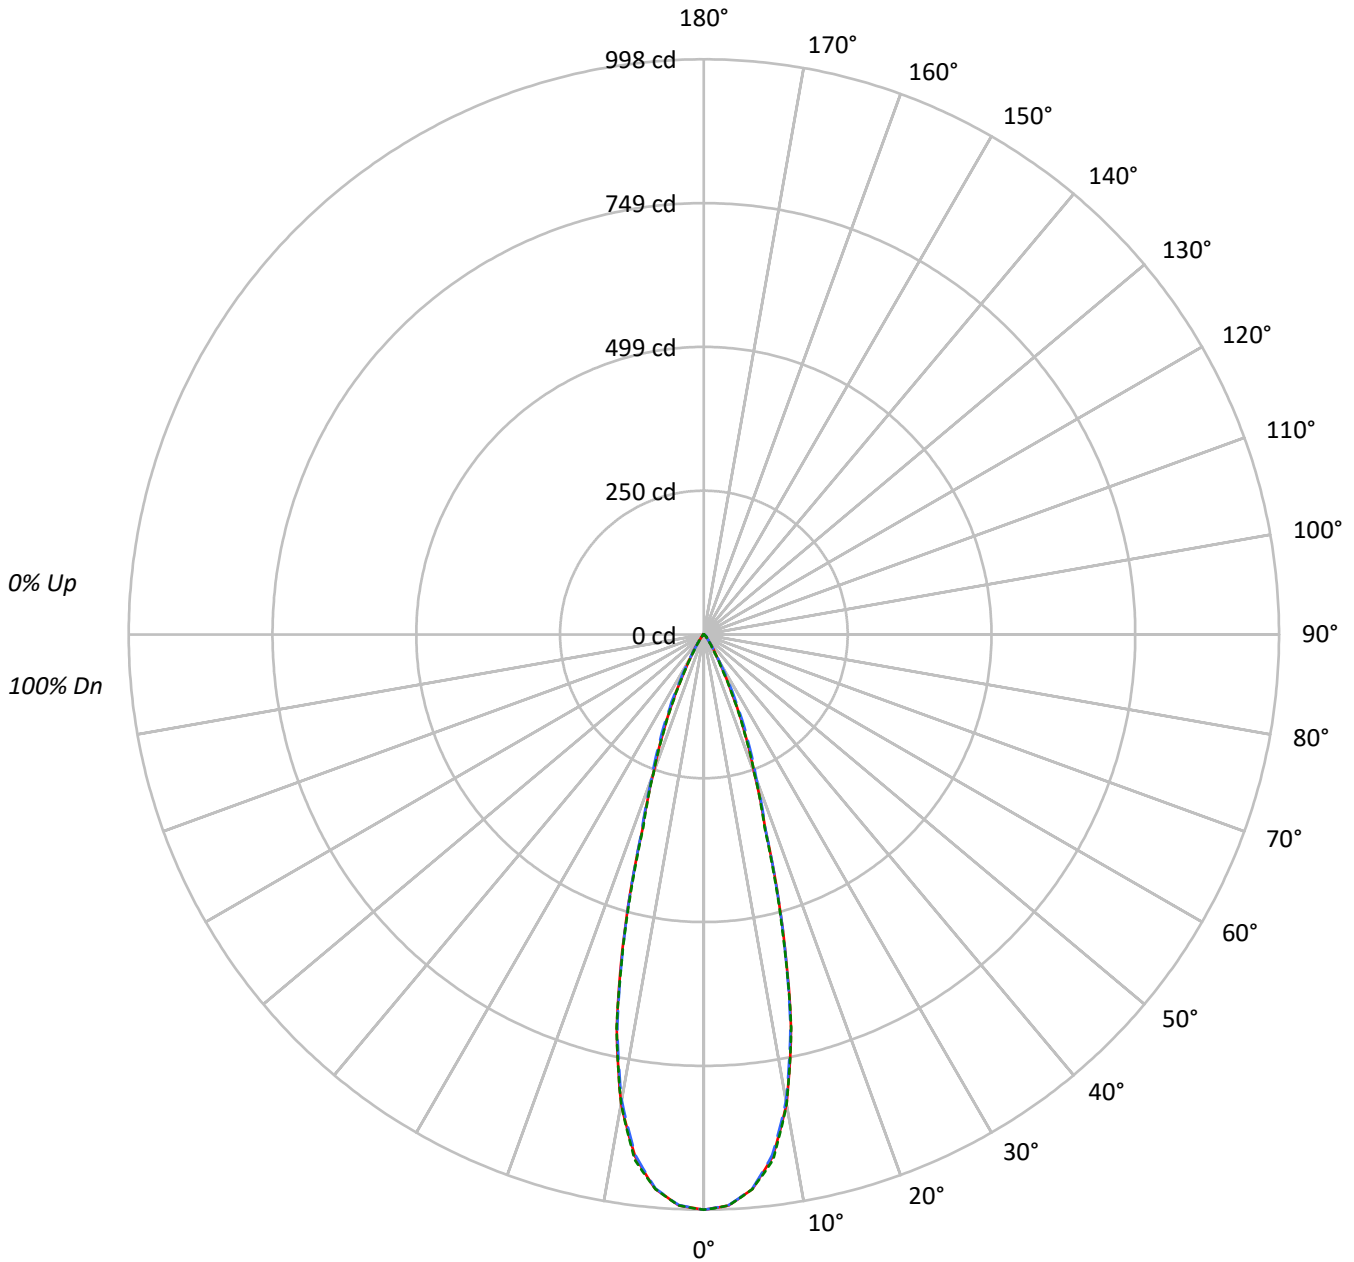



TEST NUMBER: P739119

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9040-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	76398	76398	76398
5°	74208	74123	74208
10°	64270	63827	64262
15°	41936	41714	41500
20°	20853	21635	20828
25°	10506	11849	10287
30°	4207	4587	3668
35°	1953	1869	1570
40°	839	929	799
45°	595	736	606
50°	202	536	214
55°	120	227	120
60°	77	92	77
65°	54	54	54
70°	45	22	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 736 cd/sqm



TEST NUMBER: P739119

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9040-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	87.8	28.3
10°-20°	141.4	45.5
20°-30°	61.1	19.7
30°-40°	13.9	4.5
40°-50°	4.8	1.5
50°-60°	1.2	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	290.2	93.5
0°-40°	304.1	98.0
0°-60°	310.1	99.9
0°-90°	310.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	310.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	998	998	998	998	998	
5°	966	965	965	967	966	88
15°	529	523	526	525	524	142
25°	124	129	140	126	122	60
35°	21	21	20	20	17	14
45°	6	7	7	7	6	4
55°	1	1	2	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P739119

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9040-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	998.1	998.1	998.1	998.1	998.1
2.5°	991.5	990.8	991.2	991.7	991.9
5°	965.8	964.8	964.7	966.7	965.8
7.5°	913.9	912.6	910.5	915.1	919.4
10°	826.9	825.5	821.2	823.3	826.8
12.5°	698.6	693.8	693.8	700.6	699.7
15°	529.2	522.8	526.4	524.7	523.7
17.5°	355.9	353.4	358.2	356.7	350.6
20°	256.0	256.6	265.6	261.1	255.7
22.5°	186.8	189.1	199.7	188.2	183.9
25°	124.4	129.1	140.3	125.8	121.8
27.5°	76.5	78.7	90.0	75.5	73.3
30°	47.6	46.5	51.9	44.5	41.5
32.5°	31.2	29.9	31.6	28.3	25.9
35°	20.9	21.3	20.0	19.8	16.8
37.5°	13.1	15.0	13.2	14.1	10.8
40°	8.4	10.9	9.3	10.3	8.0
42.5°	6.9	8.4	7.7	8.2	7.0
45°	5.5	6.8	6.8	6.8	5.6
47.5°	3.0	4.6	5.8	4.6	3.2
50°	1.7	2.3	4.5	2.4	1.8
52.5°	1.2	1.3	3.1	1.4	1.2
55°	0.9	0.9	1.7	1.0	0.9
57.5°	0.7	0.7	0.9	0.7	0.7
60°	0.5	0.5	0.6	0.6	0.5
62.5°	0.4	0.4	0.5	0.4	0.4
65°	0.3	0.3	0.3	0.3	0.3
67.5°	0.2	0.2	0.2	0.2	0.2
70°	0.2	0.1	0.1	0.1	0.2
72.5°	0.1	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)