

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P738897

Luminaire Tested: LD4D02D010-EU4DR150210IC9050-4LBSQW1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P738897
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D02D010-EU4DR150210IC9050-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 326.2 lumens
Efficiency: N/A
Efficacy: 64.0 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P738897
CATALOG NUMBER: LD4D02D010-EU4DR150210IC9050-4LBSQW1B

Luminous Intensity Polar Plot

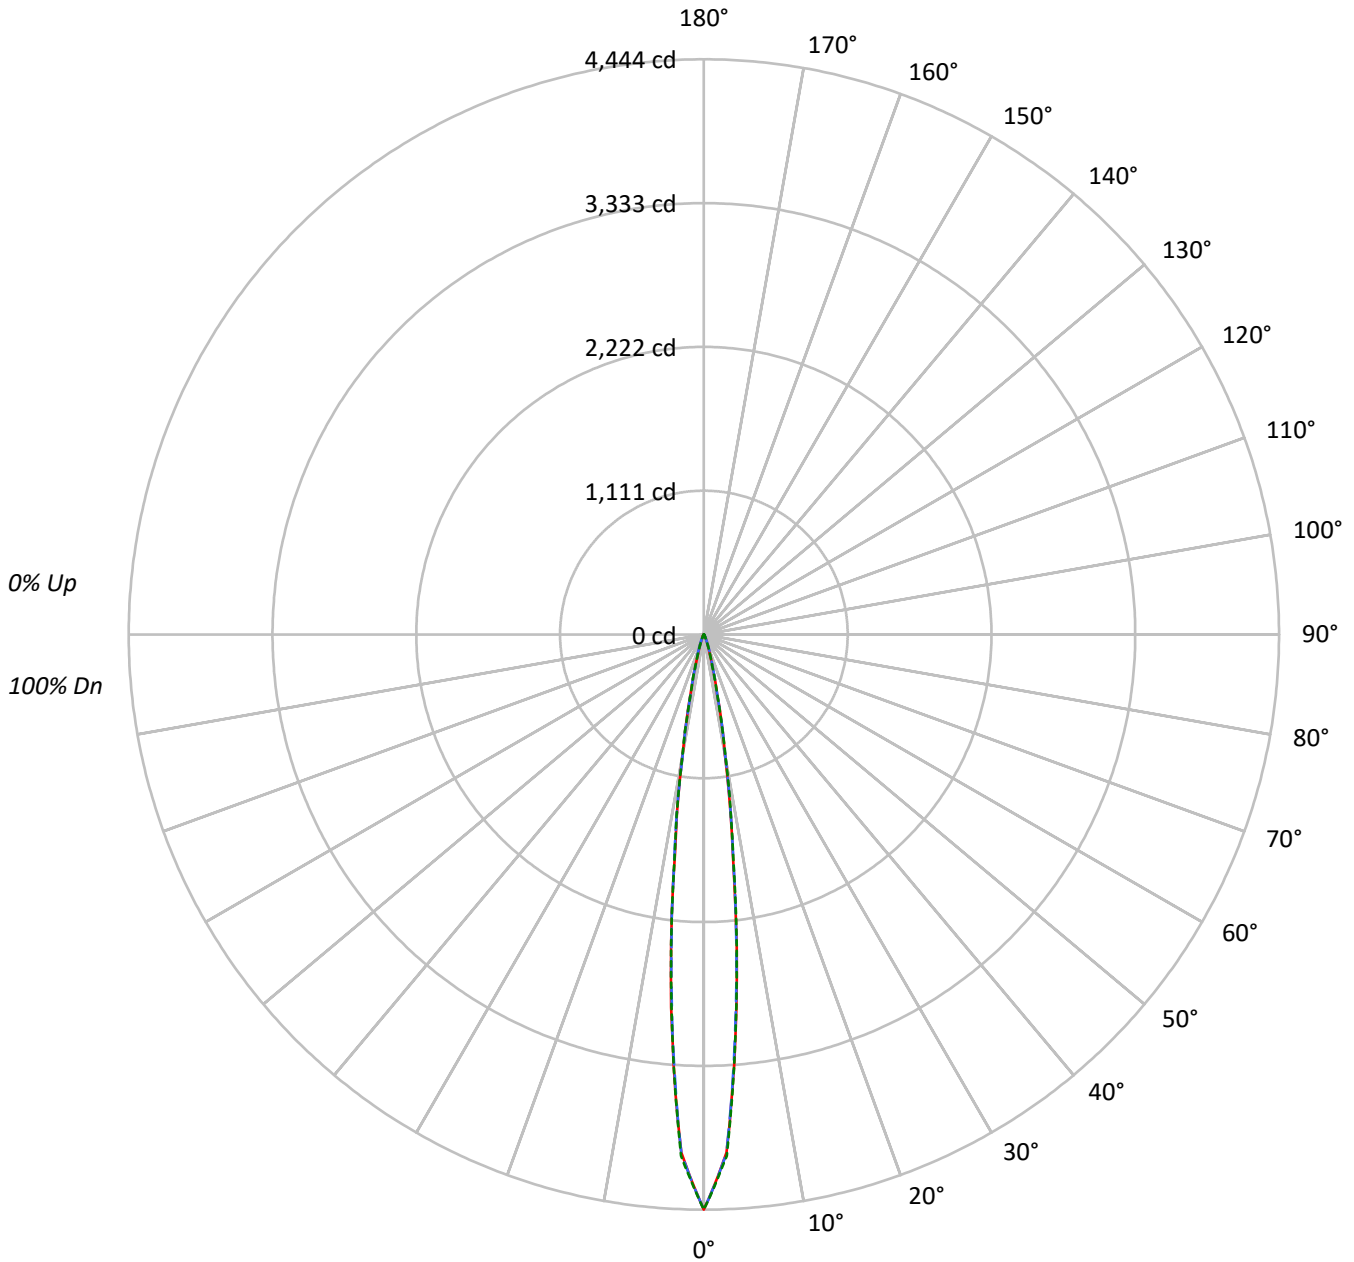



TEST NUMBER: P738897

CATALOG NUMBER: LD4D02D010-EU4DR150210IC9050-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	93	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	500005	500005	500005
5°	293829	290029	292315
10°	87690	88306	89659
15°	21810	22235	21549
20°	6529	7560	6669
25°	2298	2929	2329
30°	846	1116	861
35°	421	479	407
40°	270	291	270
45°	196	210	196
50°	160	160	160
55°	132	132	132
60°	105	105	105
65°	79	79	79
70°	66	66	66
75°	45	45	60
80°	32	32	32
85°	17	17	17

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 210 cd/sqm



TEST NUMBER: P738897

CATALOG NUMBER: LD4D02D010-EU4DR150210IC9050-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	211.5	64.8
10°-20°	87.0	26.7
20°-30°	17.3	5.3
30°-40°	4.3	1.3
40°-50°	2.3	0.7
50°-60°	1.7	0.5
60°-70°	1.2	0.4
70°-80°	0.7	0.2
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	315.8	96.8
0°-40°	320.1	98.1
0°-60°	324.1	99.4
0°-90°	326.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	326.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4444	4444	4444	4444	4444	
5°	2891	2862	2854	2874	2876	211
15°	251	256	256	252	248	86
25°	30	34	38	33	30	16
35°	6	6	7	6	6	4
45°	3	3	3	3	3	2
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P738897

CATALOG NUMBER: LD4D02D010-EU4DR150210IC9050-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4443.7	4443.7	4443.7	4443.7	4443.7
2.5°	4008.4	4011.8	4013.1	4017.1	4031.7
5°	2891.2	2861.5	2853.8	2873.5	2876.3
7.5°	1712.6	1718.6	1740.7	1745.5	1727.9
10°	939.8	947.6	946.4	953.2	960.9
12.5°	480.6	474.6	472.7	480.5	469.7
15°	251.1	255.8	256.0	251.5	248.1
17.5°	135.1	140.5	149.6	142.2	130.9
20°	79.8	84.7	92.4	86.3	81.5
22.5°	49.3	53.2	58.7	54.0	50.0
25°	29.5	33.5	37.6	33.3	29.9
27.5°	17.5	20.9	23.5	20.7	17.3
30°	11.3	13.2	14.9	13.0	11.5
32.5°	7.9	8.7	9.4	8.7	7.9
35°	5.8	6.2	6.6	6.2	5.6
37.5°	4.5	4.9	5.1	4.7	4.3
40°	3.8	4.0	4.1	4.0	3.8
42.5°	3.2	3.4	3.4	3.4	3.2
45°	2.8	2.8	3.0	2.8	2.8
47.5°	2.4	2.4	2.6	2.4	2.4
50°	2.3	2.3	2.3	2.3	2.3
52.5°	2.1	2.1	2.1	2.1	2.1
55°	1.9	1.9	1.9	1.9	1.9
57.5°	1.7	1.7	1.7	1.7	1.7
60°	1.5	1.5	1.5	1.5	1.5
62.5°	1.3	1.3	1.3	1.3	1.3
65°	1.1	1.1	1.1	1.1	1.1
67.5°	1.1	1.1	1.1	1.1	1.1
70°	0.9	0.9	0.9	0.9	0.9
72.5°	0.8	0.8	0.8	0.8	0.8
75°	0.6	0.6	0.6	0.6	0.8
77.5°	0.6	0.6	0.6	0.6	0.6
80°	0.4	0.4	0.4	0.4	0.4
82.5°	0.4	0.4	0.4	0.4	0.4
85°	0.2	0.2	0.2	0.2	0.2
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)