

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739600

Luminaire Tested: LD4D02D010-EU4DR600210IC9050-4LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P739600
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D02D010-EU4DR600210IC9050-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 336.9 lumens
Efficiency: N/A
Efficacy: 66.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.84
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739600
CATALOG NUMBER: LD4D02D010-EU4DR600210IC9050-4LBSQW1MW

Luminous Intensity Polar Plot

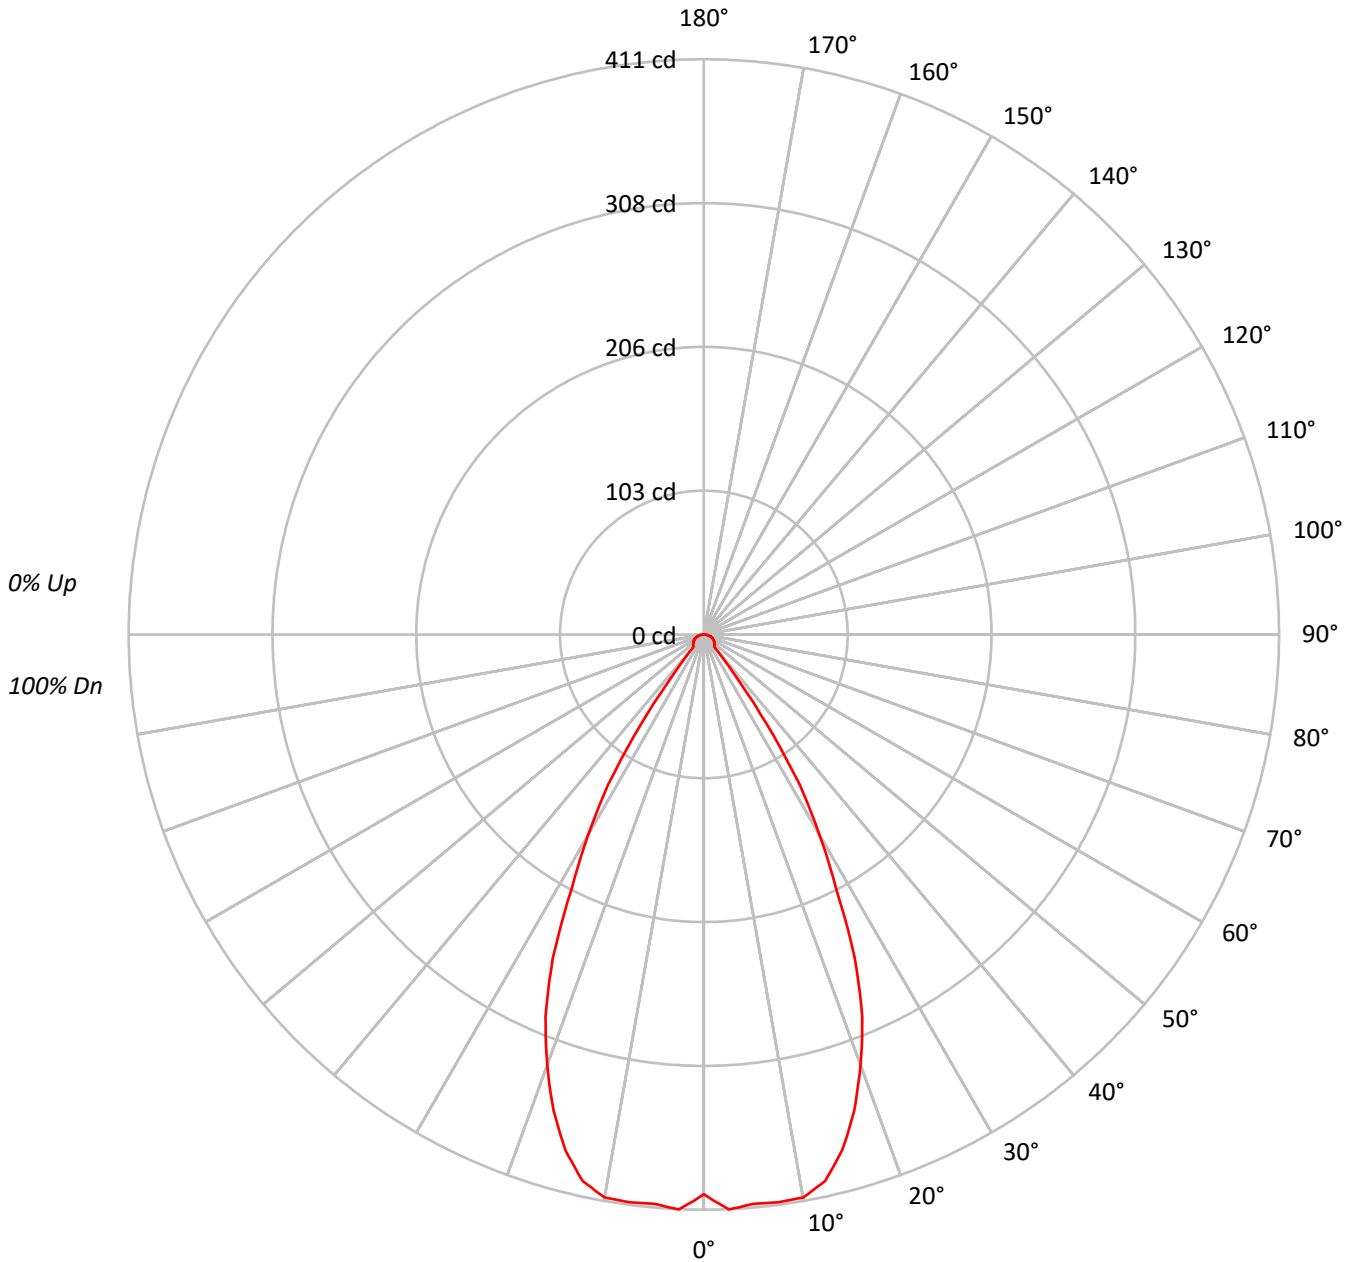



TEST NUMBER: P739600

CATALOG NUMBER: LD4D02D010-EU4DR600210IC9050-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93															
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86				86															
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80				80															
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75				75															
5	92	84	78	74	91	83	78	74	81	77	73	80	75	72	78	74	72	70				70															
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66				66															
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	70	67	63	62				62															
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59				59															
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55				55															
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	52				52															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	43704
5°	44782
10°	45322
15°	43176
20°	38068
25°	30790
30°	20830
35°	10444
40°	1697
45°	1653
50°	1700
55°	1714
60°	1770
65°	1810
70°	1853
75°	1857
80°	1825
85°	1504

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 77.5°
 Luminance: 1868 cd/sqm



TEST NUMBER: P739600

CATALOG NUMBER: LD4D02D010-EU4DR600210IC9050-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.0	11.6
10°-20°	105.6	31.3
20°-30°	113.6	33.7
30°-40°	49.4	14.7
40°-50°	8.3	2.5
50°-60°	8.1	2.4
60°-70°	6.9	2.1
70°-80°	4.6	1.4
80°-90°	1.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	258.2	76.6
0°-40°	307.6	91.3
0°-60°	324.0	96.2
0°-90°	336.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	336.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	400	
5°	408	39
15°	382	106
25°	255	114
35°	78	49
45°	11	8
55°	9	8
65°	7	7
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P739600

CATALOG NUMBER: LD4D02D010-EU4DR600210IC9050-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	400.0
2.5°	411.3
5°	408.3
7.5°	409.2
10°	408.5
12.5°	400.0
15°	381.7
17.5°	357.0
20°	327.4
22.5°	295.7
25°	255.4
27.5°	204.3
30°	165.1
32.5°	127.3
35°	78.3
37.5°	33.5
40°	11.9
42.5°	10.9
45°	10.7
47.5°	10.4
50°	10.0
52.5°	9.5
55°	9.0
57.5°	8.5
60°	8.1
62.5°	7.6
65°	7.0
67.5°	6.4
70°	5.8
72.5°	5.1
75°	4.4
77.5°	3.7
80°	2.9
82.5°	2.0
85°	1.2
87.5°	0.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)