

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744806

Luminaire Tested: LD4D25D010-EU4DR1515309024-4LBSQW1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744806
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR1515309024-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1814.6 lumens
Efficiency: N/A
Efficacy: 72.3 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744806

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBSQW1B

Luminous Intensity Polar Plot

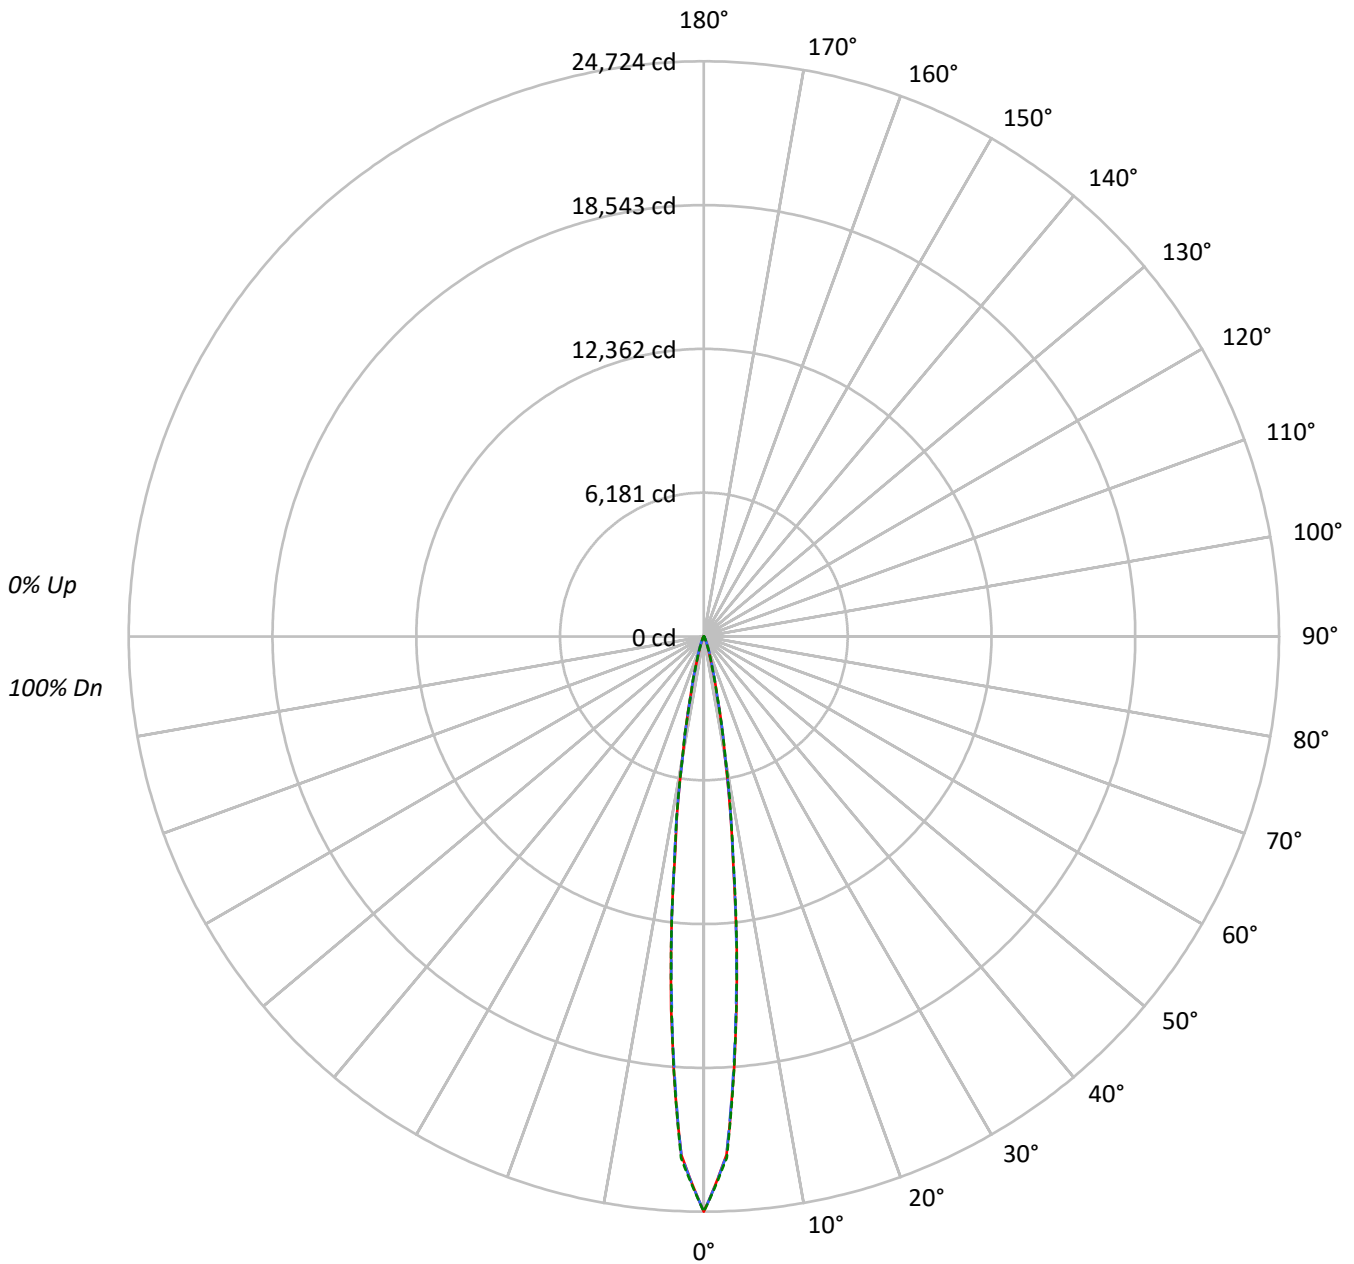



TEST NUMBER: P744806

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98				98															
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96				96															
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94				94															
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93				93															
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92				92															
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90				90															
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89				89															
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88				88															
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87				87															
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86				86															

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2781988	2781988	2781988
5°	1634823	1613664	1626428
10°	487924	491339	498860
15°	121365	123728	119915
20°	36313	42049	37082
25°	12799	16305	12963
30°	4703	6193	4777
35°	2353	2658	2280
40°	1484	1633	1484
45°	1099	1169	1099
50°	876	876	876
55°	731	731	731
60°	590	590	590
65°	450	450	450
70°	380	380	380
75°	234	234	317
80°	166	166	166
85°	83	83	83

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 1169 cd/sqm



TEST NUMBER: P744806

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1176.9	64.9
10°-20°	484.1	26.7
20°-30°	96.2	5.3
30°-40°	24.0	1.3
40°-50°	12.6	0.7
50°-60°	9.4	0.5
60°-70°	6.6	0.4
70°-80°	3.7	0.2
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1757.2	96.8
0°-40°	1781.2	98.2
0°-60°	1803.2	99.4
0°-90°	1814.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1814.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	24724	24724	24724	24724	24724	
5°	16086	15921	15878	15988	16004	1175
15°	1397	1424	1424	1399	1381	479
25°	164	186	209	185	166	86
35°	32	34	37	34	31	22
45°	16	16	17	16	16	12
55°	10	10	10	10	10	9
65°	6	6	6	6	6	7
75°	3	3	3	3	4	4
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P744806

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	24724.4	24724.4	24724.4	24724.4	24724.4
2.5°	22302.4	22321.2	22328.6	22350.6	22432.2
5°	16086.2	15920.9	15878.0	15987.9	16003.6
7.5°	9528.9	9562.4	9684.8	9712.0	9613.6
10°	5229.2	5272.1	5265.8	5303.5	5346.4
12.5°	2674.2	2640.7	2630.3	2673.2	2613.5
15°	1397.3	1423.5	1424.5	1399.4	1380.6
17.5°	751.5	781.9	832.1	791.3	728.5
20°	443.8	471.0	513.9	480.4	453.2
22.5°	274.2	296.2	326.6	300.4	278.4
25°	164.3	186.3	209.3	185.3	166.4
27.5°	97.3	116.2	130.8	115.1	96.3
30°	62.8	73.3	82.7	72.2	63.8
32.5°	44.0	48.1	52.3	48.1	44.0
35°	32.4	34.5	36.6	34.5	31.4
37.5°	25.1	27.2	28.3	26.2	24.1
40°	20.9	22.0	23.0	22.0	20.9
42.5°	17.8	18.8	18.8	18.8	17.8
45°	15.7	15.7	16.7	15.7	15.7
47.5°	13.6	13.6	14.7	13.6	13.6
50°	12.6	12.6	12.6	12.6	12.6
52.5°	11.5	11.5	11.5	11.5	11.5
55°	10.5	10.5	10.5	10.5	10.5
57.5°	9.4	9.4	9.4	9.4	9.4
60°	8.4	8.4	8.4	8.4	8.4
62.5°	7.3	7.3	7.3	7.3	7.3
65°	6.3	6.3	6.3	6.3	6.3
67.5°	6.3	6.3	6.3	6.3	6.3
70°	5.2	5.2	5.2	5.2	5.2
72.5°	4.2	4.2	4.2	4.2	4.2
75°	3.1	3.1	3.1	3.1	4.2
77.5°	3.1	3.1	3.1	3.1	3.1
80°	2.1	2.1	2.1	2.1	2.1
82.5°	2.1	2.1	2.1	2.1	2.1
85°	1.0	1.0	1.0	1.0	1.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)